

Circe1 (internal Version 2.2):
Beam Spectra for Simulating Linear Collider
Physics*

Thorsten Ohl†

University of Würzburg
Emil-Hilb-Weg 22
D-97089 Würzburg
Germany

IKDA 96/13-rev
hep-ph/9607454-rev
July 1996 (expanded March 2014)

Abstract

I describe parameterizations of realistic e^\pm - and γ -beam spectra at future linear e^+e^- -colliders. Emphasis is put on simplicity and reproducibility of the parameterizations, supporting reproducible physics simulations. The parameterizations are implemented in a library of distribution functions and event generators.

Contents

1	Introduction	4
2	Parameters	5
3	Usage	11
3.1	Distributions	11
3.1.1	Example	14
3.2	Generators	19
3.2.1	Example	20
3.2.2	Event Generators	21
4	Technical Notes	22

*Supported by Bundesministerium für Bildung, Wissenschaft, Forschung und Technologie,
Germany.

†e-mail: ohl@physik.uni-wuerzburg.de

5 Parameterizations	23
5.1 Version 1	23
5.1.1 Fitting	27
5.1.2 Generators	29
5.2 Future Versions	29
6 Implementation of <code>circe1</code>	29
6.1 Symbolic Constants	30
6.2 Distributions	31
6.2.1 Version 1	31
6.2.2 Version 2	50
6.2.3 Versions 3 and 4	50
6.2.4 Version 5	53
6.2.5 Version 6	54
6.2.6 Version 7	56
6.2.7 Version 8	61
6.2.8 Version 9	63
6.2.9 Version 10	68
6.3 Special Functions	71
6.4 Non-Singular Distributions	73
6.5 Generators	78
6.5.1 Random-Number Generator	78
6.5.2 Version 1	80
6.5.3 Version 2	83
6.5.4 Version 3 and 4	83
6.6 Utilities	83
6.7 Examples	87
6.7.1 Distributions	87
6.7.2 Library functions	88
6.7.3 Generators	91
6.8 Dumping Parameters	91
7 Fitting	92
7.1 Version 1: Factorized Beta Distributions	93
7.2 Experimental	110
7.2.1 Quasi One Dimensional	110
7.2.2 Quasi Two Dimensional	115
7.3 Version 2	118
8 Conclusions	118
A Literate Programming	125
A.1 Paradigm	125
A.2 Practice	125
B Fortran Name Space	126
C Updates	126

Program Summary:

- **Title of program:** Circe1 (March 2014)
- **Program obtainable** by anonymous ftp from the host `crunch.ikp.physik.th-darmstadt.de` in the directory `pub/ohl/circe`.
- **Licensing provisions:** Free software under the GNU General Public License.
- **Programming language used:** Fortran77 originally, transferred to Fortran90
- **Number of program lines in distributed program, including test data, etc.:** ≈ 1100 (excluding comments)
- **Computer/Operating System:** Any with a Fortran90 programming environment.
- **Memory required to execute with typical data:** Negligible on the scale of typical applications calling the library.
- **Typical running time:** A small fraction (typically a few percent) of the running time of applications calling the library.
- **Purpose of program:** Provide simple and reproducible, yet realistic, parameterizations of the e^\pm - and γ -beam spectra for linear colliders.
- **Nature of physical problem:** The intricate beam dynamics in the interaction region of a high luminosity linear collider at $\sqrt{s} = 500\text{GeV}$ result in non-trivial energy spectra of the scattering electrons, positrons and photons. Physics simulations require simple and reproducible, yet realistic, parameterizations of these spectra.
- **Method of solution:** Parameterization, curve fitting, Monte Carlo event generation.
- **Keywords:** Event generation, beamstrahlung, linear colliders.

1 Introduction

Despite the enormous quantitative success of the electro-weak standard model up to energies of 200GeV, neither the nature of electro-weak symmetry breaking (EWSB) nor the origin of mass are understood.

From theoretical considerations, we know that clues to the answer of these open questions are hidden in the energy range below $\Lambda_{\text{EWSB}} = 4\pi v \approx 3.1\text{TeV}$. Either we will discover a Higgs particle in this energy range or signatures for a strongly interacting EWSB sector will be found. Experiments at CERN's Large Hadron Collider (LHC) will shed a first light on this regime in the next decade. In the past it has been very fruitful to complement experiments at high energy hadron colliders with experiments at e^+e^- -colliders. The simpler initial state allows more precise measurements with smaller theoretical errors. Lucid expositions of the physics opportunities of high energy e^+e^- colliders with references to the literature can be found in [1].

However, the power emitted by circular storage rings in form of synchrotron radiation scales like $(E/m)^4/R^2$ with the energy and mass of the particle and the radius of the ring. This cost becomes prohibitive after LEP2 and a Linear Collider (LC) has to be built instead.

Unfortunately, the “interesting” hard cross sections scale like $1/s$ with the square of the center of mass energy and a LC will have to operate at extremely high luminosities in excess of $10^{33}\text{cm}^{-2}\text{s}^{-1}$. To achieve such luminosities, the bunches of electrons and positrons have to be very dense. Under these conditions, the electrons undergo acceleration from strong electromagnetic forces from the positron bunch (and vice versa). The resulting synchrotron radiation is called *beamstrahlung* [2] and has a strong effect on the energy spectrum $D(x_1, x_2)$ of the colliding particles. This changes the observable e^+e^- cross sections

$$\frac{d\sigma_0^{e^+e^-}}{d\Omega}(s) \rightarrow \frac{d\sigma^{e^+e^-}}{d\Omega}(s) = \int_0^1 dx_1 dx_2 D_{e^+e^-}(x_1, x_2; \sqrt{s}) J(\Omega', \Omega) \frac{d\sigma_0^{e^+e^-}}{d\Omega'}(x_1 x_2 s) \quad (1a)$$

and produces luminosity for $e^\pm\gamma$ and $\gamma\gamma$ collisions:

$$\frac{d\sigma^{e^\pm\gamma}}{d\Omega}(s) = \int_0^1 dx_1 dx_2 D_{e^\pm\gamma}(x_1, x_2; \sqrt{s}) J(\Omega', \Omega) \frac{d\sigma_0^{e^\pm\gamma}}{d\Omega'}(x_1 x_2 s) \quad (1b)$$

$$\frac{d\sigma^{\gamma\gamma}}{d\Omega}(s) = \int_0^1 dx_1 dx_2 D_{\gamma\gamma}(x_1, x_2; \sqrt{s}) J(\Omega', \Omega) \frac{d\sigma_0^{\gamma\gamma}}{d\Omega'}(x_1 x_2 s) \quad (1c)$$

Therefore, simulations of the physics expected at a LC need to know the spectra of the e^\pm and γ beams precisely.

Microscopic simulations of the beam dynamics are available (e.g. **ABEL**[3], **CAIN**[4] and **Guinea-Pig**[5]) and their predictions are compatible with each other. But they require too much computer time and memory for direct use in physics programs. **Circe1** provides a fast and simple parameterization of the results from these simulations. Furthermore, even if the computational cost of the simulations would be negligible, the input parameters for microscopic simulations are not convenient for particle physics applications. Due to the highly

	SBAND	TESLA	XBAND	SBAND	TESLA	XBAND
E/GeV	250	250	250	500	500	500
$N_{\text{particles}}/10^{10}$	1.1	3.63	0.65	2.9	1.8	0.95
$\epsilon_x/10^{-6}\text{mrad}$	5	14	5	10	14	5
$\epsilon_y/10^{-6}\text{mrad}$	0.25	0.25	0.08	0.1	0.06	0.1
β_x^*/mm	10.98	24.95	8.00	32	25	10.00
β_y^*/mm	0.45	0.70	0.13	0.8	0.7	0.12
σ_x/nm	335	845	286	571.87	598.08	226
σ_y/nm	15.1	18.9	4.52	9.04	6.55	3.57
$\sigma_z/\mu\text{m}$	300	700	100	500	500	125
f_{rep}	50	5	180	50	5	180
n_{bunch}	333	1135	90	125	2270	90

Table 1: Accelerator parameters for three typical designs at $\sqrt{s} = 500\text{GeV}$ and $\sqrt{s} = 1\text{TeV}$. The resulting distributions are shown in figure 1. The design efforts are currently concentrated on a 350GeV-800GeV LC. Therefore the Tesla parameters for 1TeV are slightly out of date.

non-linear beam dynamics, the optimization of LC designs is a subtle art [6], that is best practiced by the experts. Furthermore, particle physics applications need benchmarking and easily reproducible parameterizations are required for this purpose.

The parameterizations in `Circe1` are not based on approximate solutions (cf. [7]) of the beamstrahlung dynamics. Instead, they provide a “phenomenological” description of the results from full simulations. The parameterizations are as simple as possible while remaining consistent with basic physical principles:

1. *positivity*: the distribution functions $D(x_1, x_2)$ *must not* be negative in the physical region $[0, 1] \times [0, 1]$.
2. *integrability*: the definite integral of the distribution functions over the physical region $[0, 1] \times [0, 1]$ *must* exist, even though the distributions can have singularities.

This paper is organized as follows: I start in section 2 with a discussion of the input for the microscopic simulations. In section 3 I describe the usage of the `Circe1` library and in section 4 I discuss some technical details of the implementation. After discussing the parameterizations available (in internal version 2.2) in section 5, I conclude in section 8.

2 Parameters

The microscopic simulation program `Guinea-Pig` [5] used for the current version of the parameterizations in `Circe1` simulates the passage of electrons through a

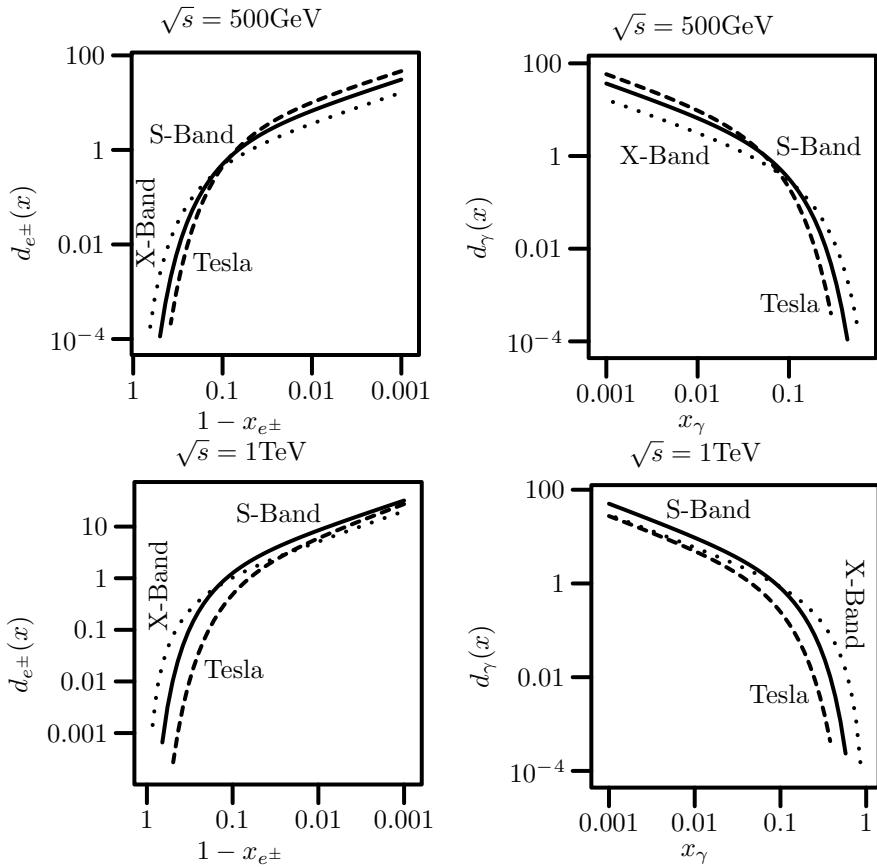


Figure 1: Version 1, revision 1996 09 02 of the factorized e^\pm - and γ -distributions at $\sqrt{s} = 500 \text{ GeV}$ and $\sqrt{s} = 1 \text{ TeV}$ in a doubly logarithmic plot. The accelerator parameters are taken from table 1.

	TESLA	TESLA	TESLA
E/GeV	175	250	400
$N_{\text{particles}}/10^{10}$	3.63	3.63	3.63
$\epsilon_x/10^{-6}\text{mrad}$	14	14	14
$\epsilon_y/10^{-6}\text{mrad}$	0.25	0.25	0.1
β_x^*/mm	25.00	24.95	15.00
β_y^*/mm	0.70	0.70	0.70
σ_x/nm	1010.94	845	668.67
σ_y/nm	22.6	18.9	9.46
$\sigma_z/\mu\text{m}$	700	700	700
f_{rep}	5	5	5
n_{bunch}	1135	1135	1135

Table 2: Accelerator parameters for the Tesla design at three planned [8] energies. The resulting distributions are shown in figure 2.

	High- \mathcal{L}	Low- \mathcal{L}	Low- ϵ_y
E/GeV	400	400	400
$N_{\text{particles}}/10^{10}$	3.63	3.63	1.800
$\epsilon_x/10^{-6}\text{mrad}$	14	14	12
$\epsilon_y/10^{-6}\text{mrad}$	0.1	0.25	0.025
β_x^*/mm	15.00	25.00	25.00
β_y^*/mm	0.70	0.70	0.50
σ_x/nm	668.67	700.00	
σ_y/nm	9.46		
$\sigma_z/\mu\text{m}$	700	700	500
f_{rep}	5	5	3
n_{bunch}	1135	1135	2260

Table 3: Variant accelerator parameters for the Tesla design at 800 GeV.

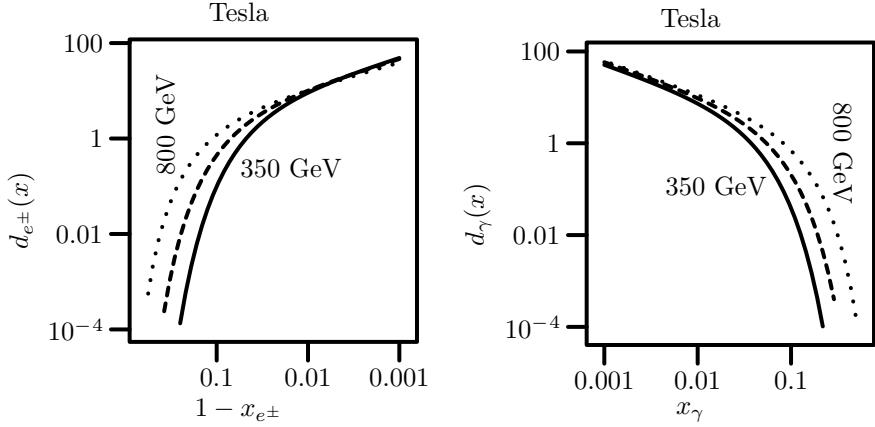


Figure 2: Version 1, revision 1996 09 02 of the factorized e^\pm - and γ -distributions for Tesla in a doubly logarithmic plot. The accelerator parameters are taken from table 2.

	TESLA	TESLA
E/GeV	250	400
$N_{\text{particles}}/10^{10}$	2	1.40
$\epsilon_x/10^{-6}\text{m rad}$	10	8
$\epsilon_y/10^{-6}\text{m rad}$	0.03	0.01
β_x^*/mm	15.00	15.00
β_y^*/mm	0.40	0.30
σ_x/nm	553	391
σ_y/nm	5	2
$\sigma_z/\mu\text{m}$	400	300
f_{rep}	5	3
n_{bunch}	2820	4500

Table 4: Accelerator parameters for a high luminosity Tesla design at two planned [8] energies. The resulting distributions are shown in figure 3.

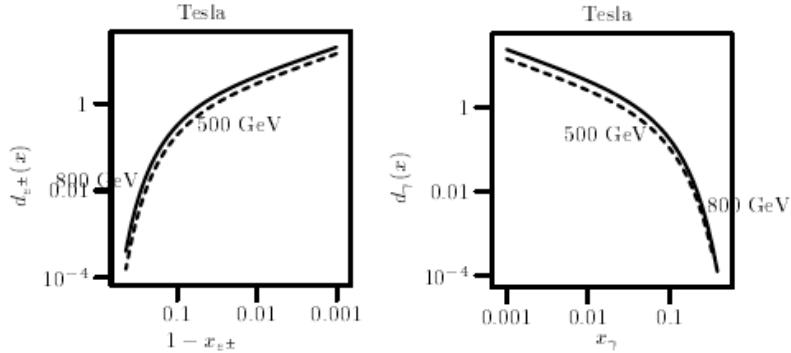


Figure 3: Version 5, revision 1998 05 05 of the factorized e^\pm - and γ -distributions for a high luminosity Tesla in a doubly logarithmic plot. The accelerator parameters are taken from table 4.

bunch of electrons (and vice versa). It takes the following accelerator parameters as input:

E : the energy of the particles before the beam-beam interaction.

$N_{\text{particles}}$: the number of particles per bunch.

$\epsilon_{x,y}$: the normalized horizontal and vertical emittances.

$\beta_{x,y}^*$: the horizontal and vertical beta functions.

$\sigma_{x,y,z}$: the horizontal, vertical and longitudinal beam size. A Gaussian shape is used for the charge distribution in the bunches.

f_{rep} : the repetition rate.

n_{bunch} : the number of bunches per train.

The transversal beam sizes, beta functions and normalized emittances for relativistic particles are related by

$$\beta_{x,y}^* = \frac{\sigma_{x,y}^2 E}{\epsilon_{x,y} m_e} \quad (2)$$

The parameters used in the most recent revision of the parameterizations are collected in tables 1 and 2. The resulting factorized electron/positron and photon distributions in version 1 of the parameterizations are depicted in figures 1 and 2.

The most important purpose of `Circe1` is to map the manifold of possible beam spectra for the NLC to a *finite* number of *reproducible* parameterizations. The distributions

$$D_{p_1 p_2}^{\alpha \nu \rho}(x_1, x_2; \sqrt{s}) \quad (3)$$

provided by `Circe1` are indexed by three integers

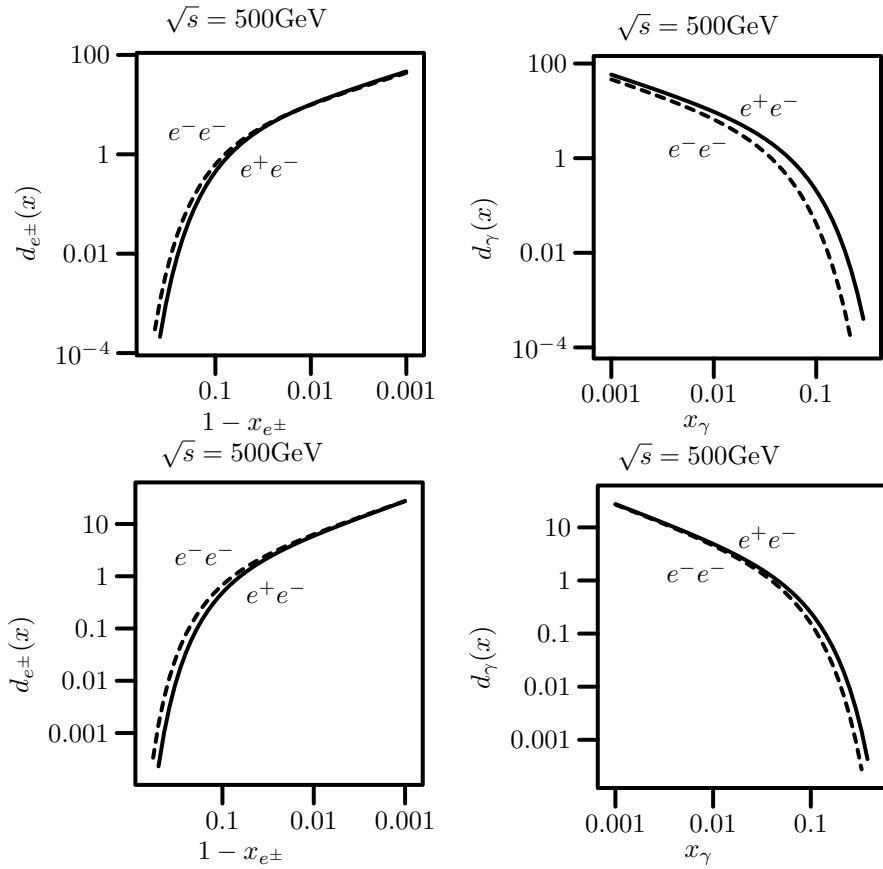


Figure 4: *Experimental:* Version 1, revision 0 of the factorized e^- - and γ -distributions for Tesla- e^-e^- in a doubly logarithmic plot. The accelerator parameters are taken from table 2 and have *not* been endorsed for use in an e^-e^- -machine yet!.

α : the *accelerator design class*: currently there are three options: S-band [9], Tesla [8], X-band [10, 11]. More variety will be added later, in particular the e^-e^- mode and the $e^-\gamma$ and $\gamma\gamma$ laser backscattering modes of these designs.

ν : the *version of the parameterization*: over the years, the form of the parameterizations can change, either because better approximations are found or because new simulation programs become available. All versions will remain available in order to be able to reproduce calculations.

ρ : the *revision date for the parameterization*: a particular parameterization can contain bugs, which will be fixed in subsequent revisions. While only the most recent revision should be used for new calculations, old revisions will remain available in order to be able to reproduce calculations.

The continuous parameter \sqrt{s} in (3) is misleading, because accelerator parameters have been optimized for discrete values of the energy. Therefore the distributions are not available for all values of \sqrt{s} .

The usage of the distributions in application programs is discussed in section 3.1. `Circe1` provides for each of the distributions a non-uniform random variate generator, that generates energy fractions according to the distributions. The usage of these generators is discussed in section 3.2.

3 Usage

3.1 Distributions

A generic interface to all distributions $D_{p_1 p_2}(x_1, x_2)$ is given by the `circe` function

11a *⟨API documentation 11a⟩≡*
`function circe, d, x1, x2`
`real(kind=double) :: circe`
`integer :: p1, p2`
`d = circe (x1, x2, p1, p2)`

12a▷

Uses `circe 31b`.

where the energy fractions are specified by $x_{1,2}$ and the particles $p_{1,2}$ are identified by their standard Monte Carlo codes (we use C1 as a prefix to avoid name clashes when using CIRCE1 inside WHIZARD):[13]

11b *⟨Particle codes 11b⟩≡*
`integer, parameter, public :: C1_ELECTRON = 11`
`integer, parameter, public :: C1_POSITRON = -11`
`integer, parameter, public :: C1_PHOTON = 22`

(30b)

Defines:

`C1_ELECTRON`, used in chunks 21e, 31b, 73b, 80c, and 81a.
`C1_PHOTON`, used in chunks 31b, 73b, 80c, 81a, and 87.
`C1_POSITRON`, used in chunks 22 and 81a.

The distributions can have integrable singularities at the end points, therefore the calling functions *must not* evaluate them at the endpoints 0 and 1. This is usually not a problem, since standard mapping techniques (cf. (10) below) will have to be used to take care of the singularity anyway. Nevertheless, all applications should favor open quadrature formulae (i.e. formulae not involving the endpoints) over closed formulae. The distributions are guaranteed to vanish unless $0 < x_{1,2} < 1$, with two exceptions. Firstly, the value -1 allows to pick up the integral of the continuum contribution:

$$D_{p_1 p_2}(-1, x_2) = \lim_{\epsilon \rightarrow +0} \int_{\epsilon}^{1-\epsilon} dx_1 D_{p_1 p_2}(x_1, x_2) \quad (4a)$$

$$D_{p_1 p_2}(x_1, -1) = \lim_{\epsilon \rightarrow +0} \int_{\epsilon}^{1-\epsilon} dx_2 D_{p_1 p_2}(x_1, x_2) \quad (4b)$$

$$D_{p_1 p_2}(-1, -1) = \lim_{\epsilon \rightarrow +0} \int_{\epsilon}^{1-\epsilon} dx_1 dx_2 D_{p_1 p_2}(x_1, x_2) \quad (4c)$$

The other exception is that the strength of δ -function contributions at the endpoint can be picked up from the value at this endpoint:

$$D_{e^+ e^-}(x_1, x_2) = D_{e^+ e^-}(1, 1)\delta(1 - x_1)\delta(1 - x_2) + \text{smooth and single } \delta \quad (5a)$$

$$D_{e^\pm \gamma}(x_1, x_2) = D_{e^\pm \gamma}(1, x_2)\delta(1 - x_1) + \text{smooth} \quad (5b)$$

$$D_{\gamma e^\pm}(x_1, x_2) = D_{\gamma e^\pm}(x_1, 1)\delta(1 - x_2) + \text{smooth} \quad (5c)$$

The use of these special values is demonstrated in an example in section 3.1.1 below.

The distributions are normalized such that

$$\lim_{\epsilon \rightarrow +0} \int_{-\epsilon}^{1+\epsilon} dx_1 dx_2 D_{e^+ e^-}(x_1, x_2) = 1. \quad (6)$$

and the nominal $e^+ e^-$ -luminosity of the currently active accelerator design can be retrieved from the database with the subroutine **circel**. The value is given in units of

$$\text{fb}^{-1} v^{-1} = 10^{32} \text{cm}^{-2} \text{sec}^{-1} \quad (7)$$

where $v = 10^7 \text{sec} \approx \text{year}/\pi$ is an “effective year” of running with about 30% up-time.

12a *(API documentation 11a)*+≡ ◀11a 12b▶
`real(kind=double) :: lumi
call circel (lumi)`

Uses **circel** 41e.

A particular parameterization is selected by the **circles** function:

12b *(API documentation 11a)*+≡ ◀12a 14▶
`real(kind=double) :: x1m, x2m, roots
integer :: acc, ver, rev, chat
call circles (x1m, x2m, roots, acc, ver, rev, chat)`

Uses **circles** 32a.

The parameter `roots` corresponds to the nominal center of mass energy \sqrt{s}/GeV of the collider. Currently $\sqrt{s} = 350\text{GeV}, 500\text{GeV}, 800\text{GeV}, 1\text{TeV}$ (i.e. 350D0, 500D0, 800D0 and 1000D0) are supported. Application programs can *not* assume that energy values are interpolated. For convenience, e.g. in top threshold scans around 350GeV, a small interval around the supported values will be accepted as synonymous with the central value, but a warning will be printed. Section 5 should be consulted for the discrete values supported by a particular version of the parameterizations. Negative values of `roots` will keep the currently active value for \sqrt{s} .

The parameters `x1m` and `x2m` will set thresholds $x_{1,\min}$ and $x_{2,\min}$ for the event generation in the routines described in section 3.2.

The parameter `acc` selects the accelerator design. Currently the following accelerator codes are recognized:

13a $\langle \text{Accelerator codes } 13a \rangle \equiv$ (17b 30b 35f 92) 13b>
 integer, parameter :: SBAND = 1
 integer, parameter :: TESLA = 2
 integer, parameter :: XBAND = 3
 integer, parameter :: JLCNLc = 3
 integer, parameter :: SBNDEE = 4
 integer, parameter :: TESLEE = 5
 integer, parameter :: XBNDEE = 6
 integer, parameter :: NLCH = 7
 integer, parameter :: ILC = 8
 integer, parameter :: CLIC = 9

Defines:

CLIC, used in chunk 35d.
 ILC, used in chunks 35d, 69–71, and 92.
 JLCNLc, used in chunks 17b, 18, 35d, 57a, 60–63, 66c, 67c, and 92.
 SBAND, used in chunks 35d, 40, 44–47, 49b, 50a, 92, 107c, and 108c.
 SBNDEE, used in chunks 34b, 35d, 41b, 44c, 46–49, and 92.
 TESLA, used in chunks 32, 35d, 40, 44–47, 49–54, 56, 57, 59d, 60b, 62, 66b, 67b, 91b, 92, 107c, 108c, and 110a.
 TESLEE, used in chunks 34b, 35d, 48, and 92.
 XBAND, used in chunks 40, 44–47, 49b, 50a, 57d, 107c, and 108c.
 XBNDEE, used in chunks 34b, 35d, 48, 49a, 91b, and 92.

The total number of accelerator codes

13b $\langle \text{Accelerator codes } 13a \rangle + \equiv$ (17b 30b 35f 92) <13a
 integer, parameter :: NACC = 9

Defines:

NACC, used in chunks 17b, 34, 35, 40, 41, 44–47, 51d, 53e, 56a, 59c, 62a, and 66a.

The `ver` parameter is used to determine the version as follows:

`ver > 0` : a frozen version which is documented in section 5. For example, version 1 is a family of factorized Beta distributions: $D(x_1, x_2) \propto x_1^{a_1}(1 - x_1)^{b_1}x_2^{a_2}(1 - x_2)^{b_2}$.

`ver = 0` : the latest experimental version, which is usually not documented and can change at any time without announcement.

`ver < 0` : keep the currently active version.

The `rev` parameter is used to determine the revision of a version as follows:

`rev > 0` : a frozen revision which is documented in section 5. The integer `rev` is constructed from the date as follows: $\text{rev} = 10^4 \cdot \text{year} + 10^2 \cdot \text{month} + \text{day}$, where the year is greater than 1995. Since Fortran77 ignored whitespace, it could be written like 1996 07 11 for readability. In Fortran90 the white space have been erased. If there is no exact match, the most recent revision before the specified date is chosen.

`rev = 0` : the most recent revision.

`rev < 0` : keep the currently active revision.

Finally, the parameter `chat` controls the “chattiness” of `circe`. If it is 0, only error messages are printed. If it is 1, the parameters in use are printed whenever they change. Higher values of `chat` can produce even more diagnostics.

In addition to the generic interface `circe`, there are specialized functions for particular particle distributions. Obviously

$$D_{e^\pm\gamma}^{\alpha\nu\rho}(x_1, x_2, s) = D_{\gamma e^\pm}^{\alpha\nu\rho}(x_2, x_1, s) \quad (8)$$

and there are three independent functions $D_{e^-e^+}$, $D_{e^-\gamma}$ and $D_{\gamma\gamma}$ for the e^+e^- colliders with reasonable mnemonics:

14 `<API documentation 11a>+≡` ◀ 12b ▶ 20a ▷
`real(kind=double) :: circee, circdeg, circgg`
`d = circee (x1, x2)`
`d = circdeg (x1, x2)`
`d = circgg (x1, x2)`

Uses `circee` 41g, `circdeg` 42c, and `circgg` 43c.

Calling the latter three functions is marginally faster in the current implementation, but this can change in the future.

3.1.1 Example

For clarification, let me give a simple example. Imagine we want to calculate the integrated production cross section

$$\sigma_X(s) = \int dx_1 dx_2 \sigma_{e^+e^- \rightarrow X}(x_1 x_2 s) D_{e^+e^-}(x_1, x_2, s) \quad (9)$$

Since the distributions are singular in the $x_{1,2} \rightarrow 1$ limit, we have to map away this singularity with

$$x \rightarrow t = (1 - x)^{1/\eta} \quad (10a)$$

Therefore

$$\int_0^1 dx f(x) = \int_0^1 dt \eta t^{\eta-1} f(1 - t^\eta) \quad (10b)$$

with η sufficiently large to give the integrand a finite limit at $x \rightarrow 1$. If f diverges like a power $f(x) \propto 1/(1-x)^\beta$, this means $\eta > 1/(1-\beta)$.

As a specific example, let us “measure” a one particle s -channel exchange cross section

$$\sigma(s) \propto \frac{1}{s} \quad (11)$$

```

15a <circe1_sample.f90: public 15a>≡ (17b) 15d▷
    public :: sigma
    Uses sigma 15b.

15b <circe1_sample.f90: subroutines 15b>≡ (17b) 15e▷
    function sigma (s)
        real(kind=double) :: s, sigma
        sigma = 1d0 / s
    end function sigma

```

Defines:

sigma, used in chunks 15–18 and 20d.

I will present the example code in a bottom-up fashion, which should be intuitive and is described in some more detail in appendix A. Assuming the existence of a one- and a two-dimensional Gaussian integration function `gauss1` and `gauss2`,¹ we can perform the integral as follows:

```

15c <Gauss integration 15c>≡ (17b)
    s = sigma (1d0) * circee (1d0, 1d0) &
        + gauss1 (d1, 0d0, 1d0, EPS) &
        + gauss1 (d2, 0d0, 1d0, EPS) &
        + gauss2 (d12, 0d0, 1d0, 0d0, 1d0, EPS)
    write (*, 1000) 'delta(sigma) (Gauss) =', (s-1d0)*100d0
    1000 format (1X, A22, 1X, F6.2, '%')

```

Uses `circee` 41g, `d1` 16a, `d12` 15e, `d2` 16c, `gauss1` 89f, `gauss2` 90d, and `sigma` 15b.

Note how the four combinations of continuum and δ -peak are integrated separately, where you have to use three auxiliary functions `d1`, `d2` and `d12`. The continuum contribution, including the Jacobian:

```

15d <circe1_sample.f90: public 15a>+≡ (17b) ▷15a 15f▷
    public :: d12
    Uses d12 15e.

```

```

15e <circe1_sample.f90: subroutines 15b>+≡ (17b) ▷15b 16a▷
    function d12 (t1, t2)
        real(kind=double) :: d12, t1, t2, x1, x2
        <EPS & PWR 16d>
        x1 = 1d0 - t1**PWR
        x2 = 1d0 - t2**PWR
        d12 = PWR*PWR * (t1*t2)**(PWR-1d0) &
            * sigma (x1*x2) * circee (x1, x2)
    end function d12

```

Defines:

d12, used in chunk 15.

Uses `circee` 41g and `sigma` 15b.

the first product of continuum and δ -peak:

```

15f <circe1_sample.f90: public 15a>+≡ (17b) ▷15d 16b▷
    public :: d1
    Uses d1 16a.

```

¹They are provided in the example program `circe1_sample.f90`.

```

16a  <circe1_sample.f90: subroutines 15b>+≡          (17b) ◁ 15e 16c▷
      function d1 (t1)
        real(kind=double) :: t1, x1, d1
        <EPS & PWR 16d>
        x1 = 1d0 - t1**PWR
        d1 = PWR * t1**(PWR-1d0) * sigma (x1) * circee (x1, 1d0)
      end function d1

```

Defines:

d1, used in chunks 15, 41–43, and 74–77.

Uses circee 41g and sigma 15b.

and the second one:

```

16b  <circe1_sample.f90: public 15a>+≡          (17b) ◁ 15f 16g▷
      public :: d2
      Uses d2 16c.

```

```

16c  <circe1_sample.f90: subroutines 15b>+≡          (17b) ◁ 16a 17a▷
      function d2 (t2)
        real(kind=double) :: t2, x2, d2
        <EPS & PWR 16d>
        x2 = 1d0 - t2**PWR
        d2 = PWR * t2**(PWR-1d0) * sigma (x2) * circee (1d0, x2)
      end function d2

```

Defines:

d2, used in chunks 15c, 16b, 41–43, and 74–77.

Uses circee 41g and sigma 15b.

Below you will see that the power of the singularity of the e^+e^- distributions at $x \rightarrow 1$ is $\approx -2/3$. To be on the safe side, we choose the power η in (10) as 5. It is kept in the parameter PWR, while EPS is the desired accuracy of the Gaussian integration:

```

16d  <EPS & PWR 16d>≡          (15–17) 16f▷
      real(kind=double), parameter :: EPS = 1d-6, PWR = 5d0

```

The Gauss integration of the non-singular version converges to the correct value only if the final bin is integrated separately:

```

16e  <Second Gauss integration 16e>≡          (17b)
      s = gauss2 (d12a, 0d0, 1d0-KIREPS, 0d0, 1d0-KIREPS, EPS) &
           + gauss2 (d12a, 0d0, 1d0-KIREPS, 1d0-KIREPS, 1d0, EPS) &
           + gauss2 (d12a, 1d0-KIREPS, 1d0, 0d0, 1d0-KIREPS, EPS) &
           + gauss2 (d12a, 1d0-KIREPS, 1d0, 1d0-KIREPS, 1d0, EPS)
      write (*, 1000) 'delta(sigma) (Gauss) =', (s-1d0)*100d0
      Uses d12a 17a, gauss2 90d, and sigma 15b.

```

```

16f  <EPS & PWR 16d>+≡          (15–17) ◁ 16d
      real(kind=double), parameter :: KIREPS = 1D-6

```

```

16g  <circe1_sample.f90: public 15a>+≡          (17b) ◁ 16b 21a▷
      public :: d12a
      Uses d12a 17a.

```

```

17a  <circe1_sample.f90: subroutines 15b>+≡          (17b) <16c 21b>
      function d12a (x1, x2)
        real(kind=double) :: x1, x2, d12a
        d12a = sigma (x1*x2) * kirkee (x1, x2)
      end function d12a

Defines:
  d12a, used in chunk 16.
Uses kirkee 74b and sigma 15b.

These code fragments can now be used in a main program that loops over
energies and accelerator designs

17b  <circe1_sample.f90 17b>≡
      ! circe1_sample.f90 -- canonical beam spectra for linear collider physics
      ! $Id: prelude.nw 6466 2015-01-10 16:06:40Z jr_reuter $
      <Copyleft notice 29b>
      module sample_routines
        use kinds
        use circe1 !NODEP!

        implicit none
        private

      <circe1_sample.f90: public 15a>

contains

      <circe1_sample.f90: subroutines 15b>

end module sample_routines

program circe1_sample
  use kinds
  use sample_routines
  use circe1

  implicit none

  <Accelerator codes 13a>
  <EPS & PWR 16d>
  <Other variables in sample 19>
  integer :: acc, ver, i
  real(kind=double), dimension(9) :: roots(9) = &
    (/ 90D0, 170D0, 250D0, 350D0, 500D0, &
     800D0, 1000D0, 1200D0, 1500D0 /)
  do acc = 1, NACC
    ! do acc = JLCNLC, NLCH, NLCH-JLCNLC
    do ver = 9, 9
      do i = 1, 9
        call circes (0d0, 0d0, roots(i), acc, ver, 20020328, 1)
      <Gauss integration 15c>
    end do
  end do
end program

```

```

    ⟨Second Gauss integration 16e⟩
    ⟨Monte Carlo integration 20d⟩
    end do
    end do
    end do
end program circe1_sample

```

Uses [circes 32a](#), [JLCNLC 13a](#), and [NACC 13b](#).

with the following result

18 ⟨Sample output 18⟩≡

```

circe1:message: starting up ...
circe1:message: $Id: prelude.nw 6466 2015-01-10 16:06:40Z jr_reuter $
circe1:message: updating 'roots' to 90.0
circe1:message: updating 'ver' to 7
circe1:message: updating 'rev' to 20000501
delta(sigma) (Gauss) = 0.11%
delta(sigma) (MC) = 0.11%
+/- 0.00%
circe1:message: updating 'roots' to 170.0
circe1:message: updating 'ver' to 7
delta(sigma) (Gauss) = 0.38%
delta(sigma) (MC) = 0.38%
+/- 0.01%
circe1:message: updating 'roots' to 350.0
circe1:message: updating 'ver' to 7
delta(sigma) (Gauss) = 1.67%
delta(sigma) (MC) = 1.66%
+/- 0.03%
circe1:message: updating 'roots' to 500.0
circe1:message: updating 'ver' to 7
delta(sigma) (Gauss) = 3.66%
delta(sigma) (MC) = 3.58%
+/- 0.07%
circe1:message: updating 'roots' to 800.0
circe1:message: updating 'ver' to 7
delta(sigma) (Gauss) = 5.21%
delta(sigma) (MC) = 5.19%
+/- 0.11%
circe1:message: updating 'roots' to 1000.0
circe1:message: updating 'ver' to 7
circe1:message: energy 1000.0GeV too high, using spectrum for 800.0GeV
delta(sigma) (Gauss) = 5.21%
delta(sigma) (MC) = 5.19%
+/- 0.11%
circe1:message: updating 'roots' to 90.0
circe1:message: updating 'acc' to JLCNLC
circe1:message: updating 'ver' to 7
circe1:message: energy 90.0GeV too low, using spectrum for 500.0GeV
delta(sigma) (Gauss) = 4.74%

```

```

delta(sigma) (MC)      = 4.75%
                         +/- 0.11%
circe1:message: updating 'roots' to 170.0
circe1:message: updating 'ver' to 7
circe1:message: energy 170.0GeV too low, using spectrum for 500.0GeV
delta(sigma) (Gauss) = 4.74%
delta(sigma) (MC)     = 4.68%
                         +/- 0.11%
circe1:message: updating 'roots' to 350.0
circe1:message: updating 'ver' to 7
circe1:message: energy 350.0GeV too low, using spectrum for 500.0GeV
delta(sigma) (Gauss) = 4.74%
delta(sigma) (MC)     = 4.75%
                         +/- 0.11%
circe1:message: updating 'roots' to 500.0
circe1:message: updating 'ver' to 7
delta(sigma) (Gauss) = 4.74%
delta(sigma) (MC)     = 4.75%
                         +/- 0.11%
circe1:message: updating 'roots' to 800.0
circe1:message: updating 'ver' to 7
circe1:message: energy 800.0GeV interpolated between 500.0 and 1000.0GeV
delta(sigma) (Gauss) = 8.37%
delta(sigma) (MC)     = 8.39%
                         +/- 0.21%
circe1:message: updating 'roots' to 1000.0
circe1:message: updating 'ver' to 7
delta(sigma) (Gauss) = 15.39%
delta(sigma) (MC)     = 14.68%
                         +/- 0.33%

```

Uses JLCNLC 13a and sigma 15b.

We almost forgot to declare the variables in the main program

19 ⟨Other variables in sample 19⟩≡ (17b) 20e▷
real(kind=double) :: s

This concludes the integration example. It should have made it obvious how to proceed in a realistic application.

In section 3.2.1 below, I will describe a Monte Carlo method for calculating such integrals efficiently.

3.2 Generators

The function `circe` and its companions are opaque to the user. Since they will in general contain singularities, applications will *not* be able to generate corresponding samples of random numbers efficiently. To fill this gap, four random number generators are provided. The subroutine `girce` will generate particle types $p_{1,2}$ and energy fractions $x_{1,2}$ in one step, according to the selected distribution.² Particle p_1 will be either a positron or a photon and p_2 will be

²The implementation of the flavor selection with non-vanishing thresholds $x_{1,\min}$ and $x_{2,\min}$ is moderately inefficient at the moment. It can be improved by a factor of two.

either an electron or a photon. The energy fractions are guaranteed to be above the currently active thresholds: $x_i \geq x_{i,\min}$. This can be used to cut on soft events—the photon distributions are rather soft—which might not be interesting in most simulations.

20a $\langle API \text{ documentation } 11a \rangle + \equiv$ ◀14 ▶20b
`call girce (x1, x2, p1, p2, rng)`
 Uses `girce 80c`.

The output parameters of `girce` are identical to the input parameters of `circe`, with the exception of `rng`. The latter is a subroutine with a single double precision argument, which will be assigned a uniform deviate from the interval $[0, 1]$ after each call:

20b $\langle API \text{ documentation } 11a \rangle + \equiv$ ◀20a ▶20c
`subroutine rng (r)`
`real(kind=double) :: r`
`r = <uniform deviate on [0, 1] (never defined)>`
`end subroutine rng`

Typically, it will be just a wrapper around the standard random number generator of the application program. For studies with a definite initial state, three generator functions are available.

20c $\langle API \text{ documentation } 11a \rangle + \equiv$ ◀20b
`call gircee (x1, x2, rng)`
`call girceg (x1, x2, rng)`
`call gircgg (x1, x2, rng)`
 Uses `gircee 81e`, `girceg 82c`, and `gircgg 83c`.

3.2.1 Example

Returning to the example from section 3.2.1, I present a concise Monte Carlo algorithm for calculating the same integral:

20d $\langle \text{Monte Carlo integration } 20d \rangle + \equiv$ (17b)
`s = 0d0`
`s2 = 0d0`
`do n = 1, NEVENT`
 `call gircee (x1, x2, random)`
 `w = sigma (x1*x2)`
 `s = s + w`
 `s2 = s2 + w*w`
`end do`
`s = s / dble(NEVENT)`
`s2 = s2 / dble(NEVENT)`
`write (*, 1000) 'delta(sigma) (MC) =', (s-1d0)*100d0`
`write (*, 1000) ' +/-', sqrt((s2-s*s)/dble(NEVENT))*100d0`
 Uses `gircee 81e`, `random 21b`, and `sigma 15b`.

20e $\langle \text{Other variables in sample } 19 \rangle + \equiv$ (17b) ▶19
`real(kind=double) :: w, s2, x1, x2`
`integer, parameter :: NEVENT = 10000`
`integer :: n`

Here is a simple linear congruential random number generator for the sample program. Real applications will use their more sophisticated generators instead.

```
21a <circle1_sample.f90: public 15a>+≡ (17b) ◁16g 89e▷
    public :: random
    Uses random 21b.

21b <circle1_sample.f90: subroutines 15b>+≡ (17b) ◁17a 89f▷
    subroutine random (r)
        real(kind=double), intent(out) :: r
        integer :: m = 259200, a = 7141, c = 54773
        integer, save :: n = 0
        ! data n /0/
        n = mod(n*a+c,m)
        r = real (n, kind=double) / real (m, kind=double)
    end subroutine random
```

Defines:

random, used in chunks 20 and 21.

If the cross section is slowly varying on the range where the $x_{1,2}$ distributions are non-zero, this algorithm is very efficient.

However, if this condition is not met, the explicit form of the parameterizations in section 5 should be consulted and appropriate mapping techniques should be applied. The typical example for this problem is a narrow resonance just below the nominal beam energy.

3.2.2 Event Generators

For Monte Carlo event generators that use the standard /hepevt/ common block [14], the addition of the `Circe1` library is trivial. During the initialization of the event generator, the `circles` subroutine is called to set up `Circe1`'s internal state. For example:

```
21c <Initialize event generator 21c>≡
    call circles (0d0, 0d0, roots, acc, ver, 1996 07 11, 1)
Uses circles 32a.
```

During event generation, before setting up the e^+e^- initial state, the `gircee` subroutine is called with the event generator's random number generator:

```
21d <Event generation 21d>≡ (21e) ◁
    call gircee (x1, x2, random)
```

Uses `gircee` 81e and `random` 21b.

The resulting energy fractions x_1 and x_2 are now available for defining the initial state electron

```
21e <Event generation 21d>+≡ (21d 22) ◁
    isthep(1) = 101
    idhep(1) = C1_ELECTRON
    phep(1,1) = 0d0
    phep(2,1) = 0d0
    phep(3,1) = x1 * ebeam
    phep(4,1) = x1 * ebeam
    phep(5,1) = 0d0
```

Uses `C1_ELECTRON` 11b.

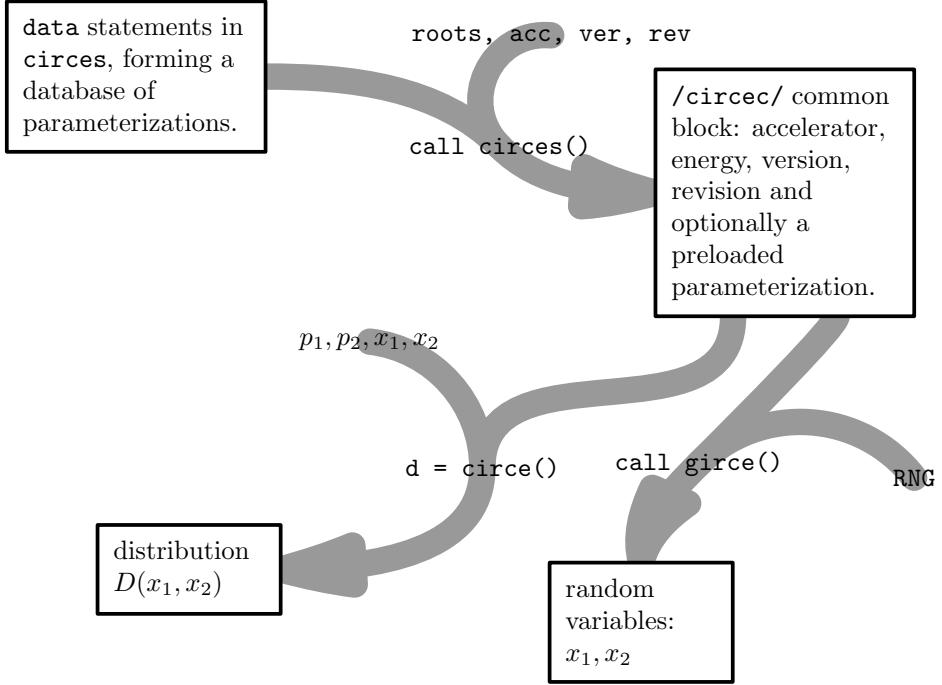


Figure 5: Architecture of `Circe1`: `circes()` selects energy and accelerator and loads the parameterization. The function `circe()` calculates the values of the selected distribution function at the given energy fractions. The subroutine `girce()` generates energy fractions using a specified random number generator in accordance with the selected distribution.

and positron.

22 *<Event generation 21d>+≡* *↳ 21e*
 `isthep(2) = 102`
 `idhep(2) = C1_POSITRON`
 `phep(1,2) = 0d0`
 `phep(2,2) = 0d0`
 `phep(3,2) = - x2 * ebeam`
 `phep(4,2) = x2 * ebeam`
 `phep(5,2) = 0d0`

Uses `C1_POSITRON 11b`.

Using `Circe1` with other event generators should be straightforward as well.

4 Technical Notes

The structure of `Circe1` is extremely simple (cf. figure 5) and is mainly a book-keeping excercise. All that needs to be done is to maintain a database of available parameterizations and to evaluate the corresponding functions. The only non trivial algorithms are used for the efficient generation of random deviates.

	SBAND	TESLA	TESLA'	XBAND
$\mathcal{L}/\text{fb}^{-1}\nu^{-1}$	$31.38^{+0.22}_{-0.22}$	$106.25^{+0.71}_{-0.71}$	$95.24^{+0.73}_{-0.73}$	$36.39^{+0.29}_{-0.29}$
$\int d_{e^\pm}$	$0.4812^{+0.0041}_{-0.0041}$	$0.5723^{+0.0046}_{-0.0045}$	$0.3512^{+0.0048}_{-0.0048}$	$0.3487^{+0.0040}_{-0.0040}$
$x_{e^\pm}^\alpha$	$11.1534^{+0.0770}_{-0.0761}$	$15.2837^{+0.0923}_{-0.0914}$	$27.1032^{+0.3071}_{-0.3019}$	$6.9853^{+0.0733}_{-0.0718}$
$(1 - x_{e^\pm})^\alpha$	$-0.6302^{+0.0013}_{-0.0012}$	$-0.6166^{+0.0011}_{-0.0011}$	$-0.6453^{+0.0017}_{-0.0017}$	$-0.6444^{+0.0017}_{-0.0017}$
$\int d_\gamma$	$0.6237^{+0.0033}_{-0.0033}$	$0.7381^{+0.0036}_{-0.0036}$	$0.3502^{+0.0034}_{-0.0034}$	$0.4149^{+0.0031}_{-0.0031}$
x_γ^α	$-0.6911^{+0.0006}_{-0.0006}$	$-0.6921^{+0.0006}_{-0.0006}$	$-0.6947^{+0.0011}_{-0.0011}$	$-0.6876^{+0.0010}_{-0.0010}$
$(1 - x_\gamma)^\alpha$	$14.9355^{+0.0761}_{-0.0754}$	$24.1647^{+0.1124}_{-0.1116}$	$33.6576^{+0.3021}_{-0.2983}$	$8.3227^{+0.0659}_{-0.0649}$

Table 5: Version 1, revision 1997 04 16 of the beam spectra at 500 GeV. The rows correspond to the luminosity per effective year, the integral over the continuum and the powers in the factorized Beta distributions (12).

I have avoided the use of initialized `common` blocks (i.e. `block data` subroutines), because the Fortran77 standard does not provide a *portable* way of ensuring that `block data` subroutines are actually executed at loading time³. Instead, the `/circcom/` common block is tagged by a “magic number” to check for initialization and its members are filled by the `circses` subroutine when necessary.

A more flexible method would be to replace the `data` statements by reading external files. This option causes portability problems, however, because I would have to make sure that the names of the external files are valid in all file systems of the target operating systems. More significantly, splitting the implementation into several parts forces the user to keep all files up to date. This can be a problem, because Fortran source files and data input files will typically be kept in different parts of the file system.

The option of implementing `Circe1` statelessly, i.e. with pure function calls and without `common` blocks, has been dismissed. While it would have been more straightforward on the side of the library, it would have placed the burden of maintaining state (accelerator, energy, etc.) on the application program, thereby complicating them considerably. Keeping an explicit state in `Circe1` has the additional benefit of allowing to precompute certain internal variables, resulting in a more efficient implementation.

5 Parameterizations

The internal Version 2.2 of `Circe11` supports just one version of the parameterizations. Future versions will provide additional parameterizations.

5.1 Version 1

The first version of the parameterization uses a simple factorized *ansatz*

$$D_{p_1 p_2}^{\alpha 1 \rho}(x_1, x_2, s) = d_{p_1}^{\alpha 1 \rho}(x_1) d_{p_2}^{\alpha 1 \rho}(x_2) \quad (12a)$$

³In Fortran90 the common blocks have been replaced by saved module variables.

	SBAND	TESLA	TESLA'	XBAND
$\mathcal{L}/\text{fb}^{-1}\nu^{-1}$	$119.00^{+0.83}_{-0.83}$	214.33^{+0***}_{-0***}	212.22^{+0***}_{-0***}	$118.99^{+0.91}_{-0.91}$
$\int d_{e^\pm}$	$0.5604^{+0.0040}_{-0.0039}$	$0.6686^{+0.0040}_{-0.0040}$	$0.4448^{+0.0043}_{-0.0043}$	$0.5001^{+0.0038}_{-0.0038}$
$x_{e^\pm}^\alpha$	$4.2170^{+0.0258}_{-0.0255}$	$5.5438^{+0.0241}_{-0.0239}$	$9.6341^{+0.0814}_{-0.0803}$	$2.6184^{+0.0192}_{-0.0190}$
$(1 - x_{e^\pm})^\alpha$	$-0.6118^{+0.0013}_{-0.0013}$	$-0.5847^{+0.0011}_{-0.0011}$	$-0.6359^{+0.0014}_{-0.0014}$	$-0.6158^{+0.0015}_{-0.0015}$
$\int d_\gamma$	$0.7455^{+0.0032}_{-0.0032}$	$1.0112^{+0.0033}_{-0.0033}$	$0.4771^{+0.0031}_{-0.0031}$	$0.6741^{+0.0031}_{-0.0031}$
x_γ^α	$-0.6870^{+0.0006}_{-0.0006}$	$-0.6908^{+0.0004}_{-0.0004}$	$-0.6936^{+0.0008}_{-0.0008}$	$-0.6834^{+0.0007}_{-0.0007}$
$(1 - x_\gamma)^\alpha$	$6.7145^{+0.0310}_{-0.0308}$	$9.9992^{+0.0342}_{-0.0340}$	$13.1607^{+0.0896}_{-0.0886}$	$3.8589^{+0.0215}_{-0.0213}$

Table 6: Version 1, revision 1997 04 17 of the beam spectra at 1 TeV.

	350 GeV	500 GeV	800 GeV	1600 GeV
$\mathcal{L}/\text{fb}^{-1}\nu^{-1}$	$97.45^{+0.67}_{-0.67}$	$106.25^{+0.71}_{-0.71}$	170.86^{+0***}_{-0***}	340.86^{+0***}_{-0***}
$\int d_{e^\pm}$	$0.6093^{+0.0049}_{-0.0049}$	$0.5723^{+0.0046}_{-0.0045}$	$0.6398^{+0.0042}_{-0.0041}$	$0.5094^{+0.0040}_{-0.0040}$
$x_{e^\pm}^\alpha$	$17.6137^{+0.1065}_{-0.1055}$	$15.2837^{+0.0923}_{-0.0914}$	$7.6221^{+0.0365}_{-0.0361}$	$5.0550^{+0.0353}_{-0.0349}$
$(1 - x_{e^\pm})^\alpha$	$-0.6061^{+0.0011}_{-0.0011}$	$-0.6166^{+0.0011}_{-0.0011}$	$-0.5944^{+0.0011}_{-0.0011}$	$-0.6187^{+0.0013}_{-0.0013}$
$\int d_\gamma$	$0.7729^{+0.0039}_{-0.0039}$	$0.7381^{+0.0036}_{-0.0036}$	$0.9178^{+0.0034}_{-0.0034}$	$0.5875^{+0.0031}_{-0.0031}$
x_γ^α	$-0.6949^{+0.0006}_{-0.0006}$	$-0.6921^{+0.0006}_{-0.0006}$	$-0.6908^{+0.0005}_{-0.0005}$	$-0.6892^{+0.0007}_{-0.0007}$
$(1 - x_\gamma)^\alpha$	$28.9399^{+0.1370}_{-0.1361}$	$24.1647^{+0.1124}_{-0.1116}$	$13.1167^{+0.0497}_{-0.0495}$	$7.5514^{+0.0428}_{-0.0424}$

Table 7: Version 1, revision 1997 04 17 of the beam spectra for TESLA.

	500 GeV	800 GeV
$\mathcal{L}/\text{fb}^{-1}\nu^{-1}$	$339.80^{+0.83}_{-0.83}$	$359.36^{+0.93}_{-0.93}$
$\int d_{e^\pm}$	$0.5019^{+0.0016}_{-0.0016}$	$0.4125^{+0.0016}_{-0.0016}$
$x_{e^\pm}^\alpha$	$12.2867^{+0.0318}_{-0.0316}$	$13.3242^{+0.0442}_{-0.0440}$
$(1 - x_{e^\pm})^\alpha$	$-0.6276^{+0.0005}_{-0.0005}$	$-0.6401^{+0.0005}_{-0.0005}$
$\int d_\gamma$	$0.5114^{+0.0012}_{-0.0012}$	$0.3708^{+0.0011}_{-0.0011}$
x_γ^α	$-0.6912^{+0.0003}_{-0.0003}$	$-0.6924^{+0.0004}_{-0.0004}$
$(1 - x_\gamma)^\alpha$	$17.0673^{+0.0375}_{-0.0375}$	$16.8145^{+0.0482}_{-0.0480}$

Table 8: Version 5, revision 1998 05 05 of the beam spectra for high luminosity TESLA.

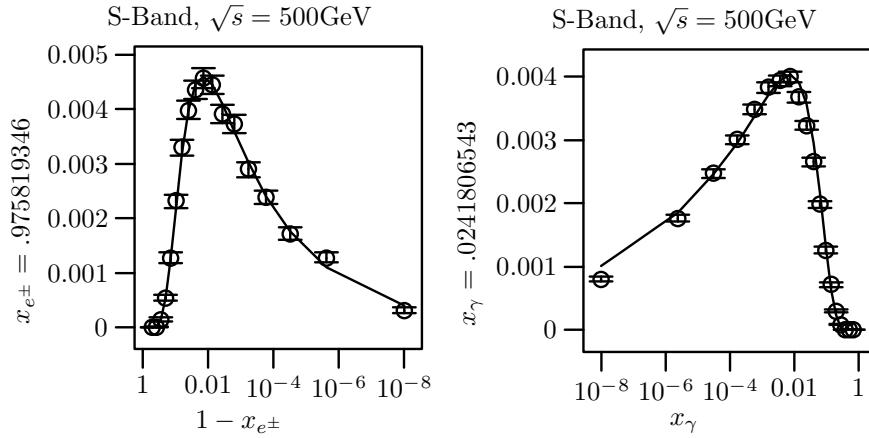


Figure 6: Fit of the e^\pm - and γ -distributions for the S-Band design at $\sqrt{s} = 500\text{GeV}$. The open circles with error bars are the result of the Guinea-Pig simulation. The full line is the fit.

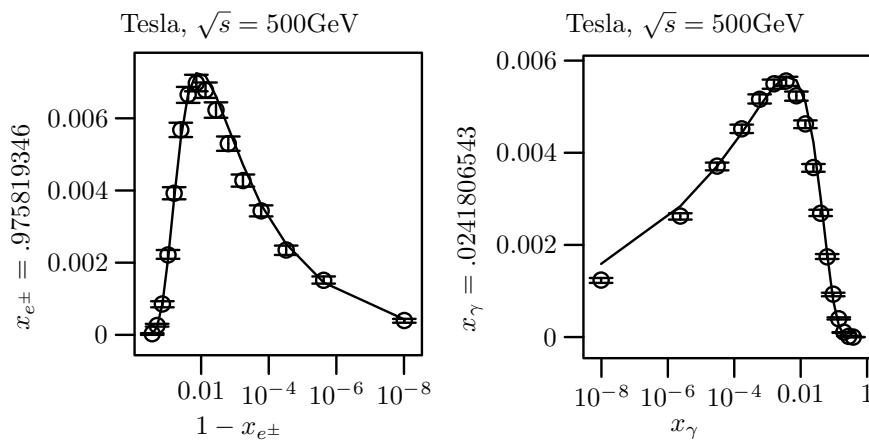


Figure 7: Fit of the e^\pm - and γ -distributions for the Tesla design at $\sqrt{s} = 500\text{GeV}$.

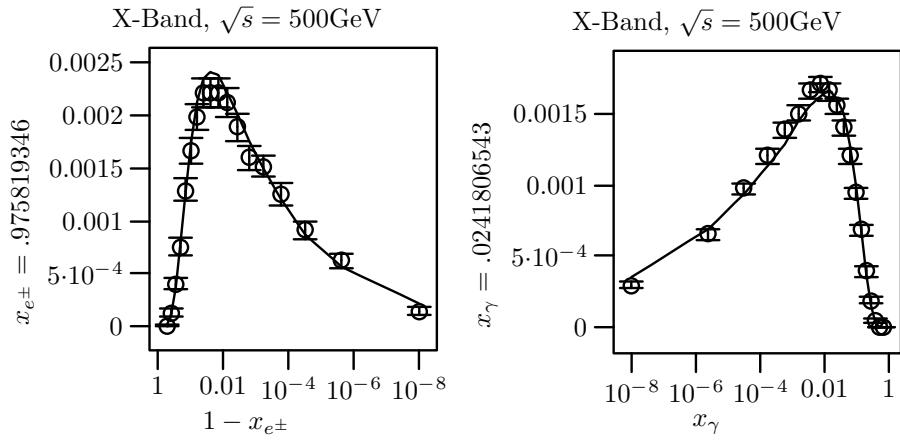


Figure 8: Fit of the e^\pm - and γ -distributions for the X-Band design at $\sqrt{s} = 500\text{GeV}$.

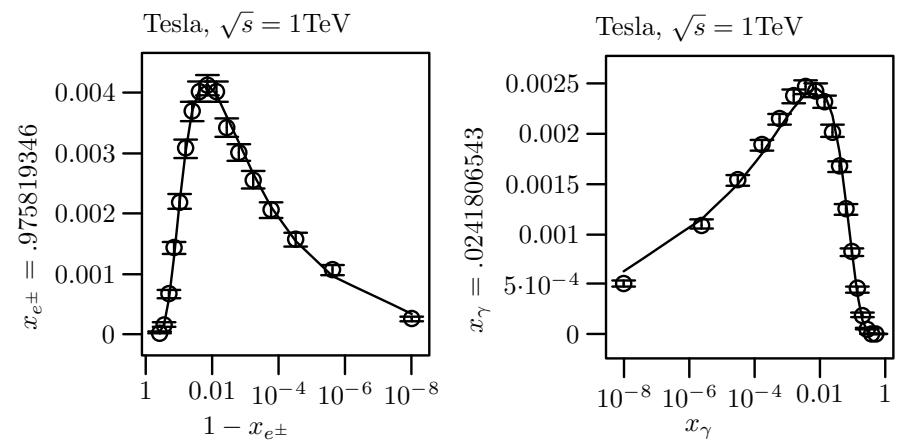


Figure 9: Fit of the e^\pm - and γ -distributions for the Tesla design at $\sqrt{s} = 1\text{TeV}$.

	SBNDEE	TESLEE	XBNDEE
$\mathcal{L}/\text{fb}^{-1}v^{-1}$	$9.29^{+0.06}_{-0.06}$	$21.62^{+0.17}_{-0.17}$	$13.97^{+0.10}_{-0.10}$
$\int d_{e^\pm}$	$.6513^{+0.0059}_{-0.0059}$	$.7282^{+0.0083}_{-0.0082}$	$.5270^{+0.0049}_{-0.0049}$
$x_{e^\pm}^\alpha$	$10.3040^{+0.0601}_{-0.0593}$	$14.8578^{+0.1047}_{-0.1034}$	$5.8897^{+0.0455}_{-0.0448}$
$(1 - x_{e^\pm})^\alpha$	$-.5946^{+0.0015}_{-0.0015}$	$-.5842^{+0.0018}_{-0.0018}$	$-.6169^{+0.0016}_{-0.0015}$
$\int d_\gamma$	$.4727^{+0.0035}_{-0.0035}$	$.5300^{+0.0046}_{-0.0046}$	$.3746^{+0.0029}_{-0.0029}$
x_γ^α	$-.6974^{+0.0009}_{-0.0009}$	$-.7039^{+0.0009}_{-0.0009}$	$-.6892^{+0.0010}_{-0.0010}$
$(1 - x_\gamma)^\alpha$	$20.6447^{+0.1513}_{-0.1497}$	$36.1286^{+0.3027}_{-0.2991}$	$10.0872^{+0.0822}_{-0.0815}$

Table 9: *Experimental* Version 1, revision 0 of the beam spectra at 500 GeV. The rows correspond to the luminosity per effective year, the integral over the continuum and the powers in the factorized Beta distributions (12).

	SBNDEE	TESLEE	XBNDEE
$\mathcal{L}/\text{fb}^{-1}v^{-1}$	$45.59^{+0.34}_{-0.34}$	$25.47^{+0.20}_{-0.20}$	$41.06^{+0.28}_{-0.28}$
$\int d_{e^\pm}$	$.7892^{+0.0075}_{-0.0074}$	$.6271^{+0.0066}_{-0.0065}$	$.7203^{+0.0058}_{-0.0058}$
$x_{e^\pm}^\alpha$	$5.4407^{+0.0285}_{-0.0281}$	$8.7504^{+0.0669}_{-0.0658}$	$2.7415^{+0.0121}_{-0.0119}$
$(1 - x_{e^\pm})^\alpha$	$-.5285^{+0.0020}_{-0.0020}$	$-.6058^{+0.0017}_{-0.0017}$	$-.5049^{+0.0020}_{-0.0020}$
$\int d_\gamma$	$.6403^{+0.0040}_{-0.0040}$	$.4278^{+0.0038}_{-0.0038}$	$.6222^{+0.0032}_{-0.0032}$
x_γ^α	$-.6960^{+0.0008}_{-0.0008}$	$-.6982^{+0.0010}_{-0.0010}$	$-.6795^{+0.0008}_{-0.0008}$
$(1 - x_\gamma)^\alpha$	$12.4803^{+0.0839}_{-0.0831}$	$18.5260^{+0.1674}_{-0.1655}$	$4.7506^{+0.0262}_{-0.0260}$

Table 10: *Experimental* Version 1, revision 0 of the beam spectra at 1 TeV.

where the distributions are simple Beta distributions:

$$d_{e^\pm}^{\alpha 1 \rho}(x) = a_0^{\alpha \rho} \delta(1-x) + a_1^{\alpha \rho} x^{a_2^{\alpha \rho}} (1-x)^{a_3^{\alpha \rho}} \quad (12b)$$

$$d_\gamma^{\alpha 1 \rho}(x) = a_4^{\alpha \rho} x^{a_5^{\alpha \rho}} (1-x)^{a_6^{\alpha \rho}} \quad (12c)$$

This form of the distributions is motivated by the observation [2] that the e^\pm distributions diverge like a power for $x \rightarrow 1$ and vanish at $x \rightarrow 0$. The behavior of the γ distributions is similar with the borders exchanged.

5.1.1 Fitting

The parameters a_i in (12) have been obtained by a least-square fit of (12) to histograms of simulation results from **Guinea-Pig**. Some care has to be taken when fitting singular distributions to histogrammed data. Obviously equidistant bins are not a good idea, because most bins will be almost empty (cf. figures 1 and 2) and consequently a lot of information will be wasted. One solution to this problem is the use of logarithmic bins. This, however, maps the compact region $[0, 1] \times [0, 1]$ to $[-\infty, 0] \times [-\infty, 0]$, which is inconvenient because of the missing lower bounds.

	350 GeV	500 GeV	800 GeV
$\mathcal{L}/\text{fb}^{-1}\nu^{-1}$	$15.18^{+0.13}_{-0.13}$	$21.62^{+0.17}_{-0.17}$	$43.98^{+0.38}_{-0.38}$
$\int d_{e^\pm}$	$.6691^{+0.0083}_{-0.0083}$	$.7282^{+0.0083}_{-0.0082}$	$.7701^{+0.0090}_{-0.0089}$
$x_{e^\pm}^\alpha$	$25.2753^{+0.2040}_{-0.2007}$	$14.8578^{+0.1047}_{-0.1034}$	$8.1905^{+0.0543}_{-0.0535}$
$(1 - x_{e^\pm})^\alpha$	$-.5994^{+0.0017}_{-0.0017}$	$-.5842^{+0.0018}_{-0.0018}$	$-.5575^{+0.0021}_{-0.0021}$
$\int d_\gamma$	$.4464^{+0.0047}_{-0.0047}$	$.5300^{+0.0046}_{-0.0046}$	$.5839^{+0.0047}_{-0.0047}$
x_γ^α	$-.7040^{+0.0011}_{-0.0011}$	$-.7039^{+0.0009}_{-0.0009}$	$-.7046^{+0.0009}_{-0.0009}$
$(1 - x_\gamma)^\alpha$	$60.1882^{+0.5882}_{-0.5797}$	$36.1286^{+0.3027}_{-0.2991}$	$19.3944^{+0.1681}_{-0.1660}$

Table 11: *Experimental* Version 1, revision 0 of the beam spectra for TESLEE.

The more appropriate solution is to use two maps

$$\begin{aligned} \phi : [0, 1] &\rightarrow [0, 1] \\ x \mapsto y &= x^{1/\eta} \end{aligned} \tag{13}$$

where $x = x_\gamma$ or $x = 1 - x_{e^\pm}$, and to bin the result equidistantly. If η is chosen properly (cf. (10)), the bin contents will then fall off at the singularity. The fits in tables 5, 6, and 7 have been performed with $\eta = 5$ and the resulting bin contents can be read off from figures 6–9.

Using this procedure for binning the results of the simulations, the popular fitting package MINUIT [15] converges quickly in all cases considered. The resulting parameters are given in tables 5, 6, and 7. Plots of the corresponding distributions have been shown in figures 1 and 2. It is obvious that an *ansatz* like (12) is able to distinguish among the accelerator designs. Thus it can provide a solid basis for physics studies.

In figures 6–9 I give a graphical impression of the quality of the fit, which appears to be as good as one could reasonably expect for a simple *ansatz* like (12). Note that the histograms have non-equidistant bins and that the resulting Jacobians have not been removed. Therefore the bin contents falls off at the singularities, as discussed above.

The errors used for the least-square fit had to be taken from a Monte Carlo (MC) study. *Guinea-Pig* only provides the \sqrt{n} from Poissonian statistics for each bin, but the error accumulation during tracking the particles through phase space is not available. The MC studies shows that the latter error dominates the former, but appears to be reasonably Gaussian. A complete MC study of all parameter sets is computationally expensive (more than a week of processor time on a fast SGI). From an exemplary MC study of a few parameter sets, it appears that the errors can be described reasonably well by rescaling the Poissonian error in each bin with appropriate factors for electrons/positrons and photons and for continuum and delta. This procedure has been adopted.

The $\chi^2/\text{d.o.f.}'s$ of the fits are less than $\mathcal{O}(10)$. The simple *ansatz* (12) is therefore very satisfactory. In fact, trying to improve the ad-hoc factorized Beta distributions by the better motivated approximations from [7] or [16], it turns out [17] that (12) provides a significantly better fit of the results of the simulations. The price to pay is that the parameters in (12) have no direct

physical interpretation.

5.1.2 Generators

For this version of the parameterizations we need a fast generator of Beta distributions:

$$\beta^{a,b}(x) \propto x^{a-1}(1-x)^{b-1} \quad (14)$$

This problem has been studied extensively and we can use a published algorithm [18] that is guaranteed to be very fast for all a, b such that $0 < a \leq 1 \leq b$, which turns out to be always the case (cf. tables 5, 6, and 7).

5.2 Future Versions

There are two ways in which the parameterizations can be improved:

more complicated functions: the factorized fits can only be improved marginally by adding more positive semi-definite factors to (12). More improvement is possible by using sums of functions, but in this case, the best fits violate the positivity requirement and have to be discarded.

correlations: the parameterization in section 5.1 is factorized. While this is a good approximation, the simulations nevertheless show correlations among x_1 and x_2 . These correlations can be included in a future version.

interpolation: the parameterization in section 5.1 is based on fitting the simulation results by simple functions. Again, this appears to be a good approximation. But such fits can not uncover any fine structure of the distributions. Therefore it will be worthwhile to study interpolations of the simulation results in the future. A proper interpolation of results with statistical errors is however far from trivial: straightforward polynomial or spline interpolations will be oscillatory and violate the positivity requirement. Smoothing algorithms have to be investigated in depth before such a parameterization can be released.

other simulations: besides [5], other simulation codes are invited to contribute their results for inclusion in the `Circe1` library.

6 Implementation of `circe1`

```
29a  <circe1.f90 29a>≡
      ! circe1.f90 -- canonical beam spectra for linear collider physics
      ! $Id: circe1.nw 7444 2016-02-17 15:37:20Z jr_reuter $
      <Copyleft notice 29b>
      <Main module 30b>

29b  <Copyleft notice 29b>≡
      !
      ! Copyright (C) 1999-2020 by
      ! Wolfgang Kilian <kilian@physik.uni-siegen.de>
      ! Thorsten Ohl <ohl@physik.uni-wuerzburg.de>
```

```

! Juergen Reuter <juergen.reuter@desy.de>
! with contributions from
! Christian Speckner <cnspeckn@googlemail.com>
!
! WHIZARD is free software; you can redistribute it and/or modify it
! under the terms of the GNU General Public License as published by
! the Free Software Foundation; either version 2, or (at your option)
! any later version.
!
! WHIZARD is distributed in the hope that it will be useful, but
! WITHOUT ANY WARRANTY; without even the implied warranty of
! MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
! GNU General Public License for more details.
!
! You should have received a copy of the GNU General Public License
! along with this program; if not, write to the Free Software
! Foundation, Inc., 675 Mass Ave, Cambridge, MA 02139, USA.
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
! This file has been stripped of most comments. For documentation, refer
! to the source 'circe1.nw'

```

Now we can move on to the implementation.

6.1 Symbolic Constants

The file `circe.h` contains symbolic names for various magic constants used by `Circe1`:

30a `<circe.h 30a>`
`c circe.h -- canonical beam spectra for linear collider physics`
`c $Id: circe1.nw 7444 2016-02-17 15:37:20Z jr_reuter $`
 Uses `circe 31b`.

30b `<Main module 30b>`
`(29a)`
`module circe1`
`use kinds`

`implicit none`
`private`
`<Public subroutines 31a>`

`<Public types 79d>`

`<Particle codes 11b>`
`<Accelerator codes 13a>`
`<Private parameters 37c>`

`integer, parameter, public :: MAGICO = 19040616`
`real(kind=double), parameter :: KIREPS = 1D-6`

`<Declaration: circe1 parameters 32c>`

```

type(circe1_params_t), public, save :: circe1_params

(Abstract types 79e)

(Abstract interfaces 79c)

contains

(Module subroutines 31b)
end module circe1

```

6.2 Distributions

6.2.1 Version 1

We start with a convenience function which dispatches over the valid particle types. The hardest part is of course to avoid typos in such trivial functions ...

31a *(Public subroutines 31a)≡* (30b) 31c▷
 public :: **circe**
 Uses **circe** 31b.

31b *(Module subroutines 31b)≡* (30b) 32a▷
 function **circe** (x1, x2, p1, p2)
 real(kind=double) :: x1, x2
 integer :: p1, p2
 real(kind=double) :: **circe**
(Initialization check 32g)
circe = -1.0
 if (abs(p1) .eq. C1_ELECTRON) then
 if (abs(p2) .eq. C1_ELECTRON) then
circe = **circee** (x1, x2)
 else if (p2 .eq. C1_PHOTON) then
circe = **circg** (x1, x2)
 end if
 else if (p1 .eq. C1_PHOTON) then
 if (abs(p2) .eq. C1_ELECTRON) then
circe = **circg** (x2, x1)
 else if (p2 .eq. C1_PHOTON) then
circe = **circgg** (x1, x2)
 end if
 end if
end function **circe**

Defines:

circe, used in chunks 11a, 30a, 31a, 87, 93b, 110b, and 115d.
 Uses C1_ELECTRON 11b, C1_PHOTON 11b, **circee** 41g, **circg** 42c, and **circgg** 43c.

31c *(Public subroutines 31a)+≡* (30b) <31a 32b>
 public :: **circes**
 Uses **circes** 32a.

```

32a  ⟨Module subroutines 31b⟩+≡                               (30b) ◁31b 35f▷
      subroutine circles (xx1m, xx2m, xroots, xacc, xver, xrev, xchat)
          real(kind=double) :: xx1m, xx2m, xroots
          integer :: xacc, xver, xrev, xchat
      ⟨Local variables for circles 33b⟩
      ⟨Initializations for circles 35b⟩
          if (circe1_params%magic .ne. 19040616) then
              circe1_params%magic = 19040616
          ⟨Initialize circe1 parameters 32h⟩
          end if
      ⟨Update circe1 parameters 33a⟩
      ⟨formats for circles 38d⟩
      end subroutine circles
Defines:
circles, used in chunks 12b, 17b, 21c, 31c, 32g, 35f, 87, and 91b.

32b  ⟨Public subroutines 31a⟩+≡                               (30b) ◁31c 35e▷
      public :: circe1_params_t

32c  ⟨Declaration: circe1 parameters 32c⟩≡                  (30b)
      type :: circe1_params_t
      ⟨8-byte aligned part of circe1 parameters 32d⟩
      ⟨4-byte aligned part of circe1 parameters 32e⟩
      end type circe1_params_t

32d  ⟨8-byte aligned part of circe1 parameters 32d⟩≡          (32c) 40a▷
      real(kind=double) :: x1m = 0d0
      real(kind=double) :: x2m = 0d0
      real(kind=double) :: roots = 500D0

32e  ⟨4-byte aligned part of circe1 parameters 32e⟩≡          (32c) 32f▷
      integer :: acc = TESLA
      integer :: ver = 0
      integer :: rev = 0
      integer :: chat = 1
Uses TESLA 13a.
Instead of using fragile block data subroutines, we use a magic number to tag
circe1_params as initialized:

32f  ⟨4-byte aligned part of circe1 parameters 32e⟩+≡          (32c) ◁32e
      integer :: magic
Since negative values are no updated, we can call circles with all negative
variables to ensure initialization:

32g  ⟨Initialization check 32g⟩≡                           (31b 41–43 73b 74b 76c 77a 80–83)
      if (circe1_params%magic .ne. MAGIC0) then
          call circles (-1d0, -1d0, -1d0, -1, -1, -1, -1)
      endif
Uses circes 32a.

32h  ⟨Initialize circe1 parameters 32h⟩≡                      (32a)
      circe1_params%x1m = 0d0
      circe1_params%x2m = 0d0

```

```

circe1_params%roots = 500D0
circe1_params%acc = TESLA
circe1_params%ver = 0
circe1_params%rev = 0
circe1_params%chat = 1
if (xchat .ne. 0) then
    call circem ('MESSAGE', 'starting up ...')
    call circem ('MESSAGE', &
        '$Id: circe1.nw 7444 2016-02-17 15:37:20Z jr_reuter $')
endif
Uses circem 86e and TESLA 13a.

33a  <Update circe1 parameters 33a>≡ (32a) 33c▷
    if ((xchat .ge. 0) .and. (xchat .ne. circe1_params%chat)) then
        circe1_params%chat = xchat
        if (circe1_params%chat .ge. 1) then
            write (msgbuf, 1000) 'chat', circe1_params%chat
1000      format ('updating ', A, '' to ', I2)
            call circem ('MESSAGE', msgbuf)
        endif
    else
        if (circe1_params%chat .ge. 2) then
            write (msgbuf, 1100) 'chat', circe1_params%chat
1100      format ('keeping ', A, '' at ', I2)
            call circem ('MESSAGE', msgbuf)
        endif
    endif
Uses circem 86e.

33b  <Local variables for circes 33b>≡ (32a) 35a▷
    character(len=60) :: msgbuf

33c  <Update circe1 parameters 33a>+≡ (32a) ▷33a 33d▷
    if ((xx1m .ge. 0d0) .and. (xx1m .ne. circe1_params%x1m)) then
        circe1_params%x1m = xx1m
        if (circe1_params%chat .ge. 1) then
            write (msgbuf, 1001) 'x1min', circe1_params%x1m
1001      format ('updating ', A, '' to ', E12.4)
            call circem ('MESSAGE', msgbuf)
        endif
    else
        if (circe1_params%chat .ge. 2) then
            write (msgbuf, 1101) 'x1min', circe1_params%x1m
1101      format ('keeping ', A, '' at ', E12.4)
            call circem ('MESSAGE', msgbuf)
        endif
    endif
Uses circem 86e.

33d  <Update circe1 parameters 33a>+≡ (32a) ▷33c 34a▷
    if ((xx2m .ge. 0d0) .and. (xx2m .ne. circe1_params%x2m)) then
        circe1_params%x2m = xx2m

```

```

        if (circe1_params%chat .ge. 1) then
            write (msgbuf, 1001) 'x2min', circe1_params%x2m
            call circem ('MESSAGE', msgbuf)
        endif
    else
        if (circe1_params%chat .ge. 2) then
            write (msgbuf, 1101) 'x2min', circe1_params%x2m
            call circem ('MESSAGE', msgbuf)
        endif
    endif
endif

Uses circem 86e.

34a  <Update circe1 parameters 33a>+≡                               (32a) ◁33d 34b▷
      if ((xroots .ge. 0d0) .and.(xroots .ne. circe1_params%roots)) then
          circe1_params%roots = xroots
          if (circe1_params%chat .ge. 1) then
              write (msgbuf, 1002) 'roots', circe1_params%roots
1002      format ('updating ', A, '' to ', F6.1)
              call circem ('MESSAGE', msgbuf)
          endif
      else
          if (circe1_params%chat .ge. 2) then
              write (msgbuf, 1102) 'roots', circe1_params%roots
1102      format ('keeping ', A, '' at ', F6.1)
              call circem ('MESSAGE', msgbuf)
          endif
      endif
endif

Uses circem 86e.

34b  <Update circe1 parameters 33a>+≡                               (32a) ◁34a 36b▷
      if ((xacc .ge. 0) .and.(xacc .ne. circe1_params%acc)) then
          if ((xacc .ge. 1) .and. (xacc .le. NACC)) then
              circe1_params%acc = xacc
              if (circe1_params%chat .ge. 1) then
                  write (msgbuf, 1003) 'acc', accnam(circe1_params%acc)
1003      format ('updating ', A, '' to ', A)
                  call circem ('MESSAGE', msgbuf)
              endif
          else
              write (msgbuf, 1203) xacc
1203      format ('invalid 'acc': ', I8)
              call circem ('ERROR', msgbuf)
              write (msgbuf, 1103) 'acc', accnam(circe1_params%acc)
1103      format ('keeping ', A, '' at ', A)
              call circem ('MESSAGE', msgbuf)
          endif
      else
          if (circe1_params%chat .ge. 2) then
              write (msgbuf, 1003) 'acc', accnam(circe1_params%acc)
              call circem ('MESSAGE', msgbuf)
          endif

```

```

        endif
        if ((circe1_params%acc .eq. SBNDEE) .or. (circe1_params%acc .eq. TESLEE) &
            .or. (circe1_params%acc .eq. XBNDEE)) then
    <Warn that no parameter set has been endorsed for e-e- yet 36a>
        endif
    Uses circem 86e, NACC 13b, SBNDEE 13a, TESLEE 13a, and XBNDEE 13a.

35a  <Local variables for circes 33b>+≡ (32a) ◁33b 37a▷
    <Declaration of accnam 35c>

35b  <Initializations for circes 35b>≡ (32a) 40d▷
    <Initialization of accnam 35d>

35c  <Declaration of accnam 35c>≡ (35)
    character(len=6), dimension(NACC) :: accnam
    Uses NACC 13b.

35d  <Initialization of accnam 35d>≡ (35)
    data accnam(SBAND) /'SBAND'/
    data accnam(TESLA) /'TESLA'/
    data accnam(JLCNLc) /'JLCNLc'/
    data accnam(SBNDEE) /'SBNDEE'/
    data accnam(TESLEE) /'TESLEE'/
    data accnam(XBNDEE) /'XBNDEE'/
    data accnam(NLCH) /'NLCH'/
    data accnam(ILC) /'ILC'/
    data accnam(CLIC) /'CLIC'/
    Uses CLIC 13a, ILC 13a, JLCNLc 13a, SBAND 13a, SBNDEE 13a, TESLA 13a, TESLEE 13a,
    and XBNDEE 13a.

35e  <Public subroutines 31a>+≡ (30b) ◁32b 41d▷
    public :: circex
    Uses circex 35f.

35f  <Module subroutines 31b>+≡ (30b) ◁32a 41e▷
    subroutine circex (xx1m, xx2m, xroots, cacc, xver, xrev, xchat)
        real(kind=double) :: xx1m, xx2m, xroots
        character(*) :: cacc
        integer :: xver, xrev, xchat
        integer :: xacc, i
    <Accelerator codes 13a>
    <Declaration of accnam 35c>
    <Initialization of accnam 35d>
        xacc = -1
        do i = 1, NACC
            if (trim (accnam(i)) == trim (cacc)) then
                xacc = i
            end if
        end do
        call circes (xx1m, xx2m, xroots, xacc, xver, xrev, xchat)
    end subroutine circex
    Defines:
        circex, used in chunk 35e.
    Uses circes 32a and NACC 13b.

```

```

36a  <Warn that no parameter set has been endorsed for e-e- yet 36a>≡ (34b)
      call circem ('WARNING', '*****')
      call circem ('WARNING', '* The accelerator parameters have *')
      call circem ('WARNING', '* not been endorsed for use in    *')
      call circem ('WARNING', '* an e-e- collider yet!!!        *')
      call circem ('WARNING', '*****')
Uses circem 86e.

36b  <Update circe1 parameters 33a>+≡ (32a) ▷34b 36c▷
      if (xver .ge. 0) then
          circe1_params%ver = xver
          if (circe1_params%chat .ge. 1) then
              write (msgbuf, 1000) 'ver', circe1_params%ver
              call circem ('MESSAGE', msgbuf)
          endif
      else
          if (circe1_params%chat .ge. 2) then
              write (msgbuf, 1100) 'ver', circe1_params%ver
              call circem ('MESSAGE', msgbuf)
          endif
      endif
      endif
Uses circem 86e.

36c  <Update circe1 parameters 33a>+≡ (32a) ▷36b 36d▷
      if ((xrev .ge. 0) .and.(xrev .ne. circe1_params%rev)) then
          circe1_params%rev = xrev
          if (circe1_params%chat .ge. 1) then
              write (msgbuf, 1004) 'rev', circe1_params%rev
1004      format ('updating ', A, '' to ', I8)
              call circem ('MESSAGE', msgbuf)
          endif
      else
          if (circe1_params%chat .ge. 2) then
              write (msgbuf, 1104) 'rev', circe1_params%rev
1104      format ('keeping ', A, '' at ', I8)
              call circem ('MESSAGE', msgbuf)
          endif
      endif
      endif
Uses circem 86e.

Versions 3 and 4 are identical to version 1, except for TESLA at 800 GeV.

36d  <Update circe1 parameters 33a>+≡ (32a) ▷36c 74d▷
      ver34 = 0
      if ((circe1_params%ver .eq. 1) .or. (circe1_params%ver .eq. 0)) then
<Update version 1 derived parameters in circe1 parameters 37d>
      else if ((circe1_params%ver .eq. 3) .or. (circe1_params%ver .eq. 4)) then
          ver34 = circe1_params%ver
          circe1_params%ver = 1
<Update version 3 and 4 derived parameters in circe1 parameters 50c>
      else if (circe1_params%ver .eq. 5) then
          circe1_params%ver = 1

```

```

⟨Update version 5 derived parameters in circe1 parameters 53a⟩
    else if (circe1_params%ver .eq. 6) then
        circe1_params%ver = 1
⟨Update version 6 derived parameters in circe1 parameters 54c⟩
    else if (circe1_params%ver .eq. 7) then
        circe1_params%ver = 1
⟨Update version 7 derived parameters in circe1 parameters 56d⟩
    else if (circe1_params%ver .eq. 8) then
        circe1_params%ver = 1
⟨Update version 8 derived parameters in circe1 parameters 61a⟩
    else if (circe1_params%ver .eq. 9) then
        circe1_params%ver = 1
⟨Update version 9 derived parameters in circe1 parameters 63a⟩
    else if (circe1_params%ver .eq. 10) then
        circe1_params%ver = 1
⟨Update version 10 derived parameters in circe1 parameters 68b⟩
⟨else handle invalid versions 37b⟩

37a  ⟨Local variables for circes 33b⟩≡                               (32a) ◁35a 39f▷
      integer :: ver34

37b  ⟨else handle invalid versions 37b⟩≡                           (36d 41–43 74b 76c 77a 81–83)
      else if (circe1_params%ver .eq. 2) then
      ⟨Version 2 has been retired 50b⟩
          else if (circe1_params%ver .gt. 10) then
              call circem ('PANIC', 'versions >10 not available yet')
              return
          else
              call circem ('PANIC', 'version must be positive')
              return
          end if
      Uses circem 86e.

37c  ⟨Private parameters 37c⟩≡                                     (30b)
      integer :: e, r, ehi, elo

37d  ⟨Update version 1 derived parameters in circe1 parameters 37d⟩≡   (36d) 38b▷
      if (circe1_params%rev .eq. 0) then
          r = 0
      elseif (circe1_params%rev .ge. 19970417) then
          r = 5
      elseif (circe1_params%rev .ge. 19960902) then
          r = 4
      elseif (circe1_params%rev .ge. 19960729) then
          r = 3
      elseif (circe1_params%rev .ge. 19960711) then
          r = 2
      elseif (circe1_params%rev .ge. 19960401) then
          r = 1
      elseif (circe1_params%rev .lt. 19960401) then
          call circem ('ERROR', &
                      'no revision of version 1 before 96/04/01 available')

```

```

        call circem ('MESSAGE', 'falling back to default')
        r = 1
    endif
    if (circe1_params%chat .ge. 2) then
        write (msgbuf, 2000) circe1_params%rev, r
2000    format ('mapping date ', I8, ' to revision index ', I2)
        call circem ('MESSAGE', msgbuf)
    endif
Uses circem 86e.

38a  <Log revision mapping 38a>≡ (50c 53a 54c 56d 61a 63a 68b)
    if (circe1_params%chat .ge. 2) then
        write (msgbuf, 2000) circe1_params%rev, r
        call circem ('MESSAGE', msgbuf)
    endif
Uses circem 86e.

38b  <Update version 1 derived parameters in circe1 parameters 37d>+≡ (36d) ▷37d 39b▷
    <Map roots to e 38c>

38c  <Map roots to e 38c>≡ (38b 51a 53b) 38e▷
    if (circe1_params%roots .eq. 350d0) then
        e = GEV350
    else if ((circe1_params%roots .ge. 340d0) .and. (circe1_params%roots .le. 370d0))
        write (msgbuf, 2001) circe1_params%roots, 350d0
        call circem ('MESSAGE', msgbuf)
        e = GEV350
Uses circem 86e.

38d  <formats for circes 38d>≡ (32a) 39c▷
    2001 format ('treating energy ', F6.1, 'GeV as ', F6.1, 'GeV')

38e  <Map roots to e 38c>+≡ (38b 51a 53b) ▷38c 39a▷
    else if (circe1_params%roots .eq. 500d0) then
        e = GEV500
    else if ((circe1_params%roots .ge. 480d0) .and. (circe1_params%roots .le. 520d0))
        write (msgbuf, 2001) circe1_params%roots, 500d0
        call circem ('MESSAGE', msgbuf)
        e = GEV500
    else if (circe1_params%roots .eq. 800d0) then
        e = GEV800
    else if ((circe1_params%roots .ge. 750d0) .and. (circe1_params%roots .le. 850d0))
        write (msgbuf, 2001) circe1_params%roots, 800d0
        call circem ('MESSAGE', msgbuf)
        e = GEV800
    else if (circe1_params%roots .eq. 1000d0) then
        e = TEV1
    else if ((circe1_params%roots .ge. 900d0) .and. (circe1_params%roots .le. 1100d0))
        write (msgbuf, 2001) circe1_params%roots, 1000d0
        call circem ('MESSAGE', msgbuf)
        e = TEV1
    else if (circe1_params%roots .eq. 1600d0) then

```

```

        e = TEV16
    else if ((circe1_params%roots .ge. 1500d0) .and. (circe1_params%roots .le. 1700d0)
        write (msgbuf, 2001) circe1_params%roots, 1600d0
        call circem ('MESSAGE', msgbuf)
        e = TEV16
    Uses circem 86e.

39a  <Map roots to e 38c>+≡                               (38b 51a 53b) ▷38e
        else
            call circem ('ERROR', &
                'only ROOTS = 350, 500, 800, 1000 and 1600GeV available')
            call circem ('MESSAGE', 'falling back to 500GeV')
            e = GEV500
        endif
    Uses circem 86e.

39b  <Update version 1 derived parameters in circe1 parameters 37d>+≡      (36d) ▷38b 40b▷
        if (xa1lum(e,circe1_params%acc,r) .lt. 0d0) then
            write (msgbuf, 2002) circe1_params%roots, accnam(circe1_params%acc), r
            call circem ('ERROR', msgbuf)
            call circem ('MESSAGE', 'falling back to 500GeV')
            e = GEV500
        end if
    <Log energy mapping 39d>
    Uses circem 86e.

39c  <formats for circes 38d>+≡                               (32a) ▷38d 39e▷
        2002 format ('energy ', F6.1, ' not available for ', A6, ' in revision ', I2)

39d  <Log energy mapping 39d>≡                               (39b 51a 53b 54d 57a 61b 63b 69a)
        if (circe1_params%chat .ge. 2) then
            if (e .ge. GEV090) then
                write (msgbuf, 2003) circe1_params%roots, e
                call circem ('MESSAGE', msgbuf)
            else if (elo .ge. GEV090 .and. ehi .ge. GEV090) then
                write (msgbuf, 2013) circe1_params%roots, elo, ehi
                call circem ('MESSAGE', msgbuf)
            end if
        endif
    Uses circem 86e.

39e  <formats for circes 38d>+≡                               (32a) ▷39c 57b▷
        2003 format ('mapping energy ', F6.1, ' to energy index ', I2)
        2013 format ('mapping energy ', F6.1, ' to energy indices ', I2, ' and ', I2)

The energies 250 GeV, 1.2 TeV and 1.5 TeV were entered late into the game by
the SLAC people. And, of course, 200 GeV and 230 GeV only appeared even
much later

39f  <Local variables for circes 33b>+≡                  (32a) ▷37a 40c▷
        integer, parameter :: EINVAL = -2
        integer, parameter :: GEV090 = -1
        integer, parameter :: GEV170 = 0
        integer, parameter :: GEV350 = 1

```

```

integer, parameter :: GEV500 = 2
integer, parameter :: GEV800 = 3
integer, parameter :: TEV1 = 4
integer, parameter :: TEV16 = 5
integer, parameter :: GEV250 = 6
integer, parameter :: TEV12 = 7
integer, parameter :: TEV15 = 8
integer, parameter :: GEV200 = 9
integer, parameter :: GEV230 = 10
integer, parameter :: A1NEGY = 5
integer, parameter :: A1NREV = 5
integer :: i

40a <8-byte aligned part of circe1 parameters 32d>+≡ (32c) ◄32d 74c►
    real(kind=double) :: lumi
    real(kind=double) :: a1(0:7)

40b <Update version 1 derived parameters in circe1 parameters 37d>+≡ (36d) ◄39b
    circe1_params%lumi = xa1lum (e,circe1_params%acc,r)
    do i = 0, 7
        circe1_params%a1(i) = xa1(i,e,circe1_params%acc,r)
    end do

40c <Local variables for circes 33b>+≡ (32a) ◄39f 51b►
    real(kind=double), dimension(A1NEGY,NACC,0:A1NREV), save :: xa1lum = 0
    real(kind=double), dimension(0:7,A1NEGY,NACC,0:A1NREV), save :: xa1 = 0
Uses NACC 13b.

Revision 1. The mother of all revisions.

40d <Initializations for circes 35b>+≡ (32a) ◄35b 40e►
    xa1lum(GEV500,SBAND,1) = 5.212299E+01
    xa1(0:7,GEV500,SBAND,1) = (/ &
        .39192E+00, .66026E+00, .11828E+02,-.62543E+00, &
        .52292E+00,-.69245E+00, .14983E+02, .65421E+00 /)
    xa1lum(GEV500,TESLA,1) = 6.066178E+01
    xa1(0:7,GEV500,TESLA,1) = (/ &
        .30196E+00, .12249E+01, .21423E+02,-.57848E+00, &
        .68766E+00,-.69788E+00, .23121E+02, .78399E+00 /)
    xa1lum(GEV500,XBAND,1) = 5.884699E+01
    xa1(0:7,GEV500,XBAND,1) = (/ &
        .48594E+00, .52435E+00, .83585E+01,-.61347E+00, &
        .30703E+00,-.68804E+00, .84109E+01, .44312E+00 /)
Uses SBAND 13a, TESLA 13a, and XBAND 13a.

40e <Initializations for circes 35b>+≡ (32a) ◄40d 41a►
    xa1lum(TEV1,SBAND,1) = 1.534650E+02
    xa1(0:7,TEV1,SBAND,1) = (/ &
        .24399E+00, .87464E+00, .66751E+01,-.56808E+00, &
        .59295E+00,-.68921E+00, .94232E+01, .83351E+00 /)
    xa1lum(TEV1,TESLA,1) = 1.253381E+03
    xa1(0:7,TEV1,TESLA,1) = (/ &
        .39843E+00, .70097E+00, .11602E+02,-.61061E+00, &
```

```

    .40737E+00,-.69319E+00, .14800E+02, .51382E+00 /)
xa1lum(TEV1,XBAND,1) = 1.901783E+02
xa1(0:7,TEV1,XBAND,1) = (/ &
    .32211E+00,   .61798E+00,   .28298E+01,  -.54644E+00, &
    .45674E+00,  -.67301E+00,   .41703E+01,   .74536E+00 /)

```

Uses SBAND 13a, TESLA 13a, and XBAND 13a.

Unavailable

41a *<Initializations for circes 35b>+≡* (32a) ◁40e 41b▷
`xa1lum(GEV350,1:NACC,1) = NACC * (-1d0)`
`xa1lum(GEV800,1:NACC,1) = NACC * (-1d0)`

Uses NACC 13b.

Unavailable as well

41b *<Initializations for circes 35b>+≡* (32a) ◁41a 41c▷
`xa1lum(GEV500,SBNDEE:NACC,1) = 4 * (-1d0)`
`xa1lum(TEV1,SBNDEE:NACC,1) = 4 * (-1d0)`

Uses NACC 13b and SBNDEE 13a.

No 1.6TeV parameters in this revision

41c *<Initializations for circes 35b>+≡* (32a) ◁41b 44a▷
`xa1lum(TEV16,1:NACC,1) = 7 * (-1d0)`

Uses NACC 13b.

41d *<Public subroutines 31a>+≡* (30b) ◁35e 41f▷
`public :: circel`

Uses circel 41e.

41e *<Module subroutines 31b>+≡* (30b) ◁35f 41g▷
`subroutine circel (1)`
 `real(kind=double), intent(out) :: l`
 `l = circe1_params%lumi`
`end subroutine circel`

Defines:

`circel`, used in chunks 12a and 41d.

41f *<Public subroutines 31a>+≡* (30b) ◁41d 42b▷
`public :: circee`

Uses circee 41g.

41g *<Module subroutines 31b>+≡* (30b) ◁41e 42c▷
`function circee (x1, x2)`
 `real(kind=double) :: x1, x2`
 `real(kind=double) :: circee`
 `real(kind=double) :: d1, d2`
<Initialization check 32g>
 `circee = -1.0`
 `if ((circe1_params%ver .eq. 1) .or. (circe1_params%ver .eq. 0)) then`
<Calculate version 1 of the e⁺e⁻ distribution 42a>
<else handle invalid versions 37b>
 `end function circee`

Defines:

`circee`, used in chunks 14–16, 31b, 41f, and 42a.
Uses d1 16a and d2 16c.

The first version of the parametrization is factorized

$$D_{p_1 p_2}^{\alpha 1 \rho}(x_1, x_2, s) = d_{p_1}^{\alpha 1 \rho}(x_1) d_{p_2}^{\alpha 1 \rho}(x_2) \quad (15)$$

where the distributions are

$$d_{e^\pm}^{\alpha 1 \rho}(x) = a_0^{\alpha \rho} \delta(1-x) + a_1^{\alpha \rho} x^{a_2^{\alpha \rho}} (1-x)^{a_3^{\alpha \rho}} \quad (16)$$

$$d_\gamma(x) = a_4^{\alpha \rho} x^{a_5^{\alpha \rho}} (1-x)^{a_6^{\alpha \rho}} \quad (17)$$

42a *(Calculate version 1 of the $e^+ e^-$ distribution 42a)≡* (41g)

```

if (x1 .eq. 1d0) then
    d1 = circe1_params%a1(0)
elseif (x1 .lt. 1d0 .and. x1 .gt. 0d0) then
    d1 = circe1_params%a1(1) * x1**circe1_params%a1(2) * (1d0 - x1)**circe1_params%
elseif (x1 .eq. -1d0) then
    d1 = 1d0 - circe1_params%a1(0)
else
    d1 = 0d0
endif
if (x2 .eq. 1d0) then
    d2 = circe1_params%a1(0)
elseif (x2 .lt. 1d0 .and. x2 .gt. 0d0) then
    d2 = circe1_params%a1(1) * x2**circe1_params%a1(2) * (1d0 - x2)**circe1_params%
elseif (x2 .eq. -1d0) then
    d2 = 1d0 - circe1_params%a1(0)
else
    d2 = 0d0
endif
circee = d1 * d2

```

Uses `circee` 41g, d1 16a, and d2 16c.

42b *(Public subroutines 31a)≡* (30b) ▷41f 43b▷

public :: `circeg`

Uses `circeg` 42c.

42c *(Module subroutines 31b)≡* (30b) ▷41g 43c▷

```

function circeg (x1, x2)
    real(kind=double) :: x1, x2
    real(kind=double) :: circeg
    real(kind=double) :: d1, d2
(Initialization check 32g)
    circeg = -1.0
    if ((circe1_params%ver .eq. 1) .or. (circe1_params%ver .eq. 0)) then
(Calculate version 1 of the  $e^\pm \gamma$  distribution 43a)
(else handle invalid versions 37b)
    end function circeg

```

Defines:

`circeg`, used in chunks 14, 31b, 42b, and 43a.
Uses d1 16a and d2 16c.

43a *(Calculate version 1 of the $e^\pm\gamma$ distribution 43a)* \equiv (42c)

```

if (x1 .eq. 1d0) then
    d1 = circe1_params%a1(0)
else if (x1 .lt. 1d0 .and. x1 .gt. 0d0) then
    d1 = circe1_params%a1(1) * x1**circe1_params%a1(2) * (1d0 - x1)**circe1_params%a1
else if (x1 .eq. -1d0) then
    d1 = 1d0 - circe1_params%a1(0)
else
    d1 = 0d0
end if
if (x2 .lt. 1d0 .and. x2 .gt. 0d0) then
    d2 = circe1_params%a1(4) * x2**circe1_params%a1(5) * (1d0 - x2)**circe1_params%a1
else if (x2 .eq. -1d0) then
    d2 = circe1_params%a1(7)
else
    d2 = 0d0
end if
circeg = d1 * d2

```

Uses circeg 42c, d1 16a, and d2 16c.

43b *(Public subroutines 31a)* \equiv (30b) \triangleleft 42b 73a \triangleright

```

public :: circgg

```

Uses circgg 43c.

43c *(Module subroutines 31b)* \equiv (30b) \triangleleft 42c 71e \triangleright

```

function circgg (x1, x2)
    real(kind=double) :: x1, x2
    real(kind=double) :: circgg
    real(kind=double) :: d1, d2
(Initialization check 32g)
    circgg = -1.0
    if ((circe1_params%ver .eq. 1) .or. (circe1_params%ver .eq. 0)) then
(Calculate version 1 of the  $\gamma\gamma$  distribution 43d)
(else handle invalid versions 37b)
    end function circgg

```

Defines:
circgg, used in chunks 14, 31b, 43, and 81a.
Uses d1 16a and d2 16c.

43d *(Calculate version 1 of the $\gamma\gamma$ distribution 43d)* \equiv (43c)

```

if (x1 .lt. 1d0 .and. x1 .gt. 0d0) then
    d1 = circe1_params%a1(4) * x1**circe1_params%a1(5) * (1d0 - x1)**circe1_params%
elseif (x1 .eq. -1d0) then
    d1 = circe1_params%a1(7)
else
    d1 = 0d0
endif
if (x2 .lt. 1d0 .and. x2 .gt. 0d0) then
    d2 = circe1_params%a1(4) * x2**circe1_params%a1(5) * (1d0 - x2)**circe1_params%
elseif (x2 .eq. -1d0) then
    d2 = circe1_params%a1(7)

```

```

    else
        d2 = 0d0
    endif
    circgg = d1 * d2

```

Uses circgg 43c, d1 16a, and d2 16c.

Revision 2. New Tesla parameters, including 350 GeV and 800 GeV.

44a *<Initializations for circes 35b>+≡* (32a) ▷ 41c 44b▷

```

xa1lum(GEV500,SBAND,2) = .31057E+02
xa1(0:7,GEV500,SBAND,2) = (/ &
    .38504E+00, .79723E+00, .14191E+02,-.60456E+00, &
    .53411E+00,-.68873E+00, .15105E+02, .65151E+00 /)
xa1lum(TEV1,SBAND,2) = .24297E+03
xa1(0:7,TEV1,SBAND,2) = (/ &
    .24374E+00, .89466E+00, .70242E+01,-.56754E+00, &
    .60910E+00,-.68682E+00, .96083E+01, .83985E+00 /)
xa1lum(GEV350,TESLA,2) = .73369E+02
xa1(0:7,GEV350,TESLA,2) = (/ &
    .36083E+00, .12819E+01, .37880E+02,-.59492E+00, &
    .69109E+00,-.69379E+00, .40061E+02, .65036E+00 /)
xa1lum(GEV500,TESLA,2) = .10493E+03
xa1(0:7,GEV500,TESLA,2) = (/ &
    .29569E+00, .11854E+01, .21282E+02,-.58553E+00, &
    .71341E+00,-.69279E+00, .24061E+02, .77709E+00 /)
xa1lum(GEV800,TESLA,2) = .28010E+03
xa1(0:7,GEV800,TESLA,2) = (/ &
    .22745E+00, .11265E+01, .10483E+02,-.55711E+00, &
    .69579E+00,-.69068E+00, .13093E+02, .89605E+00 /)
xa1lum(TEV1,TESLA,2) = .10992E+03
xa1(0:7,TEV1,TESLA,2) = (/ &
    .40969E+00, .66105E+00, .11972E+02,-.62041E+00, &
    .40463E+00,-.69354E+00, .14669E+02, .51281E+00 /)
xa1lum(GEV500,XBAND,2) = .35689E+02
xa1(0:7,GEV500,XBAND,2) = (/ &
    .48960E+00, .46815E+00, .75249E+01,-.62769E+00, &
    .30341E+00,-.68754E+00, .85545E+01, .43453E+00 /)
xa1lum(TEV1,XBAND,2) = .11724E+03
xa1(0:7,TEV1,XBAND,2) = (/ &
    .31939E+00, .62415E+00, .30763E+01,-.55314E+00, &
    .45634E+00,-.67089E+00, .41529E+01, .73807E+00 /)

```

Uses SBAND 13a, TESLA 13a, and XBAND 13a.

Unavailable

44b *<Initializations for circes 35b>+≡* (32a) ▷ 44a 44c▷

```

xa1lum(GEV350,SBAND,2) = -1d0
xa1lum(GEV350,XBAND,2) = -1d0
xa1lum(GEV800,SBAND,2) = -1d0
xa1lum(GEV800,XBAND,2) = -1d0

```

Uses SBAND 13a and XBAND 13a.

Unavailable as well

44c *<Initializations for circes 35b>+≡* (32a) ▷ 44b 45a▷

```

xa1lum(GEV350,SBNDEE:NACC,2) = 4 * (-1d0)
xa1lum(GEV500,SBNDEE:NACC,2) = 4 * (-1d0)
xa1lum(GEV800,SBNDEE:NACC,2) = 4 * (-1d0)
xa1lum(TEV1,SBNDEE:NACC,2) = 4 * (-1d0)

```

Uses NACC 13b and SBNDEE 13a.

No 1.6TeV parameters in this revision

45a *<Initializations for circes 35b>+≡* (32a) ◁44c 45b▷
 xa1lum(TEV16,1:**NACC**,2) = 7 * (-1d0)

Uses NACC 13b.

Revision 3. Features:

- improved error estimates.
- cleaner fitting procedure, including delta function pieces.

45b *<Initializations for circes 35b>+≡* (32a) ◁45a 46a▷
 xa1lum(GEV500,**SBAND**,3) = .31469E+02
 xa1(0:7,GEV500,**SBAND**,3) = (/ &
 .38299E+00, .72035E+00, .12618E+02, -.61611E+00, &
 .51971E+00, -.68960E+00, .15066E+02, .63784E+00 /)
 xa1lum(TEV1,**SBAND**,3) = .24566E+03
 xa1(0:7,TEV1,**SBAND**,3) = (/ &
 .24013E+00, .95763E+00, .69085E+01, -.55151E+00, &
 .59497E+00, -.68622E+00, .94494E+01, .82158E+00 /)
 xa1lum(GEV350,**TESLA**,3) = .74700E+02
 xa1(0:7,GEV350,**TESLA**,3) = (/ &
 .34689E+00, .12484E+01, .33720E+02, -.59523E+00, &
 .66266E+00, -.69524E+00, .38488E+02, .63775E+00 /)
 xa1lum(GEV500,**TESLA**,3) = .10608E+03
 xa1(0:7,GEV500,**TESLA**,3) = (/ &
 .28282E+00, .11700E+01, .19258E+02, -.58390E+00, &
 .68777E+00, -.69402E+00, .23638E+02, .75929E+00 /)
 xa1lum(GEV800,**TESLA**,3) = .28911E+03
 xa1(0:7,GEV800,**TESLA**,3) = (/ &
 .21018E+00, .12039E+01, .96763E+01, -.54024E+00, &
 .67220E+00, -.69083E+00, .12733E+02, .87355E+00 /)
 xa1lum(TEV1,**TESLA**,3) = .10936E+03
 xa1(0:7,TEV1,**TESLA**,3) = (/ &
 .41040E+00, .68099E+00, .11610E+02, -.61237E+00, &
 .40155E+00, -.69073E+00, .14698E+02, .49989E+00 /)
 xa1lum(GEV500,**XBAND**,3) = .36145E+02
 xa1(0:7,GEV500,**XBAND**,3) = (/ &
 .51285E+00, .45812E+00, .75135E+01, -.62247E+00, &
 .30444E+00, -.68530E+00, .85519E+01, .43062E+00 /)
 xa1lum(TEV1,**XBAND**,3) = .11799E+03
 xa1(0:7,TEV1,**XBAND**,3) = (/ &
 .31241E+00, .61241E+00, .29938E+01, -.55848E+00, &
 .44801E+00, -.67116E+00, .41119E+01, .72753E+00 /)

Uses SBAND 13a, TESLA 13a, and XBAND 13a.

Still unavailable

46a *(Initializations for circes 35b)*+≡ (32a) ◄45b 46b►

```
xa1lum(GEV350,SBAND,3) = -1d0
xa1lum(GEV350,XBAND,3) = -1d0
xa1lum(GEV800,SBAND,3) = -1d0
xa1lum(GEV800,XBAND,3) = -1d0
```

Uses SBAND 13a and XBAND 13a.

Unavailable as well

46b *(Initializations for circes 35b)*+≡ (32a) ◄46a 46c►

```
xa1lum(GEV350,SBNDEE:NACC,3) = 4 * (-1d0)
xa1lum(GEV500,SBNDEE:NACC,3) = 4 * (-1d0)
xa1lum(GEV800,SBNDEE:NACC,3) = 4 * (-1d0)
xa1lum(TEV1,SBNDEE:NACC,3) = 4 * (-1d0)
```

Uses NACC 13b and SBNDEE 13a.

No 1.6TeV parameters in this revision

46c *(Initializations for circes 35b)*+≡ (32a) ◄46b 46d►

```
xa1lum(TEV16,1:NACC,3) = 7 * (-1d0)
```

Uses NACC 13b.

Revision 4. Features:

- a bug in Guinea-Pig's synchrotron radiation spectrum has been fixed.

46d *(Initializations for circes 35b)*+≡ (32a) ◄46c 47a►

```
xa1lum(GEV500,SBAND,4) = .31528E+02
xa1(0:7,GEV500,SBAND,4) = (/ &
    .38169E+00, .73949E+00, .12543E+02,-.61112E+00, &
    .51256E+00,-.69009E+00, .14892E+02, .63314E+00 /)
xa1lum(TEV1,SBAND,4) = .24613E+03
xa1(0:7,TEV1,SBAND,4) = (/ &
    .24256E+00, .94117E+00, .66775E+01,-.55160E+00, &
    .57484E+00,-.68891E+00, .92271E+01, .81162E+00 /)
xa1lum(GEV350,TESLA,4) = .74549E+02
xa1(0:7,GEV350,TESLA,4) = (/ &
    .34120E+00, .12230E+01, .32932E+02,-.59850E+00, &
    .65947E+00,-.69574E+00, .38116E+02, .63879E+00 /)
xa1lum(GEV500,TESLA,4) = .10668E+03
xa1(0:7,GEV500,TESLA,4) = (/ &
    .28082E+00, .11074E+01, .18399E+02,-.59118E+00, &
    .68880E+00,-.69375E+00, .23463E+02, .76073E+00 /)
xa1lum(GEV800,TESLA,4) = .29006E+03
xa1(0:7,GEV800,TESLA,4) = (/ &
    .21272E+00, .11443E+01, .92564E+01,-.54657E+00, &
    .66799E+00,-.69137E+00, .12498E+02, .87571E+00 /)
xa1lum(TEV1,TESLA,4) = .11009E+03
xa1(0:7,TEV1,TESLA,4) = (/ &
    .41058E+00, .64745E+00, .11271E+02,-.61996E+00, &
    .39801E+00,-.69150E+00, .14560E+02, .49924E+00 /)
xa1lum(GEV500,XBAND,4) = .36179E+02
xa1(0:7,GEV500,XBAND,4) = (/ &
```

```

    .51155E+00, .43313E+00, .70446E+01,-.63003E+00, &
    .29449E+00,-.68747E+00, .83489E+01, .42458E+00 /)
xa1lum(TEV1,XBAND,4) = .11748E+03
xa1(0:7,TEV1,XBAND,4) = (/ &
    .32917E+00, .54322E+00, .28493E+01,-.57959E+00, &
    .39266E+00,-.68217E+00, .38475E+01, .68478E+00 /)

```

Uses **SBAND 13a**, **TESLA 13a**, and **XBAND 13a**.

Still unavailable

47a *<Initializations for circes 35b>+≡* (32a) ◁46d 47b▷
 xa1lum(GEV350,**SBAND**,4) = -1d0
 xa1lum(GEV350,**XBAND**,4) = -1d0
 xa1lum(GEV800,**SBAND**,4) = -1d0
 xa1lum(GEV800,**XBAND**,4) = -1d0

Uses **SBAND 13a** and **XBAND 13a**.

Unavailable as well

47b *<Initializations for circes 35b>+≡* (32a) ◁47a 47c▷
 xa1lum(GEV350,**SBNDEE:NACC**,4) = 4 * (-1d0)
 xa1lum(GEV500,**SBNDEE:NACC**,4) = 4 * (-1d0)
 xa1lum(GEV800,**SBNDEE:NACC**,4) = 4 * (-1d0)
 xa1lum(TEV1,**SBNDEE:NACC**,4) = 4 * (-1d0)

Uses **NACC 13b** and **SBNDEE 13a**.

No 1.6TeV parameters in this revision

47c *<Initializations for circes 35b>+≡* (32a) ◁47b 47d▷
 xa1lum(TEV16,1:**NACC**,4) = 7 * (-1d0)

Uses **NACC 13b**.

Revision 5. Features:

- a bug in **Guinea-Pig** has been fixed.
- updated parameter sets

47d *<Initializations for circes 35b>+≡* (32a) ◁47c 48▷
 xa1lum(GEV350,**SBAND**,5) = 0.21897E+02
 xa1(0:7,GEV350,**SBAND**,5) = (/ &
 0.57183E+00, 0.53877E+00, 0.19422E+02,-0.63064E+00, &
 0.49112E+00,-0.69109E+00, 0.24331E+02, 0.52718E+00 /)
 xa1lum(GEV500,**SBAND**,5) = 0.31383E+02
 xa1(0:7,GEV500,**SBAND**,5) = (/ &
 0.51882E+00, 0.49915E+00, 0.11153E+02,-0.63017E+00, &
 0.50217E+00,-0.69113E+00, 0.14935E+02, 0.62373E+00 /)
 xa1lum(GEV800,**SBAND**,5) = 0.95091E+02
 xa1(0:7,GEV800,**SBAND**,5) = (/ &
 0.47137E+00, 0.46150E+00, 0.56562E+01,-0.61758E+00, &
 0.46863E+00,-0.68897E+00, 0.85876E+01, 0.67577E+00 /)
 xa1lum(TEV1,**SBAND**,5) = 0.11900E+03
 xa1(0:7,TEV1,**SBAND**,5) = (/ &
 0.43956E+00, 0.45471E+00, 0.42170E+01,-0.61180E+00, &
 0.48711E+00,-0.68696E+00, 0.67145E+01, 0.74551E+00 /)
 xa1lum(TEV16,**SBAND**,5) = 0.11900E+03

```

xa1(0:7,TEV16,SBAND,5) = (/ &
  0.43956E+00, 0.45471E+00, 0.42170E+01,-0.61180E+00, &
  0.48711E+00,-0.68696E+00, 0.67145E+01, 0.74551E+00 /)
xa1lum(GEV350,TESLA,5) = 0.97452E+02
xa1(0:7,GEV350,TESLA,5) = (/ &
  0.39071E+00, 0.84996E+00, 0.17614E+02,-0.60609E+00, &
  0.73920E+00,-0.69490E+00, 0.28940E+02, 0.77286E+00 /)
xa1lum(GEV500,TESLA,5) = 0.10625E+03
xa1(0:7,GEV500,TESLA,5) = (/ &
  0.42770E+00, 0.71457E+00, 0.15284E+02,-0.61664E+00, &
  0.68166E+00,-0.69208E+00, 0.24165E+02, 0.73806E+00 /)
xa1lum(GEV800,TESLA,5) = 0.17086E+03
xa1(0:7,GEV800,TESLA,5) = (/ &
  0.36025E+00, 0.69118E+00, 0.76221E+01,-0.59440E+00, &
  0.71269E+00,-0.69077E+00, 0.13117E+02, 0.91780E+00 /)
xa1lum(TEV1,TESLA,5) = 0.21433E+03
xa1(0:7,TEV1,TESLA,5) = (/ &
  0.33145E+00, 0.67075E+00, 0.55438E+01,-0.58468E+00, &
  0.72503E+00,-0.69084E+00, 0.99992E+01, 0.10112E+01 /)
xa1lum(TEV16,TESLA,5) = 0.34086E+03
xa1(0:7,TEV16,TESLA,5) = (/ &
  0.49058E+00, 0.42609E+00, 0.50550E+01,-0.61867E+00, &
  0.39225E+00,-0.68916E+00, 0.75514E+01, 0.58754E+00 /)
xa1lum(GEV350,XBAND,5) = 0.31901E+02
xa1(0:7,GEV350,XBAND,5) = (/ &
  0.65349E+00, 0.31752E+00, 0.94342E+01,-0.64291E+00, &
  0.30364E+00,-0.68989E+00, 0.11446E+02, 0.40486E+00 /)
xa1lum(GEV500,XBAND,5) = 0.36386E+02
xa1(0:7,GEV500,XBAND,5) = (/ &
  0.65132E+00, 0.28728E+00, 0.69853E+01,-0.64440E+00, &
  0.28736E+00,-0.68758E+00, 0.83227E+01, 0.41492E+00 /)
xa1lum(GEV800,XBAND,5) = 0.10854E+03
xa1(0:7,GEV800,XBAND,5) = (/ &
  0.49478E+00, 0.36221E+00, 0.30116E+01,-0.61548E+00, &
  0.39890E+00,-0.68418E+00, 0.45183E+01, 0.67243E+00 /)
xa1lum(TEV1,XBAND,5) = 0.11899E+03
xa1(0:7,TEV1,XBAND,5) = (/ &
  0.49992E+00, 0.34299E+00, 0.26184E+01,-0.61584E+00, &
  0.38450E+00,-0.68342E+00, 0.38589E+01, 0.67408E+00 /)
xa1lum(TEV16,XBAND,5) = 0.13675E+03
xa1(0:7,TEV16,XBAND,5) = (/ &
  0.50580E+00, 0.30760E+00, 0.18339E+01,-0.61421E+00, &
  0.35233E+00,-0.68315E+00, 0.26708E+01, 0.67918E+00 /)

```

Uses **SBAND 13a**, **TESLA 13a**, and **XBAND 13a**.

Revision 0. Features:

- e^-e^- mode

48 *⟨Initializations for circes 35b⟩+≡* (32a) ◃ 47d 49a ▷
 xa1lum(GEV500,**SBNDEE**,0) = .92914E+01

```

xa1(0:7,GEV500,SBNDEE,0) = (/ &
    .34866E+00, .78710E+00, .10304E+02,-.59464E+00, &
    .40234E+00,-.69741E+00, .20645E+02, .47274E+00 /)
xa1lum(TEV1,SBNDEE,0) = .45586E+02
xa1(0:7,TEV1,SBNDEE,0) = (/ &
    .21084E+00, .99168E+00, .54407E+01,-.52851E+00, &
    .47493E+00,-.69595E+00, .12480E+02, .64027E+00 /)
xa1lum(GEV350,TESLEE,0) = .15175E+02
xa1(0:7,GEV350,TESLEE,0) = (/ &
    .33093E+00, .11137E+01, .25275E+02,-.59942E+00, &
    .49623E+00,-.70403E+00, .60188E+02, .44637E+00 /)
xa1lum(GEV500,TESLEE,0) = .21622E+02
xa1(0:7,GEV500,TESLEE,0) = (/ &
    .27175E+00, .10697E+01, .14858E+02,-.58418E+00, &
    .50824E+00,-.70387E+00, .36129E+02, .53002E+00 /)
xa1lum(GEV800,TESLEE,0) = .43979E+02
xa1(0:7,GEV800,TESLEE,0) = (/ &
    .22994E+00, .10129E+01, .81905E+01,-.55751E+00, &
    .46551E+00,-.70461E+00, .19394E+02, .58387E+00 /)
xa1lum(TEV1,TESLEE,0) = .25465E+02
xa1(0:7,TEV1,TESLEE,0) = (/ &
    .37294E+00, .67522E+00, .87504E+01,-.60576E+00, &
    .35095E+00,-.69821E+00, .18526E+02, .42784E+00 /)
xa1lum(GEV500,XBNDEE,0) = .13970E+02
xa1(0:7,GEV500,XBNDEE,0) = (/ &
    .47296E+00, .46800E+00, .58897E+01,-.61689E+00, &
    .27181E+00,-.68923E+00, .10087E+02, .37462E+00 /)
xa1lum(TEV1,XBNDEE,0) = .41056E+02
xa1(0:7,TEV1,XBNDEE,0) = (/ &
    .27965E+00, .74816E+00, .27415E+01,-.50491E+00, &
    .38320E+00,-.67945E+00, .47506E+01, .62218E+00 /)

```

Uses **SBNDEE** 13a, **TESLEE** 13a, and **XBNDEE** 13a.

Still unavailable

49a *(Initializations for circes 35b)*+≡ (32a) ▷48 49b▷
 xa1lum(GEV350,**SBNDEE**,0) = -1d0
 xa1lum(GEV350,**XBNDEE**,0) = -1d0
 xa1lum(GEV800,**SBNDEE**,0) = -1d0
 xa1lum(GEV800,**XBNDEE**,0) = -1d0

Uses **SBNDEE** 13a and **XBNDEE** 13a.

49b *(Initializations for circes 35b)*+≡ (32a) ▷49a 50a▷
 xa1lum(GEV500,**SBAND**,0) = .31528E+02
 xa1(0:7,GEV500,**SBAND**,0) = (/ &
 .38169E+00, .73949E+00, .12543E+02,-.61112E+00, &
 .51256E+00,-.69009E+00, .14892E+02, .63314E+00 /)
 xa1lum(TEV1,**SBAND**,0) = .24613E+03
 xa1(0:7,TEV1,**SBAND**,0) = (/ &
 .24256E+00, .94117E+00, .66775E+01,-.55160E+00, &
 .57484E+00,-.68891E+00, .92271E+01, .81162E+00 /)
 xa1lum(GEV350,**TESLA**,0) = .74549E+02

```

xa1(0:7,GEV350,TESLA,0) = (/ &
  .34120E+00, .12230E+01, .32932E+02,-.59850E+00, &
  .65947E+00,-.69574E+00, .38116E+02, .63879E+00 /)
xa1lum(GEV500,TESLA,0) = .10668E+03
xa1(0:7,GEV500,TESLA,0) = (/ &
  .28082E+00, .11074E+01, .18399E+02,-.59118E+00, &
  .68880E+00,-.69375E+00, .23463E+02, .76073E+00 /)
xa1lum(GEV800,TESLA,0) = .29006E+03
xa1(0:7,GEV800,TESLA,0) = (/ &
  .21272E+00, .11443E+01, .92564E+01,-.54657E+00, &
  .66799E+00,-.69137E+00, .12498E+02, .87571E+00 /)
xa1lum(TEV1,TESLA,0) = .11009E+03
xa1(0:7,TEV1,TESLA,0) = (/ &
  .41058E+00, .64745E+00, .11271E+02,-.61996E+00, &
  .39801E+00,-.69150E+00, .14560E+02, .49924E+00 /)
xa1lum(GEV500,XBAND,0) = .36179E+02
xa1(0:7,GEV500,XBAND,0) = (/ &
  .51155E+00, .43313E+00, .70446E+01,-.63003E+00, &
  .29449E+00,-.68747E+00, .83489E+01, .42458E+00 /)
xa1lum(TEV1,XBAND,0) = .11748E+03
xa1(0:7,TEV1,XBAND,0) = (/ &
  .32917E+00, .54322E+00, .28493E+01,-.57959E+00, &
  .39266E+00,-.68217E+00, .38475E+01, .68478E+00 /)

```

Uses **SBAND 13a**, **TESLA 13a**, and **XBAND 13a**.

Still unavailable

50a *(Initializations for circes 35b)* \equiv (32a) \triangleleft 49b 51e \triangleright

```

xa1lum(GEV350,SBAND,0) = -1d0
xa1lum(GEV350,XBAND,0) = -1d0
xa1lum(GEV800,SBAND,0) = -1d0
xa1lum(GEV800,XBAND,0) = -1d0

```

Uses **SBAND 13a** and **XBAND 13a**.

6.2.2 Version 2

50b *(Version 2 has been retired 50b)* \equiv (37b)

```

call circem ('PANIC', '*****')
call circem ('PANIC', '* version 2 has been retired, *')
call circem ('PANIC', '* please use version 1 instead! *')
call circem ('PANIC', '*****')
return

```

Uses **circem 86e**.

6.2.3 Versions 3 and 4

50c *(Update version 3 and 4 derived parameters in circe1 parameters 50c)* \equiv (36d) 51a \triangleright

```

if (circe1_params%rev .eq. 0) then
  r = 0
elseif (circe1_params%rev .ge. 19970417) then
  r = 5

```

```

        if (ver34 .eq. 3) then
            call circem ('WARNING', 'version 3 retired after 97/04/17')
            call circem ('MESSAGE', 'falling back to version 4')
        end if
        else if (circe1_params%rev .ge. 19961022) then
            r = ver34
            if ((circe1_params%roots .ne. 800d0) .or. (circe1_params%acc .ne. TESLA)) then
                call circem ('ERROR', 'versions 3 and 4 before 97/04/17')
                call circem ('ERROR', 'apply to TESLA at 800 GeV only')
                call circem ('MESSAGE', 'falling back to TESLA at 800GeV')
                circe1_params%acc = TESLA
                e = GEV800
            end if
            else if (circe1_params%rev .lt. 19961022) then
                call circem ('ERROR', &
                    'no revision of versions 3 and 4 available before 96/10/22')
                call circem ('MESSAGE', 'falling back to default')
                r = 5
            end if
        <Log revision mapping 38a>
    
```

Uses **circem** 86e and **TESLA** 13a.

51a <Update version 3 and 4 derived parameters in circe1 parameters 50c>+≡ (36d) ▷50c 51c▷
 <Map roots to e 38c>

```

        if (xa3lum(e,circe1_params%acc,r) .lt. 0d0) then
            write (msgbuf, 2002) circe1_params%roots, accnam(circe1_params%acc), r
            call circem ('ERROR', msgbuf)
            call circem ('MESSAGE', 'falling back to 500GeV')
            e = GEV500
        endif
    
```

<Log energy mapping 39d>

Uses **circem** 86e.

51b <Local variables for circes 33b>+≡ (32a) ▷40c 51d▷
 integer, parameter :: A3NEY = 5, A3NREV = 5

51c <Update version 3 and 4 derived parameters in circe1 parameters 50c>+≡ (36d) ▷51a

```

        circe1_params%lumi = xa3lum (e,circe1_params%acc,r)
        do i = 0, 7
            circe1_params%a1(i) = xa3(i,e,circe1_params%acc,r)
        end do
    
```

51d <Local variables for circes 33b>+≡ (32a) ▷51b 53c▷
 real, dimension(A3NEY,**NACC**,0:A3NREV), save :: xa3lum = -1
 real, dimension(0:7,A3NEY,**NACC**,0:A3NREV), save :: xa3 = 0

Uses **NACC** 13b.

Revisions 3 & 4. The mother of all revisions.

51e <Initializations for circes 35b>+≡ (32a) ▷50a 52a▷

```

        xa3lum(GEV800,TESLA,3) = .17196E+03
        xa3(0:7,GEV800,TESLA,3) = (/ &
            .21633E+00, .11333E+01, .95928E+01, -.55095E+00, &
    
```

```

    .73044E+00,-.69101E+00, .12868E+02, .94737E+00 /)
xa3lum(GEV800,TESLA, 4) = .16408E+03
xa3(0:7,GEV800,TESLA, 4) = (/ &
    .41828E+00, .72418E+00, .14137E+02,-.61189E+00, &
    .36697E+00,-.69205E+00, .17713E+02, .43583E+00 /)

```

Uses **TESLA 13a**.

Revision 5.

52a *(Initializations for circles 35b)*+≡ (32a) ▷51e 52b▷

```

xa3lum(GEV350,TESLA,5) = 0.66447E+02
xa3(0:7,GEV350,TESLA,5) = (/ &
    0.69418E+00, 0.50553E+00, 0.48430E+02,-0.63911E+00, &
    0.34074E+00,-0.69533E+00, 0.55502E+02, 0.29397E+00 /)
xa3lum(GEV500,TESLA,5) = 0.95241E+02
xa3(0:7,GEV500,TESLA,5) = (/ &
    0.64882E+00, 0.45462E+00, 0.27103E+02,-0.64535E+00, &
    0.35101E+00,-0.69467E+00, 0.33658E+02, 0.35024E+00 /)
xa3lum(GEV800,TESLA,5) = 0.16974E+03
xa3(0:7,GEV800,TESLA,5) = (/ &
    0.58706E+00, 0.43771E+00, 0.13422E+02,-0.63804E+00, &
    0.35541E+00,-0.69467E+00, 0.17528E+02, 0.43051E+00 /)
xa3lum(TEV1,TESLA,5) = 0.21222E+03
xa3(0:7,TEV1,TESLA,5) = (/ &
    0.55525E+00, 0.42577E+00, 0.96341E+01,-0.63587E+00, &
    0.36448E+00,-0.69365E+00, 0.13161E+02, 0.47715E+00 /)
xa3lum(TEV16,TESLA,5) = 0.34086E+03
xa3(0:7,TEV16,TESLA,5) = (/ &
    0.49058E+00, 0.42609E+00, 0.50550E+01,-0.61867E+00, &
    0.39225E+00,-0.68916E+00, 0.75514E+01, 0.58754E+00 /)

```

Uses **TESLA 13a**.

Revision 0. Currently identical to revision 5.

52b *(Initializations for circles 35b)*+≡ (32a) ▷52a 54a▷

```

xa3lum(GEV350,TESLA,0) = 0.66447E+02
xa3(0:7,GEV350,TESLA,0) = (/ &
    0.69418E+00, 0.50553E+00, 0.48430E+02,-0.63911E+00, &
    0.34074E+00,-0.69533E+00, 0.55502E+02, 0.29397E+00 /)
xa3lum(GEV500,TESLA,0) = 0.95241E+02
xa3(0:7,GEV500,TESLA,0) = (/ &
    0.64882E+00, 0.45462E+00, 0.27103E+02,-0.64535E+00, &
    0.35101E+00,-0.69467E+00, 0.33658E+02, 0.35024E+00 /)
xa3lum(GEV800,TESLA,0) = 0.16974E+03
xa3(0:7,GEV800,TESLA,0) = (/ &
    0.58706E+00, 0.43771E+00, 0.13422E+02,-0.63804E+00, &
    0.35541E+00,-0.69467E+00, 0.17528E+02, 0.43051E+00 /)
xa3lum(TEV1,TESLA,0) = 0.21222E+03
xa3(0:7,TEV1,TESLA,0) = (/ &
    0.55525E+00, 0.42577E+00, 0.96341E+01,-0.63587E+00, &
    0.36448E+00,-0.69365E+00, 0.13161E+02, 0.47715E+00 /)
xa3lum(TEV16,TESLA,0) = 0.34086E+03
xa3(0:7,TEV16,TESLA,0) = (/ &

```

```
0.49058E+00, 0.42609E+00, 0.50550E+01,-0.61867E+00, &
0.39225E+00,-0.68916E+00, 0.75514E+01, 0.58754E+00 /)
```

Uses TESLA 13a.

6.2.4 Version 5

```
53a  ⟨Update version 5 derived parameters in circe1 parameters 53a⟩≡      (36d)  53b▷
      if (circe1_params%rev .eq. 0) then
          r = 0
      elseif (circe1_params%rev .ge. 19980505) then
          r = 1
      elseif (circe1_params%rev .lt. 19980505) then
          call circem ('ERROR', &
              'no revision of version 5 available before 98/05/05')
          call circem ('MESSAGE', 'falling back to default')
          r = 1
      endif
      ⟨Log revision mapping 38a⟩
Uses circem 86e.

53b  ⟨Update version 5 derived parameters in circe1 parameters 53a⟩+≡      (36d) ▷53a  53d▷
      if (circe1_params%acc .ne. TESLA) then
          call circem ('ERROR', 'versions 5 applies to TESLA only')
          circe1_params%acc = TESLA
      end if
      ⟨Map roots to e 38c⟩
      if (xa5lum(e,circe1_params%acc,r) .lt. 0d0) then
          write (msgbuf, 2002) circe1_params%roots, accnam(circe1_params%acc), r
          call circem ('ERROR', msgbuf)
          call circem ('MESSAGE', 'falling back to 500GeV')
          e = GEV500
      endif
      ⟨Log energy mapping 39d⟩
Uses circem 86e and TESLA 13a.

53c  ⟨Local variables for circes 33b⟩+≡                                     (32a) ▷51d  53e▷
      integer, parameter :: A5NEGY = 5, A5NREV = 1

53d  ⟨Update version 5 derived parameters in circe1 parameters 53a⟩+≡      (36d) ▷53b▷
      circe1_params%lumi = xa5lum (e,circe1_params%acc,r)
      do i = 0, 7
          circe1_params%a1(i) = xa5(i,e,circe1_params%acc,r)
      end do

53e  ⟨Local variables for circes 33b⟩+≡                                     (32a) ▷53c  55b▷
      real, dimension(A5NEGY,NACC,0:A5NREV), save :: xa5lum
      real, dimension(0:7,A5NEGY,NACC,0:A5NREV), save :: xa5
Uses NACC 13b.
```

Revision 1. The mother of all revisions. Note that $3.3980 \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1} = 2.4099 \cdot 10^{34} \text{ m}^{-2} \cdot 2820.5 \text{ s}^{-1}$ and $3.5936 \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1} = 2.6619 \cdot 10^{34} \text{ m}^{-2} \cdot 4500 \cdot 3 \text{ s}^{-1}$. This unit conversion is missing in *all* earlier versions, unfortunately.

54a *(Initializations for circes 35b)*+≡ (32a) ◁52b 54b▷

```

xa5lum(GEV350, TESLA,1) = -1.0
xa5lum(GEV500, TESLA,1) = 0.33980E+03
xa5(0:7,GEV500, TESLA,1) = (/ &
  0.49808E+00, 0.54613E+00, 0.12287E+02,-0.62756E+00, &
  0.42817E+00,-0.69120E+00, 0.17067E+02, 0.51143E+00 /)
xa5lum(GEV800, TESLA,1) = 0.35936E+03
xa5(0:7,GEV800, TESLA,1) = (/ &
  0.58751E+00, 0.43128E+00, 0.13324E+02,-0.64006E+00, &
  0.30682E+00,-0.69235E+00, 0.16815E+02, 0.37078E+00 /)
xa5lum(TEV1, TESLA,1) = -1.0
xa5lum(TEV16, TESLA,1) = -1.0

```

Uses TESLA 13a.

Revision 0. Currently identical to revision 1.

54b *(Initializations for circes 35b)*+≡ (32a) ◁54a 56b▷

```

xa5lum(GEV350, TESLA,0) = -1.0
xa5lum(GEV500, TESLA,0) = 0.33980E+03
xa5(0:7,GEV500, TESLA,0) = (/ &
  0.49808E+00, 0.54613E+00, 0.12287E+02,-0.62756E+00, &
  0.42817E+00,-0.69120E+00, 0.17067E+02, 0.51143E+00 /)
xa5lum(GEV800, TESLA,0) = 0.35936E+03
xa5(0:7,GEV800, TESLA,0) = (/ &
  0.58751E+00, 0.43128E+00, 0.13324E+02,-0.64006E+00, &
  0.30682E+00,-0.69235E+00, 0.16815E+02, 0.37078E+00 /)
xa5lum(TEV1, TESLA,0) = -1.0
xa5lum(TEV16, TESLA,0) = -1.0

```

Uses TESLA 13a.

6.2.5 Version 6

54c *(Update version 6 derived parameters in circe1 parameters 54c)*+≡ (36d) 54d▷

```

if (circe1_params%rev .eq. 0) then
  r = 0
else if (circe1_params%rev .ge. 19990415) then
  r = 1
else if (circe1_params%rev .lt. 19990415) then
  call circem ('ERROR', &
    'no revision of version 6 available before 1999/04/15')
  call circem ('MESSAGE', 'falling back to default')
  r = 1
end if

```

(Log revision mapping 38a)

Uses circem 86e.

54d *(Update version 6 derived parameters in circe1 parameters 54c)*+≡ (36d) ◁54c 55c▷

```

if (circe1_params%acc .ne. TESLA) then

```

```

    call circem ('ERROR', 'versions 6 applies to TESLA only')
    circe1_params%acc = TESLA
end if
⟨Map roots to e at low energies 55a⟩
if (xa6lum(e,circe1_params%acc,r) .lt. 0d0) then
    write (msgbuf, 2002) circe1_params%roots, accnam(circe1_params%acc), r
    call circem ('ERROR', msgbuf)
    call circem ('MESSAGE', 'falling back to 500GeV')
    e = GEV500
endif
⟨Log energy mapping 39d⟩
Uses circem 86e and TESLA 13a.

55a ⟨Map roots to e at low energies 55a⟩≡ (54d)
    if (circe1_params%roots .eq. 90d0) then
        e = GEV090
    elseif ((circe1_params%roots .ge. 85d0) .and. (circe1_params%roots .le. 95d0)) then
        write (msgbuf, 2001) circe1_params%roots, 90d0
        call circem ('MESSAGE', msgbuf)
        e = GEV090
    elseif (circe1_params%roots .eq. 170d0) then
        e = GEV170
    elseif ((circe1_params%roots .ge. 160d0) .and. (circe1_params%roots .le. 180d0)) then
        write (msgbuf, 2001) circe1_params%roots, 170d0
        call circem ('MESSAGE', msgbuf)
        e = GEV170
    elseif (circe1_params%roots .eq. 350d0) then
        e = GEV350
    elseif ((circe1_params%roots .ge. 340d0) .and. (circe1_params%roots .le. 370d0)) then
        write (msgbuf, 2001) circe1_params%roots, 350d0
        call circem ('MESSAGE', msgbuf)
        e = GEV350
    elseif (circe1_params%roots .eq. 500d0) then
        e = GEV500
    elseif ((circe1_params%roots .ge. 480d0) .and. (circe1_params%roots .le. 520d0)) then
        write (msgbuf, 2001) circe1_params%roots, 500d0
        call circem ('MESSAGE', msgbuf)
        e = GEV500
    else
        call circem ('ERROR', &
                     'only ROOTS = 90, 170, 350, and 500GeV available')
        call circem ('MESSAGE', 'falling back to 500GeV')
        e = GEV500
    endif
Uses circem 86e.

55b ⟨Local variables for circes 33b⟩+≡ (32a) ▷53e 56a▷
    integer, parameter :: A6NEY = 2, A6NREV = 1

55c ⟨Update version 6 derived parameters in circe1 parameters 54c⟩+≡ (36d) ▷54d
    circe1_params%lumi = xa6lum (e,circe1_params%acc,r)

```

```

        do i = 0, 7
            circe1_params%a1(i) = xa6(i,e,circe1_params%acc,r)
        end do

56a  <Local variables for circes 33b>+≡ (32a) ◁55b 57c▷
    real, dimension(GEV090:A6NEGY,NACC,0:A6NREV), save :: xa6lum
    real, dimension(0:7,GEV090:A6NEGY,NACC,0:A6NREV), save :: xa6
Uses NACC 13b.
```

Revision 1. The mother of all revisions.

```

56b  <Initializations for circes 35b>+≡ (32a) ◁54b 56c▷
    xa6lum(GEV090,TESLA,1) = 0.62408E+02
    xa6(0:7,GEV090,TESLA,1) = (/ &
        0.72637E+00, 0.75534E+00, 0.18180E+03,-0.63426E+00, &
        0.36829E+00,-0.69653E+00, 0.18908E+03, 0.22157E+00 /)
    xa6lum(GEV170,TESLA,1) = 0.11532E+02
    xa6(0:7,GEV170,TESLA,1) = (/ &
        0.65232E+00, 0.67249E+00, 0.66862E+02,-0.63315E+00, &
        0.38470E+00,-0.69477E+00, 0.75120E+02, 0.30162E+00 /)
    xa6lum(GEV350,TESLA,1) = 0.24641E+03
    xa6(0:7,GEV350,TESLA,1) = (/ &
        0.54610E+00, 0.59105E+00, 0.20297E+02,-0.62747E+00, &
        0.41588E+00,-0.69188E+00, 0.26345E+02, 0.43818E+00 /)
    xa6lum(GEV500,TESLA,1) = 0.30340E+03
    xa6(0:7,GEV500,TESLA,1) = (/ &
        0.52744E+00, 0.52573E+00, 0.13895E+02,-0.63145E+00, &
        0.40824E+00,-0.69150E+00, 0.18645E+02, 0.47585E+00 /)
Uses TESLA 13a.
```

Revision 0. Currently identical to revision 1.

```

56c  <Initializations for circes 35b>+≡ (32a) ◁56b 59d▷
    xa6lum(GEV090,TESLA,0) = 0.62408E+02
    xa6(0:7,GEV090,TESLA,0) = (/ &
        0.72637E+00, 0.75534E+00, 0.18180E+03,-0.63426E+00, &
        0.36829E+00,-0.69653E+00, 0.18908E+03, 0.22157E+00 /)
    xa6lum(GEV170,TESLA,0) = 0.11532E+02
    xa6(0:7,GEV170,TESLA,0) = (/ &
        0.65232E+00, 0.67249E+00, 0.66862E+02,-0.63315E+00, &
        0.38470E+00,-0.69477E+00, 0.75120E+02, 0.30162E+00 /)
    xa6lum(GEV350,TESLA,0) = 0.24641E+03
    xa6(0:7,GEV350,TESLA,0) = (/ &
        0.54610E+00, 0.59105E+00, 0.20297E+02,-0.62747E+00, &
        0.41588E+00,-0.69188E+00, 0.26345E+02, 0.43818E+00 /)
    xa6lum(GEV500,TESLA,0) = 0.30340E+03
    xa6(0:7,GEV500,TESLA,0) = (/ &
        0.52744E+00, 0.52573E+00, 0.13895E+02,-0.63145E+00, &
        0.40824E+00,-0.69150E+00, 0.18645E+02, 0.47585E+00 /)
Uses TESLA 13a.
```

6.2.6 Version 7

```

56d  <Update version 7 derived parameters in circe1 parameters 56d>≡ (36d) 57a▷
```

```

        if (circe1_params%rev .eq. 0) then
            r = 0
        elseif (circe1_params%rev .ge. 20000426) then
            r = 1
        elseif (circe1_params%rev .lt. 20000426) then
            call circem ('ERROR', &
                'no revision of version 7 available before 2000/04/26')
            call circem ('MESSAGE', 'falling back to default')
            r = 1
        endif
    <Log revision mapping 38a>
Uses circem 86e.

57a <Update version 7 derived parameters in circe1 parameters 56d>+≡      (36d) ▷56d 59b▷
    if (circe1_params%acc .ne. TESLA .and. circe1_params%acc .ne. JLCNLC) then
        call circem ('ERROR', &
            'version 7 applies to TESLA and JLCNLC only')
        call circem ('ERROR', 'falling back to TESLA')
        circe1_params%acc = TESLA
    end if
    <Linearly interpolate energies 57d>
    <Log energy mapping 39d>
Uses circem 86e, JLCNLC 13a, and TESLA 13a.

57b <formats for circes 38d>+≡                               (32a) ▷39e
    2004 format ('energy ', F6.1, 'GeV too low, using spectrum for ', F6.1, 'GeV')
    2005 format ('energy ', F6.1, 'GeV too high, using spectrum for ', F6.1, 'GeV')
    2006 format ('energy ', F6.1, 'GeV interpolated between ', F6.1, ' and ', F6.1, 'GeV')

57c <Local variables for circes 33b>+≡                  (32a) ▷56a 59a▷
    real(kind=double) :: elo, ehi, parameter :: DELTAE = 0.5d0
The rules are as follows: XBAND has 500 GeV and 1 TeV, TESLA has 500 GeV and
800 TeV. Low energy TESLA will be added.

57d <Linearly interpolate energies 57d>≡          (57a 61b)
    e = GEV090 - 1
    elo = e
    ehi = e
    if (circe1_params%acc .eq. TESLA) then
        if (circe1_params%roots .lt. 90d0 - DELTAE) then
            write (msgbuf, 2004) circe1_params%roots, 90d0
            call circem ('MESSAGE', msgbuf)
            e = GEV090
        elseif (abs (circe1_params%roots-090d0) .le. DELTAE) then
            e = GEV090
        elseif (circe1_params%roots .lt. 170d0 - DELTAE) then
            write (msgbuf, 2005) circe1_params%roots, 170d0
            call circem ('MESSAGE', msgbuf)
            e = GEV170
        elseif (abs (circe1_params%roots-170d0) .le. DELTAE) then
            e = GEV170

```

```

elseif (circe1_params%roots .lt. 350d0-DELTAE) then
    write (msgbuf, 2006) circe1_params%roots, 170d0, 350d0
    call circem ('MESSAGE', msgbuf)
    elo = GEV170
    ehi = GEV350
    eloval = 170d0
    ehival = 350d0
elseif (abs (circe1_params%roots-350d0) .le. DELTAE) then
    e = GEV350
elseif (circe1_params%roots .lt. 500d0 - DELTAE) then
    write (msgbuf, 2006) circe1_params%roots, 350d0, 500d0
    call circem ('MESSAGE', msgbuf)
    elo = GEV350
    ehi = GEV500
    eloval = 350d0
    ehival = 500d0
elseif (abs (circe1_params%roots-500d0) .le. DELTAE) then
    e = GEV500
elseif (circe1_params%roots .lt. 800d0 - DELTAE) then
    write (msgbuf, 2006) circe1_params%roots, 500d0, 800d0
    call circem ('MESSAGE', msgbuf)
    elo = GEV500
    ehi = GEV800
    eloval = 500d0
    ehival = 800d0
elseif (abs (circe1_params%roots-800d0) .le. DELTAE) then
    e = GEV800
else
    write (msgbuf, 2005) circe1_params%roots, 800d0
    call circem ('MESSAGE', msgbuf)
    e = GEV800
endif
elseif (circe1_params%acc .eq. XBAND) then
    if (circe1_params%roots .lt. 500d0 - DELTAE) then
        write (msgbuf, 2004) circe1_params%roots, 500d0
        call circem ('MESSAGE', msgbuf)
        e = GEV500
    elseif (abs (circe1_params%roots-500d0) .le. DELTAE) then
        e = GEV500
    elseif (circe1_params%roots .lt. 1000d0 - DELTAE) then
        write (msgbuf, 2006) circe1_params%roots, 500d0, 1000d0
        call circem ('MESSAGE', msgbuf)
        elo = GEV500
        ehi = TEV1
        eloval = 500d0
        ehival = 1000d0
    elseif (abs (circe1_params%roots-1000d0) .le. DELTAE) then
        e = TEV1
    else
        write (msgbuf, 2005) circe1_params%roots, 1000d0

```

```

        call circem ('MESSAGE', msgbuf)
        e = TEV1
    endif
endif
Uses circem 86e, TESLA 13a, and XBAND 13a.

59a <Local variables for circes 33b>+≡ (32a) ▷57c 59c▷
    integer, parameter :: A7NEY = TEV1, A7NREV = 1
Note that ew must not interpolate a1(0) and a1(7) because they depend non-
linearly on the other parameters!
59b <Update version 7 derived parameters in circe1 parameters 56d>+≡ (36d) ▷57a
    if (e .ge. GEV090) then
        circe1_params%lumi = xa7lum(e,circe1_params%acc,r)
        do i = 0, 7
            circe1_params%a1(i) = xa7(i,e,circe1_params%acc,r)
        end do
    else if (elo .ge. GEV090 .and. ehi .ge. GEV090) then
        circe1_params%lumi = ((circe1_params%roots-eloval)*xa7lum(ehi,circe1_params%acc,
            + (ehival-circe1_params%roots)*xa7lum(elo,circe1_params%acc,r)) / (ehival -
        do i = 1, 6
            circe1_params%a1(i) = ((circe1_params%roots-eloval)*xa7(i,ehi,circe1_params%acc,
                + (ehival-circe1_params%roots)*xa7(i,elo,circe1_params%acc,r)) / (ehival -
        end do
        circe1_params%a1(0) = 1d0 - circe1_params%a1(1) * beta(circe1_params%a1(2)+1d0,
        circe1_params%a1(7) = circe1_params%a1(4) * beta(circe1_params%a1(5)+1d0,circe1_
    endif
Uses beta 105.

59c <Local variables for circes 33b>+≡ (32a) ▷59a 61c▷
    real, dimension(GEV090:A7NEY,NACC,0:A7NREV), save :: xa7lum
    real, dimension(0:7,GEV090:A7NEY,NACC,0:A7NREV), save :: xa7
Uses NACC 13b.

Revision 1. The mother of all revisions.

59d <Initializations for circes 35b>+≡ (32a) ▷56c 60a▷
    xa7lum(GEV090, TESLA, 1) = 0.62408E+02
    xa7(0:7,GEV090, TESLA, 1) = (/ &
        0.72637E+00, 0.75534E+00, 0.18180E+03,-0.63426E+00, &
        0.36829E+00,-0.69653E+00, 0.18908E+03, 0.22157E+00 /)
    xa7lum(GEV170, TESLA, 1) = 0.11532E+02
    xa7(0:7,GEV170, TESLA, 1) = (/ &
        0.65232E+00, 0.67249E+00, 0.66862E+02,-0.63315E+00, &
        0.38470E+00,-0.69477E+00, 0.75120E+02, 0.30162E+00 /)
    xa7lum(GEV350, TESLA, 1) = 0.24641E+03
    xa7(0:7,GEV350, TESLA, 1) = (/ &
        0.54610E+00, 0.59105E+00, 0.20297E+02,-0.62747E+00, &
        0.41588E+00,-0.69188E+00, 0.26345E+02, 0.43818E+00 /)
    xa7lum(GEV500, TESLA, 1) = 0.34704E+03
    xa7(0:7,GEV500, TESLA, 1) = (/ &
        0.51288E+00, 0.49025E+00, 0.99716E+01,-0.62850E+00, &
        0.41048E+00,-0.69065E+00, 0.13922E+02, 0.51902E+00 /)

```

```

xa7lum(GEV800, TESLA,1) = 0.57719E+03
xa7(0:7,GEV800, TESLA,1) = (/ &
  0.52490E+00, 0.42573E+00, 0.69069E+01,-0.62649E+00, &
  0.32380E+00,-0.68958E+00, 0.93819E+01, 0.45671E+00 /)
xa7lum(TEV1, TESLA,1) = -1.0

```

Uses TESLA 13a.

60a *<Initializations for circes 35b>+≡* (32a) ◁59d 60b▷

```

xa7lum(GEV090, JLCNLC,1) = -1.0
xa7lum(GEV170, JLCNLC,1) = -1.0
xa7lum(GEV350, JLCNLC,1) = -1.0
xa7lum(GEV500, JLCNLC,1) = 0.63039E+02
xa7(0:7,GEV500, JLCNLC,1) = (/ &
  0.58967E+00, 0.34035E+00, 0.63631E+01,-0.63683E+00, &
  0.33383E+00,-0.68803E+00, 0.81005E+01, 0.48702E+00 /)
xa7lum(TEV1, JLCNLC,1) = 0.12812E+03
xa7(0:7,TEV1, JLCNLC,1) = (/ &
  0.50222E+00, 0.33773E+00, 0.25681E+01,-0.61711E+00, &
  0.36826E+00,-0.68335E+00, 0.36746E+01, 0.65393E+00 /)

```

Uses JLCNLC 13a.

Revision 0.

60b *<Initializations for circes 35b>+≡* (32a) ◁60a 60c▷

```

xa7lum(GEV090, TESLA,0) = 0.62408E+02
xa7(0:7,GEV090, TESLA,0) = (/ &
  0.72637E+00, 0.75534E+00, 0.18180E+03,-0.63426E+00, &
  0.36829E+00,-0.69653E+00, 0.18908E+03, 0.22157E+00 /)
xa7lum(GEV170, TESLA,0) = 0.11532E+02
xa7(0:7,GEV170, TESLA,0) = (/ &
  0.65232E+00, 0.67249E+00, 0.66862E+02,-0.63315E+00, &
  0.38470E+00,-0.69477E+00, 0.75120E+02, 0.30162E+00 /)
xa7lum(GEV350, TESLA,0) = 0.24641E+03
xa7(0:7,GEV350, TESLA,0) = (/ &
  0.54610E+00, 0.59105E+00, 0.20297E+02,-0.62747E+00, &
  0.41588E+00,-0.69188E+00, 0.26345E+02, 0.43818E+00 /)
xa7lum(GEV500, TESLA,0) = 0.34704E+03
xa7(0:7,GEV500, TESLA,0) = (/ &
  0.51288E+00, 0.49025E+00, 0.99716E+01,-0.62850E+00, &
  0.41048E+00,-0.69065E+00, 0.13922E+02, 0.51902E+00 /)
xa7lum(GEV800, TESLA,0) = 0.57719E+03
xa7(0:7,GEV800, TESLA,0) = (/ &
  0.52490E+00, 0.42573E+00, 0.69069E+01,-0.62649E+00, &
  0.32380E+00,-0.68958E+00, 0.93819E+01, 0.45671E+00 /)
xa7lum(TEV1, TESLA,0) = -1.0

```

Uses TESLA 13a.

60c *<Initializations for circes 35b>+≡* (32a) ◁60b 62b▷

```

xa7lum(GEV090, JLCNLC,0) = -1.0
xa7lum(GEV170, JLCNLC,0) = -1.0
xa7lum(GEV350, JLCNLC,0) = -1.0
xa7lum(GEV500, JLCNLC,0) = 0.63039E+02

```

```

xa7(0:7,GEV500,JLCNLC,0) = (/ &
  0.58967E+00, 0.34035E+00, 0.63631E+01,-0.63683E+00, &
  0.33383E+00,-0.68803E+00, 0.81005E+01, 0.48702E+00 /)
xa7lum(TEV1,JLCNLC,0) = 0.12812E+03
xa7(0:7,TEV1,JLCNLC,0) = (/ &
  0.50222E+00, 0.33773E+00, 0.25681E+01,-0.61711E+00, &
  0.36826E+00,-0.68335E+00, 0.36746E+01, 0.65393E+00 /)

```

Uses **JLCNLC 13a**.

6.2.7 Version 8

```

61a  <Update version 8 derived parameters in circe1 parameters 61a>≡      (36d) 61b▷
      if (circe1_params%rev .eq. 0) then
        r = 0
      elseif (circe1_params%rev .ge. 20010617) then
        r = 1
      elseif (circe1_params%rev .lt. 20010617) then
        call circem ('ERROR', &
          'no revision of version 8 available before 2001/06/17')
        call circem ('MESSAGE', 'falling back to default')
        r = 1
      endif
      <Log revision mapping 38a>

```

Uses **circem 86e**.

```

61b  <Update version 8 derived parameters in circe1 parameters 61a>+≡      (36d) ▷61a 61d▷
      if (circe1_params%acc .eq. NLCH) then
        circe1_params%acc = JLCNLC
      end if
      if (circe1_params%acc .ne. JLCNLC) then
        call circem ('ERROR', &
          'version 8 applies to JLCNLC (NLC H) only')
        call circem ('ERROR', 'falling back to JLCNLC')
        circe1_params%acc = JLCNLC
      end if
      <Linearly interpolate energies 57d>
      <Log energy mapping 39d>

```

Uses **circem 86e** and **JLCNLC 13a**.

```

61c  <Local variables for circes 33b>+≡      (32a) ▷59c 62a▷
      integer, parameter :: A8NEY = TEV1, A8NREV = 1

```

Note that ew *must not* interpolate a1(0) and a1(7) because they depend non-linearly on the other parameters!

```

61d  <Update version 8 derived parameters in circe1 parameters 61a>+≡      (36d) ▷61b▷
      if (e .ge. GEV090) then
        circe1_params%lumi = xa8lum(e,circe1_params%acc,r)
        do i = 0, 7
          circe1_params%a1(i) = xa8(i,e,circe1_params%acc,r)
        end do
      elseif (elo .ge. GEV090 .and. ehi .ge. GEV090) then

```

```

circe1_params%lumi = ((circe1_params%roots-eloval)*xa8lum(ehi,circe1_params%acc
    + (ehival-circe1_params%roots)*xa8lum(elo,circe1_params%acc,r)) / (ehival -
do i = 1, 6
    circe1_params%a1(i) = ((circe1_params%roots-eloval)*xa8(i,ehi,circe1_params%
        + (ehival-circe1_params%roots)*xa8(i,elo,circe1_params%acc,r)) / (ehival
end do
circe1_params%a1(0) = 1d0 - circe1_params%a1(1) * beta(circe1_params%a1(2)+1d0,
circe1_params%a1(7) = circe1_params%a1(4) * beta(circe1_params%a1(5)+1d0,circe1
endif

```

Uses **beta** 105.

62a *<Local variables for circes 33b>+≡* (32a) ◁61c 65b▷
real, dimension(GEV090:A8NEGY,**NACC**,0:A8NREV), save :: xa8lum
real, dimension(0:7,GEV090:A8NEGY,**NACC**,0:A8NREV), save :: xa8

Uses **NACC** 13b.

Revision 1. The mother of all revisions.

62b *<Initializations for circes 35b>+≡* (32a) ◁60c 62c▷
xa8lum(GEV090,**TESLA**,1) = -1.0
xa8lum(GEV170,**TESLA**,1) = -1.0
xa8lum(GEV350,**TESLA**,1) = -1.0
xa8lum(GEV500,**TESLA**,1) = -1.0
xa8lum(GEV800,**TESLA**,1) = -1.0
xa8lum(TEV1, **TESLA**,1) = -1.0

Uses **TESLA** 13a.

62c *<Initializations for circes 35b>+≡* (32a) ◁62b 62d▷
xa8lum(GEV090,**JLCNLC**,1) = -1.0
xa8lum(GEV170,**JLCNLC**,1) = -1.0
xa8lum(GEV350,**JLCNLC**,1) = -1.0
xa8lum(GEV500,**JLCNLC**,1) = 0.239924E+03
xa8(0:7,GEV500,**JLCNLC**,1) = (/ &
 0.57025E+00, 0.34004E+00, 0.52864E+01,-0.63405E+00, &
 0.31627E+00,-0.68722E+00, 0.69629E+01, 0.47973E+00 /)
xa8lum(TEV1,**JLCNLC**,1) = 0.40858E+03
xa8(0:7,TEV1,**JLCNLC**,1) = (/ &
 0.52344E+00, 0.31536E+00, 0.25244E+01,-0.62215E+00, &
 0.31935E+00,-0.68424E+00, 0.35877E+01, 0.57315E+00 /)

Uses **JLCNLC** 13a.

Revision 0.

62d *<Initializations for circes 35b>+≡* (32a) ◁62c 62e▷
xa8lum(GEV090,**TESLA**,0) = -1.0
xa8lum(GEV170,**TESLA**,0) = -1.0
xa8lum(GEV350,**TESLA**,0) = -1.0
xa8lum(GEV500,**TESLA**,0) = -1.0
xa8lum(GEV800,**TESLA**,0) = -1.0
xa8lum(TEV1, **TESLA**,0) = -1.0

Uses **TESLA** 13a.

62e *<Initializations for circes 35b>+≡* (32a) ◁62d 66b▷
xa8lum(GEV090,**JLCNLC**,0) = -1.0

```

xa8lum(GEV170,JLCNLC,0) = -1.0
xa8lum(GEV350,JLCNLC,0) = -1.0
xa8lum(GEV500,JLCNLC,0) = 0.239924E+03
xa8(0:7,GEV500,JLCNLC,0) = (/ &
    0.57025E+00, 0.34004E+00, 0.52864E+01,-0.63405E+00, &
    0.31627E+00,-0.68722E+00, 0.69629E+01, 0.47973E+00 /)
xa8lum(TEV1,JLCNLC,0) = 0.40858E+03
xa8(0:7,TEV1,JLCNLC,0) = (/ &
    0.52344E+00, 0.31536E+00, 0.25244E+01,-0.62215E+00, &
    0.31935E+00,-0.68424E+00, 0.35877E+01, 0.57315E+00 /)

```

Uses JLCNLC 13a.

6.2.8 Version 9

63a ⟨Update version 9 derived parameters in circe1 parameters 63a⟩≡ (36d) 63b▷

```

if (circe1_params%rev .eq. 0) then
    r = 0
elseif (circe1_params%rev .ge. 20020328) then
    r = 1
elseif (circe1_params%rev .lt. 20020328) then
    call circem ('ERROR', &
        'no revision of version 9 available before 2002/03/28')
    call circem ('MESSAGE', 'falling back to default')
    r = 1
endif
⟨Log revision mapping 38a⟩

```

Uses circem 86e.

63b ⟨Update version 9 derived parameters in circe1 parameters 63a⟩+≡ (36d) ▷63a 65c▷

```

if (circe1_params%acc .ne. JLCNLC .and. circe1_params%acc .ne. NLCH) then
    call circem ('ERROR', &
        'version 9 applies to JLCNLC and NLCH only')
    call circem ('ERROR', 'falling back to JLCNLC')
    circe1_params%acc = JLCNLC
end if
if (circe1_params%acc .eq. JLCNLC) then
    ⟨Linearly interpolate energies for JLC/NLC 2002 63c⟩
else if (circe1_params%acc .eq. NLCH) then
    ⟨Linearly interpolate energies for NLC H 2002 65a⟩
end if
⟨Log energy mapping 39d⟩

```

Uses circem 86e and JLCNLC 13a.

63c ⟨Linearly interpolate energies for JLC/NLC 2002 63c⟩≡ (63b)

```

e = GEV090 - 1
elo = e
ehi = e
if (circe1_params%roots .lt. 250d0 - DELTAE) then
    write (msgbuf, 2004) circe1_params%roots, 250d0
    call circem ('MESSAGE', msgbuf)
    e = GEV250

```

```

elseif (abs (circe1_params%roots-250d0) .le. DELTAE) then
  e = GEV250
elseif (circe1_params%roots .lt. 500d0 - DELTAE) then
  write (msgbuf, 2006) circe1_params%roots, 250d0, 500d0
  call circem ('MESSAGE', msgbuf)
  elo = GEV250
  ehi = GEV500
  eloval = 250d0
  ehival = 500d0
elseif (abs (circe1_params%roots-500d0) .le. DELTAE) then
  e = GEV500
elseif (circe1_params%roots .lt. 800d0 - DELTAE) then
  write (msgbuf, 2006) circe1_params%roots, 500d0, 800d0
  call circem ('MESSAGE', msgbuf)
  elo = GEV500
  ehi = GEV800
  eloval = 500d0
  ehival = 800d0
elseif (abs (circe1_params%roots-800d0) .le. DELTAE) then
  e = GEV800
elseif (circe1_params%roots .lt. 1000d0 - DELTAE) then
  write (msgbuf, 2006) circe1_params%roots, 800d0, 1000d0
  call circem ('MESSAGE', msgbuf)
  elo = GEV800
  ehi = TEV1
  eloval = 800d0
  ehival = 1000d0
elseif (abs (circe1_params%roots-1000d0) .le. DELTAE) then
  e = TEV1
elseif (circe1_params%roots .lt. 1200d0 - DELTAE) then
  write (msgbuf, 2006) circe1_params%roots, 1000d0, 1200d0
  call circem ('MESSAGE', msgbuf)
  elo = TEV1
  ehi = TEV12
  eloval = 1000d0
  ehival = 1200d0
elseif (abs (circe1_params%roots-1200d0) .le. DELTAE) then
  e = TEV12
elseif (circe1_params%roots .lt. 1500d0 - DELTAE) then
  write (msgbuf, 2006) circe1_params%roots, 1200d0, 1500d0
  call circem ('MESSAGE', msgbuf)
  elo = TEV12
  ehi = TEV15
  eloval = 1200d0
  ehival = 1500d0
elseif (abs (circe1_params%roots-1500d0) .le. DELTAE) then
  e = TEV15
else
  write (msgbuf, 2005) circe1_params%roots, 1500d0
  call circem ('MESSAGE', msgbuf)

```

```

        e = TEV15
    endif
Uses circem 86e.

65a <Linearly interpolate energies for NLC H 2002 65a>≡ (63b)
    e = GEV090 - 1
    elo = e
    ehi = e
    if (circe1_params%roots .lt. 500d0 - DELTAE) then
        write (msgbuf, 2004) circe1_params%roots, 500d0
        call circem ('MESSAGE', msgbuf)
        e = GEV500
    elseif (abs (circe1_params%roots-500d0) .le. DELTAE) then
        e = GEV500
    elseif (circe1_params%roots .lt. 1000d0 - DELTAE) then
        write (msgbuf, 2006) circe1_params%roots, 500d0, 1000d0
        call circem ('MESSAGE', msgbuf)
        elo = GEV500
        ehi = TEV1
        eloval = 500d0
        ehival = 1000d0
    elseif (abs (circe1_params%roots-1000d0) .le. DELTAE) then
        e = TEV1
    elseif (circe1_params%roots .lt. 1500d0 - DELTAE) then
        write (msgbuf, 2006) circe1_params%roots, 1000d0, 1500d0
        call circem ('MESSAGE', msgbuf)
        elo = TEV1
        ehi = TEV15
        eloval = 1000d0
        ehival = 1500d0
    elseif (abs (circe1_params%roots-1500d0) .le. DELTAE) then
        e = TEV15
    else
        write (msgbuf, 2005) circe1_params%roots, 1500d0
        call circem ('MESSAGE', msgbuf)
        e = TEV15
    endif
Uses circem 86e.

65b <Local variables for circes 33b>+≡ (32a) ▷62a 66a▷
    integer, parameter :: A9NEY = TEV15, A9NREV = 1
Note that ew must not interpolate a1(0) and a1(7) because they depend non-linearly on the other parameters!
65c <Update version 9 derived parameters in circe1 parameters 63a>+≡ (36d) ▷63b
    if (e .ge. GEV090) then
        circe1_params%lumi = xa9lum(e,circe1_params%acc,r)
        do i = 0, 7
            circe1_params%a1(i) = xa9(i,e,circe1_params%acc,r)
        end do
    else if (elo .ge. GEV090 .and. ehi .ge. GEV090) then

```

```

circe1_params%lumi = ((circe1_params%roots-eloval)*xa9lum(ehi,circe1_params%acc
    + (ehival-circe1_params%roots)*xa9lum(elo,circe1_params%acc,r)) / (ehival -
do i = 1, 6
    circe1_params%a1(i) = ((circe1_params%roots-eloval)*xa9(i,ehi,circe1_params%
        + (ehival-circe1_params%roots)*xa9(i,elo,circe1_params%acc,r)) / (ehival
end do
circe1_params%a1(0) = 1d0 - circe1_params%a1(1) * beta(circe1_params%a1(2)+1d0,
circe1_params%a1(7) = circe1_params%a1(4) * beta(circe1_params%a1(5)+1d0,circe1
end if
Uses beta 105.

66a <Local variables for circes 33b>+≡ (32a) ◁65b 70a▷
    real, dimension(GEV090:A9NEGY,NACC,0:A9NREV) :: xa9lum
    real, dimension(0:7,GEV090:A9NEGY,NACC,0:A9NREV) :: xa9
Uses NACC 13b.

Revision 1. The mother of all revisions.

66b <Initializations for circes 35b>+≡ (32a) ◁62e 66c▷
    xa9lum(GEV090, TESLA,1) = -1.0
    xa9lum(GEV170, TESLA,1) = -1.0
    xa9lum(GEV350, TESLA,1) = -1.0
    xa9lum(GEV500, TESLA,1) = -1.0
    xa9lum(GEV800, TESLA,1) = -1.0
    xa9lum(TEV1, TESLA,1) = -1.0
    xa9lum(TEV12, TESLA,1) = -1.0
    xa9lum(TEV15, TESLA,1) = -1.0
    xa9lum(TEV16, TESLA,1) = -1.0
Uses TESLA 13a.

66c <Initializations for circes 35b>+≡ (32a) ◁66b 67a▷
    xa9lum(GEV090, JLCNL,1) = -1.0
    xa9lum(GEV170, JLCNL,1) = -1.0
    xa9lum(GEV250, JLCNL,1) = 109.886976
    xa9(0:7,GEV250, JLCNL,1) = (/ &
        0.65598E+00, 0.34993E+00, 0.13766E+02,-0.64698E+00, &
        0.29984E+00,-0.69053E+00, 0.16444E+02, 0.36060E+00 /)
    xa9lum(GEV350, JLCNL,1) = -1.0
    xa9lum(GEV500, JLCNL,1) = 220.806144
    xa9(0:7,GEV500, JLCNL,1) = (/ &
        0.57022E+00, 0.33782E+00, 0.52811E+01,-0.63540E+00, &
        0.32035E+00,-0.68776E+00, 0.69552E+01, 0.48751E+00 /)
    xa9lum(GEV800, JLCNL,1) = 304.63488
    xa9(0:7,GEV800, JLCNL,1) = (/ &
        0.54839E+00, 0.31823E+00, 0.33071E+01,-0.62671E+00, &
        0.31655E+00,-0.68468E+00, 0.45325E+01, 0.53449E+00 /)
    xa9lum(TEV1, JLCNL,1) = 319.95648
    xa9(0:7,TEV1, JLCNL,1) = (/ &
        0.56047E+00, 0.29479E+00, 0.28820E+01,-0.62856E+00, &
        0.29827E+00,-0.68423E+00, 0.39138E+01, 0.52297E+00 /)
    xa9lum(TEV12, JLCNL,1) = 349.90848
    xa9(0:7,TEV12, JLCNL,1) = (/ &

```

```

    0.56102E+00, 0.28503E+00, 0.24804E+01,-0.62563E+00, &
    0.29002E+00,-0.68376E+00, 0.33854E+01, 0.52736E+00 /)
xa9lum(TEV15,JLCNLC,1) = 363.15648
xa9(0:7,TEV15,JLCNLC,1) = (/ &
    0.57644E+00, 0.26570E+00, 0.22007E+01,-0.62566E+00, &
    0.27102E+00,-0.68283E+00, 0.29719E+01, 0.50764E+00 /)
xa9lum(TEV16,JLCNLC,1) = -1.0

```

Uses **JLCNLC** 13a.

67a *<Initializations for circles 35b>+≡* (32a) ◁ 66c 67b ▷

```

xa9lum(GEV090,NLCH,1) = -1.0
xa9lum(GEV170,NLCH,1) = -1.0
xa9lum(GEV250,NLCH,1) = -1.0
xa9lum(GEV350,NLCH,1) = -1.0
xa9lum(GEV500,NLCH,1) = 371.4624
xa9(0:7,GEV500,NLCH,1)= (/ &
    0.33933E+00, 0.55165E+00, 0.29138E+01,-0.57341E+00, &
    0.54323E+00,-0.68590E+00, 0.51786E+01, 0.88956E+00 /)
xa9lum(GEV800,NLCH,1) = -1.0
xa9lum(TEV1,NLCH,1) = 516.41856
xa9(0:7,TEV1,NLCH,1)= (/ &
    0.35478E+00, 0.46474E+00, 0.17666E+01,-0.56949E+00, &
    0.49269E+00,-0.68384E+00, 0.31781E+01, 0.91121E+00 /)
xa9lum(TEV12,NLCH,1) = -1.0
xa9lum(TEV15,NLCH,1) = 575.06688
xa9(0:7,TEV15,NLCH,1)= (/ &
    0.38183E+00, 0.40310E+00, 0.13704E+01,-0.57742E+00, &
    0.44548E+00,-0.68341E+00, 0.24956E+01, 0.87448E+00 /)
xa9lum(TEV16,NLCH, 1) = -1.0

```

Revision 0.

67b *<Initializations for circles 35b>+≡* (32a) ◁ 67a 67c ▷

```

xa9lum(GEV090,TESLA,0) = -1.0
xa9lum(GEV170,TESLA,0) = -1.0
xa9lum(GEV350,TESLA,0) = -1.0
xa9lum(GEV500,TESLA,0) = -1.0
xa9lum(GEV800,TESLA,0) = -1.0
xa9lum(TEV1, TESLA,0) = -1.0
xa9lum(TEV12, TESLA,0) = -1.0
xa9lum(TEV15, TESLA,0) = -1.0
xa9lum(TEV16, TESLA,0) = -1.0

```

Uses **TESLA** 13a.

67c *<Initializations for circles 35b>+≡* (32a) ◁ 67b 68a ▷

```

xa9lum(GEV090,JLCNLC,0) = -1.0
xa9lum(GEV170,JLCNLC,0) = -1.0
xa9lum(GEV250,JLCNLC,0) = 109.886976
xa9(0:7,GEV250,JLCNLC,0) = (/ &
    0.65598E+00, 0.34993E+00, 0.13766E+02,-0.64698E+00, &
    0.29984E+00,-0.69053E+00, 0.16444E+02, 0.36060E+00 /)
xa9lum(GEV350,JLCNLC,0) = -1.0

```

```

xa9lum(GEV500,JLCNLC,0) = 220.806144
xa9(0:7,GEV500,JLCNLC,0) = (/ &
  0.57022E+00, 0.33782E+00, 0.52811E+01,-0.63540E+00, &
  0.32035E+00,-0.68776E+00, 0.69552E+01, 0.48751E+00 /)
xa9lum(GEV800,JLCNLC,0) = 304.63488
xa9(0:7,GEV800,JLCNLC,0) = (/ &
  0.54839E+00, 0.31823E+00, 0.33071E+01,-0.62671E+00, &
  0.31655E+00,-0.68468E+00, 0.45325E+01, 0.53449E+00 /)
xa9lum(TEV1,JLCNLC,0) = 319.95648
xa9(0:7,TEV1,JLCNLC,0) = (/ &
  0.56047E+00, 0.29479E+00, 0.28820E+01,-0.62856E+00, &
  0.29827E+00,-0.68423E+00, 0.39138E+01, 0.52297E+00 /)
xa9lum(TEV12,JLCNLC,0) = 349.90848
xa9(0:7,TEV12,JLCNLC,0) = (/ &
  0.56102E+00, 0.28503E+00, 0.24804E+01,-0.62563E+00, &
  0.29002E+00,-0.68376E+00, 0.33854E+01, 0.52736E+00 /)
xa9lum(TEV15,JLCNLC,0) = 363.15648
xa9(0:7,TEV15,JLCNLC,0) = (/ &
  0.57644E+00, 0.26570E+00, 0.22007E+01,-0.62566E+00, &
  0.27102E+00,-0.68283E+00, 0.29719E+01, 0.50764E+00 /)
xa9lum(TEV16,JLCNLC,0) = -1.0

```

Uses JLCNLC 13a.

68a *(Initializations for circes 35b)* +≡ (32a) ▷ 67c 71a ▷

```

xa9lum(GEV090,NLCH,0) = -1.0
xa9lum(GEV170,NLCH,0) = -1.0
xa9lum(GEV250,NLCH,0) = -1.0
xa9lum(GEV350,NLCH,0) = -1.0
xa9lum(GEV500,NLCH,0) = 371.4624
xa9(0:7,GEV500,NLCH,0) = (/ &
  0.33933E+00, 0.55165E+00, 0.29138E+01,-0.57341E+00, &
  0.54323E+00,-0.68590E+00, 0.51786E+01, 0.88956E+00 /)
xa9lum(GEV800,NLCH,0) = -1.0
xa9lum(TEV1,NLCH,0) = 516.41856
xa9(0:7,TEV1,NLCH,0) = (/ &
  0.35478E+00, 0.46474E+00, 0.17666E+01,-0.56949E+00, &
  0.49269E+00,-0.68384E+00, 0.31781E+01, 0.91121E+00 /)
xa9lum(TEV12,NLCH,0) = -1.0
xa9lum(TEV15,NLCH,0) = 575.06688
xa9(0:7,TEV15,NLCH,0) = (/ &
  0.38183E+00, 0.40310E+00, 0.13704E+01,-0.57742E+00, &
  0.44548E+00,-0.68341E+00, 0.24956E+01, 0.87448E+00 /)
xa9lum(TEV16,NLCH,0) = -1.0

```

6.2.9 Version 10

68b *(Update version 10 derived parameters in circe1 parameters 68b)* +≡ (36d) 69a ▷

```

if (circe1_params%rev .eq. 0) then
  r = 0
elseif (circe1_params%rev .ge. 20140305) then

```

```

    r = 1
elseif (circe1_params%rev .lt. 20140305) then
    call circem ('ERROR', &
        'no revision of version 10 available before 2014/03/05')
    call circem ('MESSAGE', 'falling back to default')
    r = 1
endif
⟨Log revision mapping 38a⟩

```

Uses circem 86e.

69a ⟨Update version 10 derived parameters in circe1 parameters 68b⟩+≡ (36d) ▷68b 70b▷

```

if (circe1_params%acc .ne. ILC) then
    call circem ('ERROR', 'version 10 applies to ILC only')
    call circem ('ERROR', 'falling back to ILC')
    circe1_params%acc = ILC
end if
if (circe1_params%acc .eq. ILC) then
    ⟨Linearly interpolate energies for ILC 2013 69b⟩
end if
⟨Log energy mapping 39d⟩

```

Uses circem 86e and ILC 13a.

69b ⟨Linearly interpolate energies for ILC 2013 69b⟩≡ (69a)

```

e = -EINVAL
elo = -EINVAL
ehi = -EINVAL
if (circe1_params%roots .lt. 200d0 - DELTAE) then
    write (msgbuf, 2004) circe1_params%roots, 200d0
    call circem ('MESSAGE', msgbuf)
    e = GEV200
elseif (abs (circe1_params%roots-200d0) .le. DELTAE) then
    e = GEV200
elseif (circe1_params%roots .lt. 230d0 - DELTAE) then
    write (msgbuf, 2006) circe1_params%roots, 200d0, 230d0
    call circem ('MESSAGE', msgbuf)
    elo = GEV200
    ehi = GEV230
    eloval = 200d0
    ehival = 230d0
elseif (abs (circe1_params%roots-230d0) .le. DELTAE) then
    e = GEV230
elseif (circe1_params%roots .lt. 250d0 - DELTAE) then
    write (msgbuf, 2006) circe1_params%roots, 230d0, 250d0
    call circem ('MESSAGE', msgbuf)
    elo = GEV230
    ehi = GEV250
    eloval = 230d0
    ehival = 250d0
elseif (abs (circe1_params%roots-250d0) .le. DELTAE) then
    e = GEV250
elseif (circe1_params%roots .lt. 350d0 - DELTAE) then

```

```

write (msgbuf, 2006) circe1_params%roots, 250d0, 350d0
call circem ('MESSAGE', msgbuf)
elo = GEV250
ehi = GEV350
eloval = 250d0
ehival = 350d0
elseif (abs (circe1_params%roots-350d0) .le. DELTAE) then
  e = GEV350
elseif (circe1_params%roots .lt. 500d0 - DELTAE) then
  write (msgbuf, 2006) circe1_params%roots, 350d0, 500d0
  call circem ('MESSAGE', msgbuf)
  elo = GEV350
  ehi = GEV500
  eloval = 350d0
  ehival = 500d0
elseif (abs (circe1_params%roots-500d0) .le. DELTAE) then
  e = GEV500
else
  write (msgbuf, 2005) circe1_params%roots, 500d0
  call circem ('MESSAGE', msgbuf)
  e = GEV500
endif

```

Uses **circem** 86e.

70a *⟨Local variables for circes 33b⟩+≡* (32a) ◁66a 70c▷
 integer, parameter :: A1ONEGY = GEV230, A10NREV = 1

Note that *ew* must not interpolate *a1(0)* and *a1(7)* because they depend non-linearly on the other parameters!

70b *⟨Update version 10 derived parameters in circe1 parameters 68b⟩+≡* (36d) ◁69a
 if (*e* .ne. EINVAL) then
 circe1_params%lumi = xa10lum(*e*,circe1_params%acc,r)
 do *i* = 0, 7
 circe1_params%a1(*i*) = xa10(*i,e,circe1_params%acc,r*)
 end do
 else if (*elo* .ne. EINVAL .and. *ehi* .ne. EINVAL) then
 circe1_params%lumi = ((circe1_params%roots-eloval)*xa10lum(*ehi,circe1_params%acc,r*)
 + (ehival-circe1_params%roots)*xa10lum(*elo,circe1_params%acc,r*)) / (ehival
 do *i* = 1, 6
 circe1_params%a1(*i*) = ((circe1_params%roots-eloval)*xa10(*i,ehi,circe1_params%acc,r*)
 + (ehival-circe1_params%roots)*xa10(*i,elo,circe1_params%acc,r*)) / (ehival
 end do
 circe1_params%a1(0) = 1d0 - circe1_params%a1(1) * **beta**(circe1_params%a1(2)+1d0,
 circe1_params%a1(7) = circe1_params%a1(4) * **beta**(circe1_params%a1(5)+1d0,circe1
 end if

Uses **beta** 105.

70c *⟨Local variables for circes 33b⟩+≡* (32a) ◁70a
 real, dimension(GEV090:A10NEY, ILC:ILC,0:A10NREV) :: xa10lum
 real, dimension(0:7,GEV090:A10NEY, ILC:ILC,0:A10NREV) :: xa10
 Uses ILC 13a.

Revision 1. The mother of all revisions.

71a *<Initializations for circes 35b>+≡* (32a) ◁68a 71b▷
xa10lum = -1
xa10 = -1

71b *<Initializations for circes 35b>+≡* (32a) ◁71a 71c▷
xa10lum(GEV200, ILC, 1) = 56
xa10(:, GEV200, ILC, 1) = (/ &
0.66253E+00, 0.51646E+00, 0.43632E+02, -0.64508E+00, &
0.35915E+00, -0.69716E+00, 0.51645E+02, 0.32097E+00 /)
xa10lum(GEV230, ILC, 1) = 83
xa10(:, GEV230, ILC, 1) = (/ &
0.62360E+00, 0.52780E+00, 0.31915E+02, -0.64171E+00, &
0.38375E+00, -0.69529E+00, 0.39717E+02, 0.36597E+00 /)
xa10lum(GEV250, ILC, 1) = 97
xa10(:, GEV250, ILC, 1) = (/ &
0.59996E+00, 0.52141E+00, 0.26647E+02, -0.64331E+00, &
0.39186E+00, -0.69687E+00, 0.33764E+02, 0.39669E+00 /)
xa10lum(GEV350, ILC, 1) = 100
xa10(:, GEV350, ILC, 1) = (/ &
0.58875E+00, 0.50027E+00, 0.18594E+02, -0.63380E+00, &
0.38659E+00, -0.69239E+00, 0.23964E+02, 0.42049E+00 /)
xa10lum(GEV500, ILC, 1) = 180
xa10(:, GEV500, ILC, 1) = (/ &
0.46755E+00, 0.51768E+00, 0.83463E+01, -0.62311E+00, &
0.45704E+00, -0.69165E+00, 0.12372E+02, 0.60192E+00 /)

Uses ILC 13a.

71c *<Initializations for circes 35b>+≡* (32a) ◁71b 71d▷

Revision 0 The latest is the default:

71d *<Initializations for circes 35b>+≡* (32a) ◁71c
xa10lum(:,:,0) = xa10lum(:,:,A10NREV)
xa10(:,:, :,0) = xa10(:,:, :,A10NREV)

6.3 Special Functions

71e *<Module subroutines 31b>+≡* (30b) ◁43c 71f▷
function beta (a, b)
real(kind=double) :: a, b, beta
beta = exp (dlogam(a) + dlogam(b) - dlogam(a+b))
end function beta

Uses beta 105.

71f *<Module subroutines 31b>+≡* (30b) ◁71e 73b▷
!!! CERNLIB C304

```
function dlogam (x)
real(kind=double) :: dlogam
real(kind=double), dimension(7) :: p1, q1, p2, q2, p3, q3
```

```

real(kind=double), dimension(5) :: c, xl
real(kind=double) :: x, y, zero, one, two, half, ap, aq
integer :: i
data ZERO /0.0D0/, ONE /1.0D0/, TWO /2.0D0/, HALF /0.5D0/
data XL /0.0D0,0.5D0,1.5D0,4.0D0,12.0D0/
data p1 /+3.8428736567460D+0, +5.2706893753010D+1, &
         +5.5584045723515D+1, -2.1513513573726D+2, &
         -2.4587261722292D+2, -5.7500893603041D+1, &
         -2.3359098949513D+0/
data q1 /+1.0000000000000D+0, +3.3733047907071D+1, &
         +1.9387784034377D+2, +3.0882954973424D+2, &
         +1.5006839064891D+2, +2.0106851344334D+1, &
         +4.5717420282503D-1/
data p2 /+4.8740201396839D+0, +2.4884525168574D+2, &
         +2.1797366058896D+3, +3.7975124011525D+3, &
         -1.9778070769842D+3, -3.6929834005591D+3, &
         -5.6017773537804D+2/
data q2 /+1.0000000000000D+0, +9.5099917418209D+1, &
         +1.5612045277929D+3, +7.2340087928948D+3, &
         +1.0459576594059D+4, +4.1699415153200D+3, &
         +2.7678583623804D+2/
data p3 /-6.8806240094594D+3, -4.3069969819571D+5, &
         -4.7504594653440D+6, -2.9423445930322D+6, &
         +3.6321804931543D+7, -3.3567782814546D+6, &
         -2.4804369488286D+7/
data q3 /+1.0000000000000D+0, -1.4216829839651D+3, &
         -1.5552890280854D+5, -3.4152517108011D+6, &
         -2.0969623255804D+7, -3.4544175093344D+7, &
         -9.1605582863713D+6/
data c / 1.1224921356561D-1, 7.9591692961204D-2, &
         -1.7087794611020D-3, 9.1893853320467D-1, &
         1.3469905627879D+0/
if (x .le. xl(1)) then
    print *, 'ERROR: DLOGAM non positive argument: ', x
    dlogam = zero
end if
if (x .le. xl(2)) then
    y = x + one
    ap = p1(1)
    aq = q1(1)
    do i = 2, 7
        ap = p1(i) + y * ap
        aq = q1(i) + y * aq
    end do
    y = - log(x) + x * ap / aq
else if (x .le. xl(3)) then
    ap = p1(1)
    aq = q1(1)
    do i = 2, 7
        ap = p1(i) + x * ap

```

```

        aq = q1(i) + x * aq
    end do
    y = (x - one) * ap / aq
else if (x .le. xl(4)) then
    ap = p2(1)
    aq = q2(1)
    do i = 2, 7
        ap = p2(i) + x * ap
        aq = q2(i) + x * aq
    end do
    y = (x-two) * ap / aq
else if (x .le. xl(5)) then
    ap = p3(1)
    aq = q3(1)
    do i = 2, 7
        ap = p3(i) + x * ap
        aq = q3(i) + x * aq
    end do
    y = ap / aq
else
    y = one / x**2
    y = (x-half) * log(x) - x + c(4) + &
        (c(1) + y * (c(2) + y * c(3))) / ((c(5) + y) * x)
end if
dlogam = y
end function dlogam

```

6.4 Non-Singular Distributions

73a *<Public subroutines 31a>*+≡
 public :: kirke

(30b) ▷ 43b 74a ▷

Uses kirke 73b.

73b *<Module subroutines 31b>*+≡
 function kirke (x1, x2, p1, p2)
 real(kind=double) :: x1, x2
 real(kind=double) :: kirke
 integer :: p1, p2
<Initialization check 32g>
 kirke = -1.0
 if (abs(p1) .eq. C1_ELECTRON) then
 if (abs(p2) .eq. C1_ELECTRON) then
 kirke = kirkee (x1, x2)
 else if (p2 .eq. C1_PHOTON) then
 kirke = kirkeg (x1, x2)
 end if
 else if (p1 .eq. C1_PHOTON) then
 if (abs(p2) .eq. C1_ELECTRON) then
 kirke = kirkeg (x2, x1)

(30b) ▷ 71f 74b ▷

```

        else if (p2 .eq. C1_PHOTON) then
            kirke = kirkgg (x1, x2)
        end if
    endif
end function kirke

```

Defines:

kirke, used in chunk 73a.
Uses C1_ELECTRON 11b, C1_PHOTON 11b, kirkee 74b, kirkeg 76c, and kirkgg 77a.

74a \langle Public subroutines 31a $\rangle + \equiv$ (30b) \triangleleft 73a 76b \triangleright
 public :: kirkee

Uses kirkee 74b.

74b \langle Module subroutines 31b $\rangle + \equiv$ (30b) \triangleleft 73b 76c \triangleright
 function kirkee (x1, x2)
 real(kind=double) :: x1, x2
 real(kind=double) :: kirkee
 real(kind=double) :: d1, d2
(Initialization check 32g)
 kirkee = -1.0
 if ((circe1_params%ver .eq. 1) .or. (circe1_params%ver .eq. 0)) then
(Calculate version 1 of the non-singular e^+e^- distribution 75c)
(else handle invalid versions 37b)
 end function kirkee

Defines:

kirkee, used in chunks 17a and 73–75.
Uses d1 16a and d2 16c.

74c \langle 8-byte aligned part of circe1 parameters 32d $\rangle + \equiv$ (32c) \triangleleft 40a
 real(kind=double) :: elect0, gamma0

$$\int_{1-\epsilon}^{1^+} dx d_{e^\pm}^{\alpha_1\rho}(x) = a_0^{\alpha\rho} + a_1^{\alpha\rho} \int_{1-\epsilon}^{1^-} dx x^{a_2^{\alpha\rho}} (1-x)^{a_3^{\alpha\rho}} \quad (18)$$

Approximately

$$\int_{1-\epsilon}^{1^+} dx d_{e^\pm}^{\alpha_1\rho}(x) = a_0^{\alpha\rho} + a_1^{\alpha\rho} \int_{1-\epsilon}^{1^-} dx (1-x)^{a_3^{\alpha\rho}} = a_0^{\alpha\rho} + a_1^{\alpha\rho} \int_{0^+}^{\epsilon} d\xi \xi^{a_3^{\alpha\rho}} \quad (19)$$

and therefore

$$\int_{1-\epsilon}^{1^+} dx d_{e^\pm}^{\alpha_1\rho}(x) = a_0^{\alpha\rho} + a_1^{\alpha\rho} \frac{1 - \epsilon^{a_3^{\alpha\rho}+1}}{a_3^{\alpha\rho} + 1} \quad (20)$$

This simple approximation is good enough

74d \langle Update circe1 parameters 33a $\rangle + \equiv$ (32a) \triangleleft 36d
 circe1_params%elect0 = circe1_params%a1(0) + circe1_params%a1(1) * KIREPS** (circe1_params%a1(2) / KIREPS)
 circe1_params%elect0 = circe1_params%elect0 / KIREPS
 circe1_params%gamma0 = circe1_params%a1(4) * KIREPS** (circe1_params%a1(5)+1) / (circe1_params%a1(6) / KIREPS)
 circe1_params%gamma0 = circe1_params%gamma0 / KIREPS

but we can also use incomplete Beta functions for the exact result:

75a *(Alternative: Update circe1 parameters 75a)* \equiv

```

circe1_params%elect0 = circe1_params%a1(0) + circe1_params%a1(1) * beta (circe1_pa
                      * (1d0 - betinc (circe1_params%a1(2)+1, circe1_params%a1(3)+1, 1d0 -
circe1_params%elect0 = circe1_params%elect0 / KIREPS
circe1_params%gamma0 = circe1_params%a1(7) + circe1_params%a1(4) * beta (circe1_pa
                      * betinc (circe1_params%a1(5)+1, circe1_params%a1(6)+1, KIREPS)
circe1_params%gamma0 = circe1_params%gamma0 / KIREPS

```

Uses **beta** 105.

75b *(Alternative: Local variables for circes 75b)* \equiv

```

real(kind=double) :: betinc
external betinc
```

75c *(Calculate version 1 of the non-singular e^+e^- distribution 75c)* \equiv

```

if (x1 .gt. 1d0) then
  d1 = 0d0
elseif (x1 .ge. (1d0 - KIREPS)) then
  d1 = circe1_params%elect0
elseif (x1 .ge. 0d0) then
  d1 = circe1_params%a1(1) * x1**circe1_params%a1(2) * (1d0 - x1)**circe1_params%
else
  d1 = 0d0
endif
if (x2 .gt. 1d0) then
  d2 = 0d0
elseif (x2 .ge. (1d0 - KIREPS)) then
  d2 = circe1_params%elect0
elseif (x2 .ge. 0d0) then
  d2 = circe1_params%a1(1) * x2**circe1_params%a1(2) * (1d0 - x2)**circe1_params%
else
  d2 = 0d0
endif
kirkee = d1 * d2
```

Uses **d1** 16a, **d2** 16c, and **kirkee** 74b.

75d *(Calculate version 1 of the non-singular $e^\pm\gamma$ distribution 75d)* \equiv

```

if (x1 .gt. 1d0) then
  d1 = 0d0
elseif (x1 .ge. (1d0 - KIREPS)) then
  d1 = circe1_params%elect0
elseif (x1 .ge. 0d0) then
  d1 = circe1_params%a1(1) * x1**circe1_params%a1(2) * (1d0 - x1)**circe1_params%
else
  d1 = 0d0
endif
if (x2 .gt. 1d0) then
  d2 = 0d0
elseif (x2 .gt. KIREPS) then
  d2 = circe1_params%a1(4) * x2**circe1_params%a1(5) * (1d0 - x2)**circe1_params%
elseif (x2 .ge. 0d0) then
```

```

d2 = circe1_params%gamma0
else
    d2 = 0d0
endif
kirkeg = d1 * d2

```

Uses d1 16a, d2 16c, and kirkeg 76c.

76a <Calculate version 1 of the non-singular $\gamma\gamma$ distribution 76a>+≡

(77a)

```

if (x1 .gt. 1d0) then
    d1 = 0d0
elseif (x1 .gt. KIREPS) then
    d1 = circe1_params%a1(4) * x1*circe1_params%a1(5) * (1d0 - x1)*circe1_params%
elseif (x1 .ge. 0d0) then
    d1 = circe1_params%gamma0
else
    d1 = 0d0
endif
if (x2 .gt. 1d0) then
    d2 = 0d0
elseif (x2 .gt. KIREPS) then
    d2 = circe1_params%a1(4) * x2*circe1_params%a1(5) * (1d0 - x2)*circe1_params%
elseif (x2 .ge. 0d0) then
    d2 = circe1_params%gamma0
else
    d2 = 0d0
endif
kirkgg = d1 * d2

```

Uses d1 16a, d2 16c, and kirkgg 77a.

76b <Public subroutines 31a>+≡

(30b) ◄74a 76d►

```
public :: kirkeg
```

Uses kirkeg 76c.

76c <Module subroutines 31b>+≡

(30b) ◄74b 77a►

```

function kirkeg (x1, x2)
    real(kind=double) :: x1, x2
    real(kind=double) :: kirkeg
    real(kind=double) :: d1, d2
    <Initialization check 32g>
    kirkeg = -1.0
    if ((circe1_params%ver .eq. 1) .or. (circe1_params%ver .eq. 0)) then
        <Calculate version 1 of the non-singular  $e^\pm\gamma$  distribution 75d>
    <else handle invalid versions 37b>
end function kirkeg

```

Defines:

kirkeg, used in chunks 73b, 75d, and 76b.

Uses d1 16a and d2 16c.

76d <Public subroutines 31a>+≡

(30b) ◄76b 80b►

```
public :: kirkgg
```

Uses kirkgg 77a.

77a *(Module subroutines 31b)* +≡ (30b) ◁ 76c 79b ▷

```

function kirkgg (x1, x2)
    real(kind=double) :: x1, x2
    real(kind=double) :: kirkgg
    real(kind=double) :: d1, d2
    (Initialization check 32g)
    kirkgg = -1.0
    if ((circe1_params%ver .eq. 1) .or. (circe1_params%ver .eq. 0)) then
        (Calculate version 1 of the non-singular  $\gamma\gamma$  distribution 76a)
    (else handle invalid versions 37b)
end function kirkgg

```

Defines:

 kirkgg, used in chunks 73b and 76.

Uses d1 16a and d2 16c.

77b *(Alternative: Subroutines 77b)* ≡ 77c ▷

```

function betinc (a, b, x)
    real(kind=double) :: x, a, b
    real(kind=double) :: betinc
    real(kind=double) :: bt
    if (x .lt. 0d0 .or. x .gt. 1d0) then
        betinc = 0d0
    else
        if (x .eq. 0d0 .or. x .eq. 1d0) then
            bt = 0d0
        else
            bt = exp(dlogam(a+b)-dlogam(a)-dlogam(b) &
                      + a*log(x) + b*log(1d0-x))
        end if
        if (x .lt. (a+1d0)/ (a+b+2d0)) then
            betinc = bt*betacf (a, b, x) / a
        else
            betinc = 1d0 - bt*betacf (b, a, 1d0-x) / b
        end if
    end if
end function betinc

```

77c *(Alternative: Subroutines 77b)* +≡ ◁ 77b

```

function betacf (a, b, x)
    real(kind=double) :: x, a, b
    real(kind=double) :: betacf
    integer, parameter :: itmax = 100
    real(kind=double), parameter = eps = 3d-7
    real(kind=double) :: am, bm, curr, prev, qab, qap, qam, bz, &
                      ap, bp, app, bpp, em, tem, d
    integer :: m
    am = 1d0
    bm = 1d0
    curr = 1d0

```

```

qab = a + b
qap = a + 1d0
qam = a - 1d0
bz = 1d0 - qab * x / qap
do m = 1, ITMAX
    em = m
    tem = 2*em
    d = em * (b - m) * x / ((qam + tem) * (a + tem))
    ap = curr + d*am
    bp = bz + d*bm
    d = - (a + em) * (qab + em) * x / ((a + tem) * (qap + tem))
    app = ap + d * curr
    bpp = bp + d * bz
    prev = curr
    am = ap / bpp
    bm = bp / bpp
    curr = app / bpp
    bz = 1d0
    if (abs (curr - prev) .lt. EPS * abs (curr)) then
        betacf = curr
        return
    end if
end do
print *, 'betacf: failed to converge'
betacf = 0d0
end

```

6.5 Generators

6.5.1 Random-Number Generator

The generator routines do not fix or provide a random-number generator. The caller has to provide an implementation which is transferred to the subroutines in one of two possible forms:

1. as a subroutine which generates a single random number, working on an implicit external state
2. as an object with a method that generates a single random number, working on an internal state

These snippets should be used by the procedures that use a RNG:

78a $\langle RNG \text{ dummy arguments } 78a \rangle \equiv$ (79–84)
78b $\langle RNG \text{ dummy declarations } 78b \rangle \equiv$ (79–84)
 rng, rng_obj
 procedure(rng_proc), optional :: rng
 class(rng_type), intent(inout), optional :: rng_obj
 Uses rng_proc 79c and rng_type 79e.

79a $\langle RNG: generate u \rangle \equiv$ (81 82 84b 85a)
 call **rng_call** (u, $\langle RNG \text{ dummy arguments } \rangle$)
 Uses **rng_call** 79b.

79b $\langle \text{Module subroutines } \rangle + \equiv$ (30b) $\triangleleft 77a \ 80c \triangleright$
 subroutine **rng_call** (u, $\langle RNG \text{ dummy arguments } \rangle$)
 real(kind=double), intent(out) :: u
 (RNG dummy declarations 78b)
 if (present (rng)) then
 call rng (u)
 else if (present (rng_obj)) then
 call rng_obj%generate (u)
 else
 call **circem** ('PANIC', &
 'generator requires either rng or rng_obj argument')
 end if
 end subroutine **rng_call**

Defines:

rng_call, used in chunk 79a.
 Uses **circem** 86e.

This defines the procedure version of the RNG, corresponding to the traditional F77 **external** interface. The abstract interface enables the compiler to check conformance.

79c $\langle \text{Abstract interfaces } \rangle \equiv$ (30b) 80a \triangleright
 abstract interface
 subroutine **rng_proc** (u)
 import :: double
 real(kind=double), intent(out) :: u
 end subroutine **rng_proc**
 end interface

Defines:

rng_proc, used in chunk 78b.

Here we define the object version of the RNG. It has to implement a **generate** method which parallels the **rng_proc** procedure above.

79d $\langle \text{Public types } \rangle \equiv$ (30b)
 public :: **rng_type**
 Uses **rng_type** 79e.

79e $\langle \text{Abstract types } \rangle \equiv$ (30b)
 type, abstract :: **rng_type**
 contains
 procedure(**rng_generate**), deferred :: generate
 end type **rng_type**

Defines:

rng_type, used in chunks 78–80.
 Uses **rng_generate** 80a.

```

80a  <Abstract interfaces 79c>+≡          (30b) ▷79c
      abstract interface
        subroutine rng_generate (rng_obj, u)
          import :: rng_type, double
          class(rng_type), intent(inout) :: rng_obj
          real(kind=double), intent(out) :: u
        end subroutine rng_generate
      end interface

```

Defines:

 rng_generate, used in chunk 79e.
 Uses rng_type 79e.

6.5.2 Version 1

Beta distributions have the practical advantage that they have been popular among mathematicians.[?]

```

80b  <Public subroutines 31a>+≡          (30b) ▷76d 81d▷
      public :: girce
    Uses girce 80c.

80c  <Module subroutines 31b>+≡          (30b) ▷79b 81e▷
      subroutine girce (x1, x2, p1, p2, <RNG dummy arguments 78a>)
        real(kind=double), intent(out) :: x1, x2
        integer :: p1, p2
        <RNG dummy declarations 78b>
        real(kind=double) :: u, w
      <Initialization check 32g>
      <x1m, x2m kludge, part 1 81b>
      <Select particles p1 and p2 81a>
        if (abs(p1) .eq. C1_ELECTRON) then
          if (abs(p2) .eq. C1_ELECTRON) then
            call gircee (x1, x2, <RNG dummy arguments 78a>)
          else if (p2 .eq. C1_PHOTON) then
            call girceg (x1, x2, <RNG dummy arguments 78a>)
          end if
        else if (p1 .eq. C1_PHOTON) then
          if (abs(p2) .eq. C1_ELECTRON) then
            call girceg (x2, x1, <RNG dummy arguments 78a>)
          else if (p2 .eq. C1_PHOTON) then
            call gircgg (x1, x2, <RNG dummy arguments 78a>)
          end if
        end if
      <x1m, x2m kludge, part 2 81c>
    end subroutine girce

```

Defines:

 girce, used in chunks 20a and 80b.
 Uses C1_ELECTRON 11b, C1_PHOTON 11b, gircee 81e, girceg 82c, and gircgg 83c.

```

81a  ⟨Select particles p1 and p2 81a⟩≡ (80c)
      w = 1d0 / (1d0 + circgg (-1d0, -1d0))
      ⟨RNG: generate u 79a⟩
      if (u*u .le. w) then
          p1 = C1_POSITRON
      else
          p1 = C1_PHOTON
      end if
      ⟨RNG: generate u 79a⟩
      if (u*u .le. w) then
          p2 = C1_ELECTRON
      else
          p2 = C1_PHOTON
      end if
Uses C1_ELECTRON 11b, C1_PHOTON 11b, C1_POSITRON 11b, and circgg 43c.

The flavor selection is incorrect, because the relative weights depend on the
minimum energy fractions. We resort to a moderately inefficient kludge, because
we don't have the distribution functions available yet. We'll have to implement
incomplete Beta functions and other horrible things for this. Fortunately, the
efficiency can not drop below the relative contribution of  $e^+e^-$ .
81b  ⟨x1m, x2m kludge, part 1 81b⟩≡ (80c)
      do
      Crude rejection:
81c  ⟨x1m, x2m kludge, part 2 81c⟩≡ (80c)
      if ((x1 .ge. circe1_params%x1m) .and. (x2 .ge. circe1_params%x2m)) exit
      end do
81d  ⟨Public subroutines 31a⟩+≡ (30b) ◁80b 82b▷
      public :: gircee
      Uses gircee 81e.
81e  ⟨Module subroutines 31b⟩+≡ (30b) ◁80c 82c▷
      subroutine gircee (x1, x2, ⟨RNG dummy arguments 78a⟩)
          real(kind=double), intent(out) :: x1, x2
          ⟨RNG dummy declarations 78b⟩
          real(kind=double) :: u
          ⟨Initialization check 32g⟩
          x1 = 1
          x2 = 1
          if ((circe1_params%ver .eq. 1) .or. (circe1_params%ver .eq. 0)) then
              ⟨Generate version 1 of the  $e^+e^-$  distribution 82a⟩
          ⟨else handle invalid versions 37b⟩
      end subroutine gircee

```

Defines:

gircee, used in chunks 20, 21d, 80c, and 81d.

For version 1 of the parametrizations we rely on **girceb**, a fast generator of β -distributions:

$$\beta_{x_{\min}, x_{\max}}^{a,b}(x) = x^{a-1}(1-x)^{b-1} \cdot \frac{\Theta(x_{\max} - x)\Theta(x - x_{\min})}{I(x_{\min}, a, b) - I(x_{\max}, a, b)} \quad (21)$$

$$I(x, a, b) = \int_x^1 d\xi \xi^{a-1} (1-\xi)^{b-1} \quad (22)$$

82a *(Generate version 1 of the e^+e^- distribution 82a)* \equiv (81e)
(RNG: generate u 79a)
 if (u .le. circe1_params%a1(0)) then
 x1 = 1d0
 else
 x1 = 1d0 - **girceb** (0d0, 1d0-circe1_params%x1m, &
 circe1_params%a1(3)+1d0, circe1_params%a1(2)+1d0, &
(RNG dummy arguments 78a))
 endif
(RNG: generate u 79a)
 if (u .le. circe1_params%a1(0)) then
 x2 = 1d0
 else
 x2 = 1d0 - **girceb** (0d0, 1d0-circe1_params%x2m, &
 circe1_params%a1(3)+1d0, circe1_params%a1(2)+1d0, &
(RNG dummy arguments 78a))
 endif
 Uses **girceb** 84b.

82b *(Public subroutines 31a)* \equiv (30b) \triangleleft 81d 83a \triangleright
 public :: **girceg**
 Uses **girceg** 82c.

82c *(Module subroutines 31b)* \equiv (30b) \triangleleft 81e 83b \triangleright
 subroutine **girceg** (x1, x2, *(RNG dummy arguments 78a)*)
 real(kind=double), intent(out) :: x1, x2
(RNG dummy declarations 78b)
 real(kind=double) :: u
(Initialization check 32g)
 x1 = 1
 x2 = 1
 if ((circe1_params%ver .eq. 1) .or. (circe1_params%ver .eq. 0)) then
(Generate version 1 of the $e^\pm\gamma$ distribution 82d)
(else handle invalid versions 37b)
 end subroutine **girceg**

Defines:
girceg, used in chunks 20c, 80c, and 82b.

82d *(Generate version 1 of the $e^\pm\gamma$ distribution 82d)* \equiv (82c)
(RNG: generate u 79a)
 if (u .le. circe1_params%a1(0)) then
 x1 = 1d0
 else
 x1 = 1d0 - **girceb** (0d0, 1d0-circe1_params%x1m, &
 circe1_params%a1(3)+1d0, circe1_params%a1(2)+1d0, &
(RNG dummy arguments 78a))
 endif
 x2 = **girceb** (circe1_params%x2m, 1d0, &

```

    circe1_params%a1(5)+1d0, circe1_params%a1(6)+1d0, &
    (RNG dummy arguments 78a)⟩

Uses girceb 84b.

83a ⟨Public subroutines 31a⟩+≡ (30b) ◁ 82b 84a ▷
    public :: gircgg
Uses gircgg 83c.

83b ⟨Module subroutines 31b⟩+≡ (30b) ◁ 82c 84b ▷
    subroutine gircgg (x1, x2, (RNG dummy arguments 78a))
        real(kind=double), intent(out) :: x1, x2
        (RNG dummy declarations 78b)
        (Initialization check 32g)
        x1 = 1
        x2 = 1
        if ((circe1_params%ver .eq. 1) .or. (circe1_params%ver .eq. 0)) then
            (Generate version 1 of the  $\gamma\gamma$  distribution 83c)
        (else handle invalid versions 37b)
    end subroutine gircgg

```

Uses **gircgg** 83c.

```

83c ⟨Generate version 1 of the  $\gamma\gamma$  distribution 83c⟩≡ (83b)
    x1 = girceb (circe1_params%x1m, 1d0, &
                  circe1_params%a1(5)+1d0, circe1_params%a1(6)+1d0, &
                  (RNG dummy arguments 78a))
    x2 = girceb (circe1_params%x2m, 1d0, &
                  circe1_params%a1(5)+1d0, circe1_params%a1(6)+1d0, &
                  (RNG dummy arguments 78a))

```

Defines:
gircgg, used in chunks 20c, 80c, and 83.
Uses **girceb** 84b.

6.5.3 Version 2

Retired.

6.5.4 Version 3 and 4

Identical to version 1.

6.6 Utilities

For version 1 of the parametrizations we need a fast generator of β -distributions:

$$\beta_{x_{\min}, x_{\max}}^{a,b}(x) = x^{a-1}(1-x)^{b-1} \cdot \frac{\Theta(x_{\max} - x)\Theta(x - x_{\min})}{I(x_{\min}, a, b) - I(x_{\max}, a, b)} \quad (23)$$

with the *incomplete Beta-function* I :

$$I(x, a, b) = \int_x^1 d\xi \xi^{a-1}(1-\xi)^{b-1} \quad (24)$$

$$B(a, b) = I(0, a, b) \quad (25)$$

This problem has been studied extensively [?] and we can use an algorithm [18] that is very fast for $0 < a \leq 1 \leq b$, which turns out to be the case in our application.

84a *⟨Public subroutines 31a⟩+≡* (30b) ◀83a 86d▶
 public :: **girceb**
 Uses **girceb** 84b.

84b *⟨Module subroutines 31b⟩+≡* (30b) ◀83b 86e▶
 function **girceb** (xmin, xmax, a, b, *⟨RNG dummy arguments 78a⟩*)
 real(kind=double) :: xmin, xmax, a, b
 real(kind=double) :: **girceb**
⟨RNG dummy declarations 78b⟩
 real(kind=double) :: t, p, u, umin, umax, x, w
⟨Check a and b 84c⟩
⟨Set up girceb parameters 84d⟩
 do
⟨Generate a trial x and calculate its weight w 85a⟩
⟨RNG: generate u 79a⟩
 if (w .gt. u) exit
 end do
girceb = x
end function **girceb**

Defines:

girceb, used in chunks 82–84 and 86b.

In fact, this algorithm works for $0 < a \leq 1 \leq b$ only:

84c *⟨Check a and b 84c⟩≡* (84b)
 if ((a .ge. 1d0) .or. (b .le. 1d0)) then
girceb = -1d0
 call **circem** ('ERROR', 'beta-distribution expects a<1<b')
 return
 end if

Uses **circem** 86e and **girceb** 84b.

The trick is to split the interval $[0, 1]$ into two parts $[0, t]$ and $[t, 1]$. In these intervals we obviously have

$$x^{a-1}(1-x)^{b-1} \leq \begin{cases} x^{a-1} & \text{for } x \leq t \\ t^{a-1}(1-x)^{b-1} & \text{for } x \geq t \end{cases} \quad (26)$$

because we have assumed that $0 < a < 1 < b$. The integrals of the two dominating distributions are t^a/a and $t^{a-1}(1-t)^b/b$ respectively and therefore the probability for picking a random number from the first interval is

$$P(x \leq t) = \frac{bt}{bt + a(1-t)^b} \quad (27)$$

We postpone the discussion of the choice of t until later:

84d *⟨Set up girceb parameters 84d⟩≡* (84b) 85b▶
⟨Set up best value for t 86c⟩
 p = b*t / (b*t + a * (1d0 - t)**b)

The dominating distributions can be generated by simple mappings

$$\phi : [0, 1] \rightarrow [0, 1] \quad (28)$$

$$u \mapsto \begin{cases} t \left(\frac{u}{p} \right)^{\frac{1}{a}} & < t \text{ for } u < p \\ t & = t \text{ for } u = p \\ 1 - (1 - t) \left(\frac{1-u}{1-p} \right)^{\frac{1}{b}} & > t \text{ for } u > p \end{cases} \quad (29)$$

The beauty of the algorithm is that we can use a single uniform deviate u for both intervals:

85a *⟨Generate a trial x and calculate its weight w 85a⟩≡* (84b)
⟨RNG: generate u 79a⟩
 $u = \text{umin} + (\text{umax} - \text{umin}) * u$
 $\text{if } (u \leq p) \text{ then}$
 $x = t * (u/p)^{(1d0/a)}$
 $w = (1d0 - x)^{(b-1d0)}$
 else
 $x = 1d0 - (1d0 - t) * ((1d0 - u)/(1d0 - p))^{(1d0/b)}$
 $w = (x/t)^{(a-1d0)}$
 end if

The weights that are derived by dividing the distribution by the dominating distributions are already normalized correctly:

$$w : [0, 1] \rightarrow [0, 1] \quad (30)$$

$$x \mapsto \begin{cases} (1-x)^{b-1} & \in [(1-t)^{b-1}, 1] \text{ for } x \leq t \\ \left(\frac{x}{t}\right)^{a-1} & \in [t^{1-a}, 1] \text{ for } x \geq t \end{cases} \quad (31)$$

To derive $u_{\min,\max}$ from $x_{\min,\max}$ we can use ϕ^{-1} :

$$\phi^{-1} : [0, 1] \rightarrow [0, 1] \quad (32)$$

$$x \mapsto \begin{cases} p \left(\frac{x}{t} \right)^a & < p \text{ for } x < t \\ p & = p \text{ for } x = t \\ 1 - (1 - p) \left(\frac{1-x}{1-t} \right)^b & > p \text{ for } x > t \end{cases} \quad (33)$$

We start with u_{\min} . For efficiency, we handle the most common cases (small x_{\min}) first:

85b *⟨Set up girceb parameters 84d⟩+≡* (84b) *◀84d 86a▶*
 $\text{if } (xmin \leq 0d0) \text{ then}$
 $\text{umin} = 0d0$
 $\text{elseif } (xmin < t) \text{ then}$
 $\text{umin} = p * (xmin/t)^{**a}$
 $\text{elseif } (xmin \text{ .eq. } t) \text{ then}$
 $\text{umin} = p$
 $\text{elseif } (xmin < 1d0) \text{ then}$
 $\text{umin} = 1d0 - (1d0 - p) * ((1d0 - xmin)/(1d0 - t))^{**b}$
 else
 $\text{umin} = 1d0$
 endif

Same procedure for u_{\max} ; again, handle the most common cases (large x_{\max}) first:

```
86a  ⟨Set up girceb parameters 84d⟩+≡                                (84b) ▷85b 86b▷
      if (xmax .ge. 1d0) then
          umax = 1d0
      elseif (xmax .gt. t) then
          umax = 1d0 - (1d0 - p) * ((1d0 - xmax)/(1d0 - t))**b
      elseif (xmax .eq. t) then
          umax = p
      elseif (xmax .gt. 0d0) then
          umax = p * (xmax/t)**a
      else
          umax = 0d0
      endif
```

Check for absurd cases.

```
86b  ⟨Set up girceb parameters 84d⟩+≡                                (84b) ▷86a
      if (umax .lt. umin) then
          girceb = -1d0
          return
      endif
```

Uses `girceb` 84b.

It remains to choose the best value for t . The rejection efficiency ϵ of the algorithm is given by the ratio of the dominating distribution and the distribution

$$\frac{1}{\epsilon(t)} = \frac{B(a, b)}{ab} (bt^a + at^{a-1}(1-t)^b). \quad (34)$$

It is maximized for

$$bt - bt(1-t)^{b-1} + (a-1)(1-t)^b = 0 \quad (35)$$

This equation has a solution which can be determined numerically. While this determination is far too expensive compared to a moderate loss in efficiency, we could perform it once after fitting the coefficients a, b . Nevertheless, it has been shown,[18] that

$$t = \frac{1-a}{b+1-a} \quad (36)$$

results in non-vanishing efficiency for all values $1 < a \leq 1 \leq b$. Empirically we have found efficiencies of at least 80% for this choice, which is enough for our needs.

```
86c  ⟨Set up best value for t 86c⟩+≡                                (84d)
      t = (1d0 - a) / (b + 1d0 - a)
```

```
86d  ⟨Public subroutines 31a⟩+≡                                (30b) ▷84a
      public :: circem
      Uses circem 86e.
```

```
86e  ⟨Module subroutines 31b⟩+≡                                (30b) ▷84b
      subroutine circem (errlvl, errmsg)
          character(len=*) :: errlvl, errmsg
          integer, save :: errcnt = 0
```

```

if (errlvl .eq. 'MESSAGE') then
    print *, 'circe1:message: ', errmsg
else if (errlvl .eq. 'WARNING') then
    if (errcnt .lt. 100) then
        errcnt = errcnt + 1
        print *, 'circe1:warning: ', errmsg
    else if (errcnt .eq. 100) then
        errcnt = errcnt + 1
        print *, 'circe1:message: more than 100 messages'
        print *, 'circe1:message: turning warnings off'
    end if
else if (errlvl .eq. 'ERROR') then
    if (errcnt .lt. 200) then
        errcnt = errcnt + 1
        print *, 'circe1:error: ', errmsg
    else if (errcnt .eq. 200) then
        errcnt = errcnt + 1
        print *, 'circe1:message: more than 200 messages'
        print *, 'circe1:message: turning error messages off'
    endif
else if (errlvl .eq. 'PANIC') then
    if (errcnt .lt. 300) then
        errcnt = errcnt + 1
        print *, 'circe1:panic: ', errmsg
    else if (errcnt .eq. 300) then
        errcnt = errcnt + 1
        print *, 'circe1:message: more than 300 messages'
        print *, 'circe1:message: turning panic messages off'
    end if
else
    print *, 'circe1:panic: invalid error code ', errlvl
end if
end subroutine circem

```

Defines:

`circem`, used in chunks 32–34, 36–39, 50, 51a, 53–57, 61, 63, 65a, 68, 69, 79b, 84c, and 86d.

6.7 Examples

6.7.1 Distributions

```

87 <circe1_plot.f90 87>≡
program circe1_plot
use kinds
use circe1

implicit none

real(kind=double) :: xmin, xmax, y, roots

```

```

integer :: xory, nstep, p1, p2, acc, ver, rev, i
real(kind=double) :: x, logx, d
read *, xory, xmin, xmax, nstep, y, p1, p2, roots, acc, ver, rev
call circles (0d0, 0d0, roots, acc, ver, rev, 0)
do i = 0, nstep
    logx = log (xmin) + i * log (xmax/xmin) / nstep
    x = exp (logx)
    d = 0d0
    if (xory .eq. 1) then
        if (p1 .eq. C1_PHOTON) then
            d = circe (x, y, p1, p2)
        else
            d = circe (1d0 - x, y, p1, p2)
        end if
    else if (xory .eq. 2) then
        if (p1 .eq. C1_PHOTON) then
            d = circe (y, x, p1, p2)
        else
            d = circe (y, 1d0 - x, p1, p2)
        end if
    end if
    if (d .gt. 1d-4) print *, x, d
end do
end program circe1_plot

```

Uses **C1_PHOTON** 11b, **circe** 31b, and **circles** 32a.

6.7.2 Library functions

If Fortran77 only had first class functions, then the following cruft would not be necessary. OK, here's the outline of the adaptive Gauss integration routine from CERNLIB:

88 *(Part one of Gaussian integration 88)* (89 90)

```

real(kind=double) :: f, a, b, eps
external f
real(kind=double), parameter :: Z1 = 1, HF = Z1/2, CST = 5*Z1/1000
integer :: i
real(kind=double) :: h, const, aa, bb, c1, c2, s8, s16, u
(Gaussian weights 91a)
h = 0
if (b .eq. a) go to 99
const = CST / dabs(b-a)
bb = a
1 continue
    aa = bb
    bb = b
2 continue
    c1 = HF*(bb+aa)
    c2 = HF*(bb-aa)
    s8 = 0

```

```

do i = 1, 4
u = c2*x(i)

```

Here are now the first two function calls that we have to fill in later in various ways:

89a *<Function call stub 89a>* \equiv 89c \triangleright
 $s8 = s8 + w(i) * (f(c1+u) + f(c1-u))$

Continuing

89b *<Part two of Gaussian integration 89b>* \equiv (89 90)
end do
s16 = 0
do i = 5, 12
u = c2*x(i)

And here are the other two function calls:

89c *<Function call stub 89a>* \equiv 89a
 $s16 = s16 + w(i) * (f(c1+u) + f(c1-u))$

Terminating:

89d *<Part three of Gaussian integration 89d>* \equiv (89 90)
end do
s16 = c2*s16
if (dabs(s16-c2*s8) .le. eps*(1+dabs(s16))) then
h = h + s16
if (bb .ne. b) go to 1
else
bb = c1
if (1 + const*dabs(c2) .ne. 1) go to 2
h = 0
print *, 'gauss: too high accuracy required'
go to 99
end if
99 continue

This one is still reasonably straightforward

$$\text{gauss1} : (f, a, b) \mapsto \int_a^b dx f(x) \quad (37)$$

89e *<circe1_sample.f90: public 15a>* \equiv (17b) \triangleleft 21a 90a \triangleright
public :: gauss1

Uses gauss1 89f.

89f *<circe1_sample.f90: subroutines 15b>* \equiv (17b) \triangleleft 21b 90b \triangleright
function gauss1 (f, a, b, eps)
real(kind=double) :: gauss1
<Part one of Gaussian integration 88>
s8 = s8 + w(i) * (f(c1+u) + f(c1-u))
<Part two of Gaussian integration 89b>
s16 = s16 + w(i) * (f(c1+u) + f(c1-u))
<Part three of Gaussian integration 89d>
gauss1 = h
end function gauss1

Defines:

gauss1, used in chunks 15c and 89e.

But this almost identical repeat

$$\text{gaussx} : (f, a, b) \mapsto \left(y \mapsto \int_a^b dx f(y, x) \right) \quad (38)$$

would not be necessary in a modern programming language with currying:

90a `<circe1_sample.f90: public 15a>+≡` (17b) ▷89e 90c▷
 `public :: gaussx`
 Uses gaussx 90b.

90b `<circe1_sample.f90: subroutines 15b>+≡` (17b) ▷89f 90d▷
 `function gaussx (f, y, a, b, eps)`
 `real(kind=double) :: y`
 `real(kind=double) :: gaussx`
 (Part one of Gaussian integration 88)
 `s8 = s8 + w(i) * (f (y, c1+u) + f (y, c1-u))`
 (Part two of Gaussian integration 89b)
 `s16 = s16 + w(i) * (f (y, c1+u) + f (y, c1-u))`
 (Part three of Gaussian integration 89d)
 `gaussx = h`
 `end function gaussx`

Defines:

gaussx, used in chunk 90.

Fortunately, this is the last one we need

$$\text{gauss2} : (f, a, b, a_1, b_1) \mapsto \int_a^b dx \int_{a_1}^{b_1} dy f(x, y) \\ = \text{gauss1}(\text{gaussx}(f, a, b), a_1, b_1) \quad (39)$$

90c `<circe1_sample.f90: public 15a>+≡` (17b) ▷90a
 `public :: gauss2`
 Uses gauss2 90d.

90d `<circe1_sample.f90: subroutines 15b>+≡` (17b) ▷90b
 `function gauss2 (f, a, b, a1, b1, eps)`
 `real(kind=double) :: a1, b1`
 `real(kind=double) :: gauss2`
 (Part one of Gaussian integration 88)
 `s8 = s8 + w(i) * (gaussx (f, c1+u, a1, b1, eps) &`
 `+ gaussx (f, c1-u, a1, b1, eps))`
 (Part two of Gaussian integration 89b)
 `s16 = s16 + w(i) * (gaussx (f, c1+u, a1, b1, eps) &`
 `+ gaussx (f, c1-u, a1, b1, eps))`
 (Part three of Gaussian integration 89d)
 `gauss2 = h`
 `end function gauss2`

Defines:

 gauss2, used in chunks 15c, 16e, and 90c.

Uses gaussx 90b.

91a \langle Gaussian weights 91a $\rangle \equiv$ (88)
real(kind=double), dimension(12), parameter :: &
 x = (/ 9.6028985649753623d-1, &
 7.9666647741362674d-1, &
 5.2553240991632899d-1, &
 1.8343464249564980d-1, &
 9.8940093499164993d-1, &
 9.4457502307323258d-1, &
 8.6563120238783174d-1, &
 7.5540440835500303d-1, &
 6.1787624440264375d-1, &
 4.5801677765722739d-1, &
 2.8160355077925891d-1, &
 9.5012509837637440d-2 /), &
 w = (/ 1.0122853629037626d-1, &
 2.2238103445337447d-1, &
 3.1370664587788729d-1, &
 3.6268378337836198d-1, &
 2.7152459411754095d-2, &
 6.2253523938647893d-2, &
 9.5158511682492785d-2, &
 1.2462897125553387d-1, &
 1.4959598881657673d-1, &
 1.6915651939500254d-1, &
 1.8260341504492359d-1, &
 1.8945061045506850d-1 /)

6.7.3 Generators

6.8 Dumping Parameters

91b \langle params.f90 91b $\rangle \equiv$ 92▷
program params
 use kinds
 use circe1

 implicit none
 integer :: acc, ver, i
 real(kind=double), dimension(7), parameter :: roots = &
 (/ 90D0, 170D0, 350D0, 500D0, 800D0, 1000D0, 1500D0 /)
 do ver = 7, 8
 print *, "VERSION ", ver
 do acc = TESLA, XBNDEE
 do 12 i = 1, 7
 print *, "======"

```

        call circles (0d0, 0d0, roots(i), acc, ver, 20020307, 0)
        call dump ()
    end do
end do
end do
end program params

```

Uses **circles** 32a, **TESLA** 13a, and **XBNDEE** 13a.

```

92  <params.f90 91b>+≡                                     ▷91b
    subroutine dump
        <Accelerator codes 13a>
        character(len=9) :: name
        select case (acc)
        case (SBAND)
            name = 'SBAND'
        case (TESLA)
            name = 'TESLA'
        case (JLCNLC)
            name = 'JLCNL'
        case (SBNDEE)
            name = 'SBAND/EE'
        case (TESLEE)
            name = 'TESLA/EE'
        case (XBNDEE)
            name = 'JLCNL/EE'
        case (ILC)
            name = 'ILC'
        case default
            print *, "Accelerator mode not recognized"
        end select
        write (*, 1000) name, circe1_params%roots
        write (*, 1001) 'e^+/e^-', circe1_params%lumi
        write (*, 1002) 'e^+/e^-', circe1_params%a1(0)
        write (*, 1003) 'e^+/e^-', 1 - circe1_params%a1(0)
        write (*, 1004) 'e^+/e^-', circe1_params%a1(1), circe1_params%a1(2), circe1_params%a1(3)
        write (*, 1003) 'gamma', circe1_params%a1(7)
        write (*, 1004) 'gamma', circe1_params%a1(4), circe1_params%a1(5), circe1_params%a1(6)
        1000 format (A9, '@', F5.0, ' GeV')
        1001 format (4X, A7, ' lumi          = ', F7.2, ' * 10^32 cm^-2 sec^-1')
        1002 format (4X, A7, ' delta strength = ', F9.5)
        1003 format (4X, A7, ' integral(cont.) = ', F9.5)
        1004 format (4X, A7, ' distribution   = ', F9.5, ' * x^{', F9.5, '} * (1-x)^{', F9.5,
    end subroutine dump

```

Uses **ILC** 13a, **JLCNL** 13a, **SBAND** 13a, **SBNDEE** 13a, **TESLA** 13a, **TESLEE** 13a, and **XBNDEE** 13a.

7 Fitting

7.1 Version 1: Factorized Beta Distributions

```
93a  <Copyleft notice 29b>+≡          (17b 29a 93b 110b 115d) ▷29b
!
! Copyright (C) 1999-2020 by
! Wolfgang Kilian <kilian@physik.uni-siegen.de>
! Thorsten Ohl <ohl@physik.uni-wuerzburg.de>
! Juergen Reuter <juergen.reuter@desy.de>
! Christian Speckner <cnspeckn@googlemail.com>
!
! WHIZARD is free software; you can redistribute it and/or modify it
! under the terms of the GNU General Public License as published by
! the Free Software Foundation; either version 2, or (at your option)
! any later version.
!
! WHIZARD is distributed in the hope that it will be useful, but
! WITHOUT ANY WARRANTY; without even the implied warranty of
! MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
! GNU General Public License for more details.
!
! You should have received a copy of the GNU General Public License
! along with this program; if not, write to the Free Software
! Foundation, Inc., 675 Mass Ave, Cambridge, MA 02139, USA.
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
! This file has been stripped of most comments. For documentation, refer
! to the source 'minuit.nw'

93b  <circe1_fit.f90 93b>≡
    ! circe1_fit.f90 -- fitting for circe
    <Copyleft notice 29b>

module fit_routines
    use kinds

    implicit none
    private

<circe1_fit.f90: public 95a>

contains
<circe1_fit.f90: subroutines 95b>
end module fit_routines

program fit
    use kinds
    use fit_routines

    implicit none

    integer :: i, rcode
```

```

⟨Declare NPARAM 94a⟩
⟨Declare parameters 94b⟩
⟨Declare arguments 94c⟩

⟨Initialize parameters for circe1_fit.f90 94e⟩
call mninit (5, 6, 7)
⟨Load parameters 94d⟩
call mnseti ('CIRCE: fit version 1      ')
argv(1) = 1
call mnexcm (fct, 'SET PRINTOUT      ', argv, 1, rcode, 0d0)
argv(1) = 1
call mnexcm (fct, 'CALL FCT          ', argv, 1, rcode, 0d0)
call mnexcm (fct, 'MIGRAD           ', argv, 0, rcode, 0d0)
call mnexcm (fct, 'MINOS            ', argv, 0, rcode, 0d0)
argv(1) = 3
call mnexcm (fct, 'CALL FCT          ', argv, 1, rcode, 0d0)
call mnexcm (fct, 'STOP             ', argv, 0, rcode, 0d0)

end program fit

```

Defines:

fit, used in chunks 94d, 111, and 115c.

Uses **circe** 31b and **fct** 95b 111c.

- 94a ⟨Declare NPARAM 94a⟩≡ (93b 101b)
- ```
integer, parameter :: NPARAM = 6
```
- Defines:
- NPARAM**, used in chunks 94 and 101b.
- 94b ⟨Declare parameters 94b⟩≡ (93b)
- ```
integer, dimension(NPARAM) :: pnum
character(len=10), dimension(NPARAM) :: pname
real(kind=double), dimension(NPARAM) :: pstart, pstep
```
- Uses **NPARAM** 94a.
- 94c ⟨Declare arguments 94c⟩≡ (93b)
- ```
integer, parameter :: ARG C = 10
real(kind=double), dimension(ARG C) :: argv
```
- 94d ⟨Load parameters 94d⟩≡ (93b)
- ```
do i = 1, NPARAM
    call mnparm (pnum(i), pname(i), pstart(i), pstep (i), 0d0, 0d0, rcode)
    if (rcode .ne. 0) then
        print *, "fit: MINUIT won't accept parameter ", pnum(i)
        stop
    endif
end do
```
- Uses **fit** 93b and **NPARAM** 94a.
- 94e ⟨Initialize parameters for circe1_fit.f90 94e⟩≡ (93b)
- ```
data pnum / 1, 2, 3, 4, 5, 6 /
data pname / '1_e', 'x_e', '1-x_e', '1_g', 'x_g', '1-x_g' /
data pstart / -1.00, 20.00, 0.20, -1.00, 0.20, 20.00 /
data pstep / 0.01, 0.01, 0.01, 0.01, 0.01, 0.01 /
```

```

95a <circe1_fit.f90: public 95a>≡ (93b) 95f▷
 public :: fct
 Uses fct 95b 111c.

95b <circe1_fit.f90: subroutines 95b>≡ (93b) 96a▷
 subroutine fct (nx, df, f, a, mode, g)
 integer :: nx, mode
 real(kind=double) :: f, g
 real(kind=double), dimension(:) :: df, a
 <Local variables for fct (v1) 95e>
 if (mode .eq. 1) then
 <Read input data (v1) 95c>
 else if (mode .eq. 2) then
 <Calculate ∇f 99a>
 end if
 <Calculate f (v1) 99b>
 end if
 if (mode .eq. 3) then
 <Write output (v1) 101a>
 end if
 end subroutine fct

 Defines:
 fct, used in chunks 93b, 95a, 110, 111, and 115f.

95c <Read input data (v1) 95c>≡ (95b)
 <Read data from file 95d>
 <Fixup errors 97a>
 <Normalize 97d>

95d <Read data from file 95d>≡ (95c)
 call gethst ('ee', NDATA, xee, fee, see, tee, pwr)
 call gethst ('eg', NDATA, xeg, feg, dfeg, seg, teg, pwr)
 call gethst ('ge', NDATA, xge, fge, dfge, sge, tge, pwr)
 call gethst ('gg', NDATA, xgg, fgg, dfgg, sgg, tgg, pwr)

 Uses gethst 96a.

95e <Local variables for fct (v1) 95e>≡ (95b) 99c▷
 integer, parameter :: NDATA = 20
 real(kind=double) :: see, tee, dtee
 real(kind=double) :: seg, teg, dtseg
 real(kind=double) :: sge, tge, dtgge
 real(kind=double) :: sgg, tgg, dtgg
 real(kind=double), dimension(2,0:NDATA+1,0:NDATA+1) :: xee, xeg, &
 xge, xgg
 real(kind=double), dimension(0:NDATA+1,0:NDATA+1) :: fee, dfee, &
 feg, dfeg, fge, dfge, fgg, dfgg
 real(kind=double) :: pwr

95f <circe1_fit.f90: public 95a>+≡ (93b) ▷ 95a 97b▷
 public :: gethst
 Uses gethst 96a.

```

```

96a <circe1.fit.f90: subroutines 95b>+≡ (93b) <95b 97c>
 subroutine gethst (tag, ndata, x, f, df, s, t, pwr)
 character(len=2) :: tag
 integer :: ndata
 real(kind=double) :: s, t, pwr
 real(kind=double), dimension(2,0:ndata+1,0:ndata+1) :: x
 real(kind=double), dimension(0:ndata+1,0:ndata+1) :: f, df
 integer :: i, j
 open (10, file = 'lumidiff-'//tag//'.dat')
 read (10, *) pwr
 s = 0d0
 <Read continuum, summing in s 96b>
 t = s
 <Read single δ, summing in t 96c>
 <Read double δ, summing in t 96e>
 close (10)
 end subroutine gethst

```

Defines:

gethst, used in chunk 95.

```

96b <Read continuum, summing in s 96b>≡ (96a)
 do i = 1, ndata
 do j = 1, ndata
 read (10, *) x(1,i,j), x(2,i,j), f(i,j), df(i,j)
 s = s + f(i,j)
 end do
 end do

96c <Read single δ, summing in t 96c>≡ (96a) 96d▷
 do i = 1, ndata
 read (10, *) x(1,i,0), f(i,0), df(i,0), &
 f(i,ndata+1), df(i,ndata+1)
 x(1,i,ndata+1) = x(1,i,0)
 t = t + f(i,0) + f(i,ndata+1)
 end do

96d <Read single δ, summing in t 96c>+≡ (96a) <96c
 do i = 1, ndata
 read (10, *) x(2,0,i), f(0,i), df(0,i), &
 f(ndata+1,i), df(ndata+1,i)
 x(2,ndata+1,i) = x(2,0,i)
 t = t + f(0,i) + f(ndata+1,i)
 end do

96e <Read double δ, summing in t 96e>≡ (96a)
 read (10, *) f(0,0), df(0,0), f(0,ndata+1), df(0,ndata+1)
 t = t + f(0,0) + f(0,ndata+1)
 read (10, *) f(ndata+1,0), df(ndata+1,0), &
 f(ndata+1,ndata+1), df(ndata+1,ndata+1)
 t = t + f(ndata+1,0) + f(ndata+1,ndata+1)

```

Guinea-Pig does not provide the full error. A Monte Carlo study shows that it is a reasonable approximation to rescale the bin error by suitable factors. These factors are different for each distribution and the factors for the  $\delta$ -pieces are bigger than those for the continuum parts. The follows factors are for the `slow` parameter set.

```

97a <Fixup errors 97a>≡ (95c)
 call fixerr (NDATA, dfee, 20d0, 30d0, 40d0)
 call fixerr (NDATA, dfeg, 15d0, 20d0, 0d0)
 call fixerr (NDATA, dfge, 15d0, 20d0, 0d0)
 call fixerr (NDATA, dfgg, 10d0, 0d0, 0d0)

 Uses fixerr 97c.

97b <circe1_fit.f90: public 95a>+≡ (93b) ▷95f 98a▷
 public :: fixerr
 Uses fixerr 97c.

97c <circe1_fit.f90: subroutines 95b>+≡ (93b) ▷96a 98b▷
 subroutine fixerr (ndata, df, c, sd, dd)
 integer :: ndata
 real(kind=double) :: c, sd, dd
 real(kind=double), dimension(0:ndata+1,0:ndata+1) :: df
 integer :: i, j
 do i = 1, NDATA
 do j = 1, NDATA
 df(i,j) = c * df(i,j)
 end do
 end do
 do i = 1, NDATA
 df(0,i) = sd * df(0,i)
 df(i,0) = sd * df(i,0)
 df(ndata+1,i) = sd * df(ndata+1,i)
 df(i,ndata+1) = sd * df(i,ndata+1)
 end do
 df(0,0) = dd * df(0,0)
 df(ndata+1,0) = dd * df(ndata+1,0)
 df(0,ndata+1) = dd * df(0,ndata+1)
 df(ndata+1,ndata+1) = dd * df(ndata+1,ndata+1)
 end subroutine fixerr

```

Defines:

`fixerr`, used in chunk 97.

The error on the integrated luminosity is obtained from adding the error in channels in quadrature.

```

97d <Normalize 97d>≡ (95c) 98c▷
 dtee = sumsqu (NDATA, dfee)
 dtcg = sumsqu (NDATA, dfeg)
 dtge = sumsqu (NDATA, dfge)
 dtgg = sumsqu (NDATA, dfgg)

 Uses sumsqu 98b.

```

```

98a <circe1.fit.f90: public 95a>+≡ (93b) <97b 98d>
 public :: sumsqu
 Uses sumsqu 98b.

98b <circe1.fit.f90: subroutines 95b>+≡ (93b) <97c 98e>
 function sumsqu (ndata, f)
 integer :: ndata
 real(kind=double) :: sumsqu
 real(kind=double), dimension(0:ndata+1,0:ndata+1) :: f
 integer :: i, j
 real(kind=double) :: s2
 s2 = 0
 do i = 0, NDATA+1
 do j = 0, NDATA+1
 s2 = s2 + f(i,j)*f(i,j)
 end do
 end do
 sumsqu = sqrt (s2)
 end function sumsqu

```

Defines:

sumsqu, used in chunks 97d and 98a.

```

98c <Normalize 97d>+≡ (95c) <97d
 call scale (NDATA, 1d0/tee, fee)
 call scale (NDATA, 1d0/tee, dfee)
 call scale (NDATA, 1d0/tee, feg)
 call scale (NDATA, 1d0/tee, dfeg)
 call scale (NDATA, 1d0/tee, fge)
 call scale (NDATA, 1d0/tee, dfge)
 call scale (NDATA, 1d0/tee, fgg)
 call scale (NDATA, 1d0/tee, dfgg)
 Uses scale 98e.

98d <circe1.fit.f90: public 95a>+≡ (93b) <98a 100b>
 public :: scale
 Uses scale 98e.

98e <circe1.fit.f90: subroutines 95b>+≡ (93b) <98b 100c>
 subroutine scale (ndata, s, f)
 integer :: ndata
 real(kind=double) :: s
 real(kind=double), dimension(0:ndata+1,0:ndata+1) :: f
 integer :: i, j
 do i = 0, NDATA+1
 do j = 0, NDATA+1
 f(i,j) = s * f(i,j)
 end do
 end do
 end subroutine scale

```

Defines:

scale, used in chunk 98.

```

99a <Calculate ∇f 99a>≡ (95b 111c)
 print *, "ERROR: $\\nabla f$ n.a."
 stop

Log-likelihood won't fly, because we can't normalize the likelihood function for
an unbounded parameter range. Let's use good ole least-squares instead.

99b <Calculate f (v1) 99b>≡ (95b) 99d▷
 f = 0d0
 do i = 1, NDATA
 do j = 1, NDATA
 if (dfee(i,j) .gt. 0d0) then
 f = f + ((phie(xee(1,i,j),a) * phie(xee(2,i,j),a) &
 - fee(i,j)) / dfee(i,j))**2
 end if
 if (dfeg(i,j) .gt. 0d0) then
 f = f + ((phie(xeg(1,i,j),a) * phig(xeg(2,i,j),a) &
 - feg(i,j)) / dfeg(i,j))**2
 end if
 if (dfge(i,j) .gt. 0d0) then
 f = f + ((phig(xge(1,i,j),a) * phie(xge(2,i,j),a) &
 - fge(i,j)) / dfge(i,j))**2
 end if
 if (dfgg(i,j) .gt. 0d0) then
 f = f + ((phig(xgg(1,i,j),a) * phig(xgg(2,i,j),a) &
 - fgg(i,j)) / dfgg(i,j))**2
 end if
 end do
 end do
 Uses phie 100c and phig 100e.

99c <Local variables for fct (v1) 95e>+≡ (95b) ▷95e 101b▷
 integer :: i, j
 real(kind=double) :: delta

99d <Calculate f (v1) 99b>+≡ (95b) ▷99b 99f▷
 if ((a(2) .le. -1d0) .or. (a(3) .le. -1d0/pwr)) then
 print *, "warning: discarding out-of-range a2/3: ", a(2), a(3)
 <Give up on f 99e>
 else
 delta = 1d0 - exp(a(1)) * beta(a(2)+1d0,a(3)+1d0/pwr) * dble(NDATA) / pwr
 if (delta .lt. 0d0) then
 print *, "warnimg: delta forced to 0 from ", delta
 delta = 0d0
 end if
 end if
 Uses beta 105.

99e <Give up on f 99e>≡ (99d)
 f = 1d100

99f <Calculate f (v1) 99b>+≡ (95b) ▷99d 100a▷
 do i = 1, NDATA
 if (dfee(ndata+1,i) .gt. 0d0) then

```

```

f = f + ((delta*phie(xee(2,ndata+1,i),a) &
 - fee(ndata+1,i)) / dfee(ndata+1,i))**2
end if
if (dfeg(ndata+1,i) .gt. 0d0) then
 f = f + ((delta*phig(xeg(2,ndata+1,i),a) &
 - feg(ndata+1,i)) / dfeg(ndata+1,i))**2
end if
if (dfee(i,ndata+1) .gt. 0d0) then
 f = f + ((delta*phie(xee(1,i,ndata+1),a) &
 - fee(i,ndata+1)) / dfee(i,ndata+1))**2
end if
if (dfge(i,ndata+1) .gt. 0d0) then
 f = f + ((delta*phig(xge(1,i,ndata+1),a) &
 - fge(i,ndata+1)) / dfge(i,ndata+1))**2
end if
end do

```

Uses **phie** 100c and **phig** 100e.

```

100a <Calculate f (v1) 99b>+≡ (95b) ▷99f
 if (dfee(ndata+1,ndata+1) .gt. 0d0) then
 f = f + ((delta*delta &
 - fee(ndata+1,ndata+1)) / dfee(ndata+1,ndata+1))**2
 end if

100b <circe1_fit.f90: public 95a>+≡ (93b) ▷98d 100d▷
 public :: phie
Uses phie 100c.

100c <circe1_fit.f90: subroutines 95b>+≡ (93b) ▷98e 100e▷
 function phie (x, a)
 real(kind=double) :: x, phie
 real(kind=double), dimension(6) :: a
 phie = exp (a(1) + a(2)*log(x) + a(3)*log(1d0-x))
 end function phie

```

Defines:

**phie**, used in chunks 99, 100b, and 103a.

```

100d <circe1_fit.f90: public 95a>+≡ (93b) ▷100b 103c▷
 public :: phig
Uses phig 100e.

100e <circe1_fit.f90: subroutines 95b>+≡ (93b) ▷100c 103d▷
 function phig (x, a)
 real(kind=double) :: x, phig
 real(kind=double), dimension(6) :: a
 phig = exp (a(4) + a(5)*log(x) + a(6)*log(1d0-x))
 end function phig

```

Defines:

**phig**, used in chunks 99, 100d, and 103a.

```

101a <Write output (v1) 101a>≡ (95b) 101c>
 a1(1) = exp(a(1)) * dble(NDATA) / pwr
 a1(2) = a(2)
 a1(3) = a(3) - 1d0 + 1d0/pwr
 a1(4) = exp(a(4)) * dble(NDATA) / pwr
 a1(5) = a(5) - 1d0 + 1d0/pwr
 a1(6) = a(6)
 open (10, file = 'Parameters')
 write (10, 1000) REV, tee / 1D32
 write (10, 1001) REV, &
 1d0 - a1(1) * beta(a1(2)+1d0,a1(3)+1d0), &
 a1(1), a1(2), a1(3), a1(4), a1(5), a1(6), &
 a1(4) * beta(a1(5)+1d0,a1(6)+1d0)
 1000 format (' data xa5lum(@ENERGY@,@ACC@, , I2, ') / ', E12.5, ')'
 1001 format (' data (xa5(i,@ENERGY@,@ACC@, , I2 ,'), i=0,7) /', /, &
 ', $ ', 4(E12.5, ', '), /, &
 ', $ ', 3(E12.5, ', '), E12.5, ')'
 close (10)

```

Uses **beta** 105.

```

101b <Local variables for fct (v1) 95e>+≡ (95b) ▷99c 102a▷
 <Declare NPARAM 94a>
 real(kind=double), dimension(NPARAM) :: a1
 integer, parameter :: REV = 1

```

Uses **NPARAM** 94a.

The average elektron energy in the continuum can be calculated analytically:

$$\langle E_{e^\pm} \rangle_{\text{cont}} = E_{\text{beam}} \langle x_{e^\pm} \rangle_{\text{cont}} = E_{\text{beam}} \frac{\int dx x^{a_2} (1-x)^{a_3} x}{B(a_2, a_3)} \\ = E_{\text{beam}} \frac{B(a_2 + 1, a_3)}{B(a_2, a_3)} = E_{\text{beam}} \frac{a_2 + 1}{a_2 + a_3 + 2} \quad (40)$$

```

101c <Write output (v1) 101a>+≡ (95b) ▷101a 101d▷
 delta = 1d0 - a1(1) * beta(a1(2)+1d0,a1(3)+1d0)
 print *, '< x_e > = ', delta + (1d0-delta)*(a1(2)+1d0)/(a1(2)+a1(3)+2d0)

```

Uses **beta** 105.

similarly:

$$\langle E_\gamma \rangle = E_{\text{beam}} \frac{a_5 + 1}{a_5 + a_6 + 2} \quad (41)$$

```

101d <Write output (v1) 101a>+≡ (95b) ▷101c 101e▷
 print *, '< x_g > = ', (a1(5)+1d0)/(a1(5)+a1(6)+2d0)

```

Count the degrees of freedom in **ndof**:

```

101e <Write output (v1) 101a>+≡ (95b) ▷101d 102b▷
 ndof = 0
 do i = 0, ndata+1
 do j = 0, ndata+1
 if (dfee(i,j) .gt. 0d0) ndof = ndof + 1
 if (dfeg(i,j) .gt. 0d0) ndof = ndof + 1
 if (dfge(i,j) .gt. 0d0) ndof = ndof + 1

```

```

 if (dfgg(i,j) .gt. 0d0) ndof = ndof + 1
 end do
end do
print *, 'CHI2 = ', f / ndof
102a <Local variables for fct (v1) 95e>+≡ (95b) ◁101b 102d▷
 integer :: ndof

```

The error on the luminosity is just the (possibly rescaled) counting error:

```

102b <Write output (v1) 101a>+≡ (95b) ◁101e 102c▷
 open (10, file = 'Errors.tex')
 write (10, 1099) tee / 1d32, dtee / 1d32, dtee / 1d32
 1099 format ('$', F8.2, '_{-', F4.2, '}^{+', F4.2, '}$')

```

After retrieving the error from MINUIT, we have to take care of the mapping of the parameters

$$a'_{1/4} = e^{a_{1/4}} B(a_{2/5} + 1, a_{3/6} + 1) N_{\text{bins}} \eta^{-1} \implies \delta a'_{1/4} = a'_{1/4} \delta a_{1/4} \quad (42)$$

ignoring the errors in the integral (i.e. the Beta function).

```

102c <Write output (v1) 101a>+≡ (95b) ◁102b 102e▷
 call mnerrs (1, eplus, eminus, epara, corr)
 ab = a1(1) * beta(a1(2)+1d0, a1(3)+1d0)
 write (10, 1100) ab, abs (ab*eminus), abs (ab*eplus)
 1100 format ('$', F8.4, '_{-', F6.4, '}^{+', F6.4, '}$')

```

Uses `beta` 105.

```

102d <Local variables for fct (v1) 95e>+≡ (95b) ◁102a 102f▷
 real(kind=double) :: ab

```

The other mappings are even more trivial:

$$a'_{2/6} = a_{2/6} - 1 + \eta^{-1} \implies \delta a'_{2/6} = \delta a_{2/6} \quad a'_{3/5} = a_{3/5} - 1 + \eta^{-1} \implies \delta a'_{3/5} = \delta a_{3/5} \quad (43)$$

```

102e <Write output (v1) 101a>+≡ (95b) ◁102c 103a▷
 do i = 2, 3
 call mnerrs (i, eplus, eminus, epara, corr)
 write (10, 1100) a1(i), abs (eminus), abs (eplus)
 end do
 call mnerrs (4, eplus, eminus, epara, corr)
 ab = a1(4) * beta(a1(5)+1d0, a1(6)+1d0)
 write (10, 1100) ab, abs (ab*eminus), abs (ab*eplus)
 do i = 5, 6
 call mnerrs (i, eplus, eminus, epara, corr)
 write (10, 1100) a1(i), abs (eminus), abs (eplus)
 end do
 close (10)

```

Uses `beta` 105.

```

102f <Local variables for fct (v1) 95e>+≡ (95b) ◁102d▷
 real(kind=double) :: eplus, eminus, epara, corr
 integer :: n

```

```

103a <Write output (v1) 101a>+≡ (95b) ◁102e 103b>
 do n = 1, 10
 call pslice ('ee', 'x', n, NDATA, xee, fee, dfee, phie, phie, a)
 call pslice ('eg', 'x', n, NDATA, xeg, feg, dfeg, phie, phig, a)
 call pslice ('ge', 'x', n, NDATA, xge, fge, dfge, phig, phie, a)
 call pslice ('gg', 'x', n, NDATA, xgg, fgg, dfgg, phig, phig, a)
 call pslice ('ee', 'y', n, NDATA, xee, fee, dfee, phie, phie, a)
 call pslice ('eg', 'y', n, NDATA, xeg, feg, dfeg, phie, phig, a)
 call pslice ('ge', 'y', n, NDATA, xge, fge, dfge, phig, phie, a)
 call pslice ('gg', 'y', n, NDATA, xgg, fgg, dfgg, phig, phig, a)
 end do
 call pslice ('ee', 'x', 21, NDATA, xee, fee, dfee, phie, phie, a)
 call pslice ('eg', 'x', 21, NDATA, xeg, feg, dfeg, phie, phig, a)
 call pslice ('ee', 'y', 21, NDATA, xee, fee, dfee, phie, phie, a)
 call pslice ('ge', 'y', 21, NDATA, xge, fge, dfge, phig, phie, a)

```

Uses phie 100c, phig 100e, and pslice 103d.

UNIX Fortran compiler want backslashes escaped:

```

103b <Write output (v1) 101a>+≡ (95b) ◁103a
 open (10, file = 'Slices.mp4')
 write (10,*) "picture eslice[], gslice[] ;"
 do n = 1, NDATA
 write (10,*) 'eslice[, n, :] := ', &
 'btex $x_{e^{\backslash pm}} = ', xee(1,n,1), '$ etex;'
 write (10,*) 'gslice[, n, :] := ', &
 'btex $x_{\gamma} = ', xgg(1,n,1), '$ etex;'
 end do
 close (10)

103c <circe1.fit.f90: public 95a>+≡ (93b) ◁100d
 public :: pslice
 Uses pslice 103d.

103d <circe1.fit.f90: subroutines 95b>+≡ (93b) ◁100e 105>
 subroutine pslice (pp, xy, n, ndata, x, f, df, phi1, phi2, a)
 character(len=2) :: pp
 character(len=1) :: xy
 integer :: n, ndata
 real(kind=double), dimension(2,0:ndata+1,0:ndata+1) :: x
 real(kind=double), dimension(0:ndata+1,0:ndata+1) :: f, df
 real(kind=double), dimension(6) :: a
 real(kind=double) :: z
 real(kind=double) :: phi1, phi2, d, delta, pwr
 external phi1, phi2
 integer :: i
 character(len=2) digits
 write (digits, '(I2.2)') n
 open (10, file = 'lumidiff-'//pp//xy//digits//'.dat')
 open (11, file = 'lumidiff-'//pp//xy//digits//'.fit')
 open (12, file = 'lumidiff-'//pp//xy//digits//'.chi')
 if (n .eq. ndata+1) then

```

```

pwr = 5d0
delta = 1d0 - exp(a(1))*beta(a(2)+1d0,a(3)+1d0/pwr) &
 * dble(NDATA) / pwr
else
 delta = 0
end if
if (xy .eq. 'x') then
 do i = 1, ndata
 if (df(n,i) .gt. 0d0) then
 if (pp(2:2) .eq. 'g') then
 z = x(2,n,i)
 else
 z = 1d0 - x(2,n,i)
 endif
 if (n .eq. ndata+1) then
 d = delta*phi2(x(2,n,i),a)
 else
 d = phi1(x(1,n,i),a)*phi2(x(2,n,i),a)
 endif
 write (10,*) z, f(n,i), df(n,i)
 write (11,*) z, d
 write (12,*) z, (f(n,i) - d) / df(n,i)
 endif
 end do
else if (xy .eq. 'y') then
 do i = 1, ndata
 if (df(i,n) .gt. 0d0) then
 if (pp(1:1) .eq. 'g') then
 z = x(1,i,n)
 else
 z = 1d0 - x(1,i,n)
 endif
 if (n .eq. ndata+1) then
 d = phi1(x(1,i,n),a)*delta
 else
 d = phi1(x(1,i,n),a)*phi2(x(2,i,n),a)
 endif
 write (10,*) z, f(i,n), df(i,n)
 write (11,*) z, d
 write (12,*) z, (f(i,n) - d) / df(i,n)
 endif
 end do
endif
close (10)
close (11)
close (12)
end subroutine pslice

```

Defines:

**pslice**, used in chunk 103.

Uses **beta** 105.

```
105 <circe1_fit.f90: subroutines 95b>+≡ (93b) ↳103d
 function beta (a, b)
 real(kind=double) :: a, b, beta
 beta = exp (dlgama(a) + dlgama(b) - dlgama(a+b))
 contains
 function dlgama (x)
 real(kind=double) :: dlgama
 real(kind=double), dimension(7) :: p1, q1, p2, q2, p3, q3
 real(kind=double), dimension(5) :: c, xl
 real(kind=double) :: x, y, zero, one, two, half, ap, aq
 integer :: i
 data ZERO /0.0D0/, ONE /1.0D0/, TWO /2.0D0/, HALF /0.5D0/
 data XL /0.0D0, 0.5D0, 1.5D0, 4.0D0, 12.0D0/
 data p1 /+3.8428736567460D+0, +5.2706893753010D+1, &
 +5.5584045723515D+1, -2.1513513573726D+2, &
 -2.4587261722292D+2, -5.7500893603041D+1, &
 -2.3359098949513D+0/
 data q1 /+1.00000000000000D+0, +3.3733047907071D+1, &
 +1.9387784034377D+2, +3.0882954973424D+2, &
 +1.5006839064891D+2, +2.0106851344334D+1, &
 +4.5717420282503D-1/
 data p2 /+4.8740201396839D+0, +2.4884525168574D+2, &
 +2.1797366058896D+3, +3.7975124011525D+3, &
 -1.9778070769842D+3, -3.6929834005591D+3, &
 -5.60177735373804D+2/
 data q2 /+1.00000000000000D+0, +9.5099917418209D+1, &
 +1.5612045277929D+3, +7.2340087928948D+3, &
 +1.0459576594059D+4, +4.1699415153200D+3, &
 +2.7678583623804D+2/
 data p3 /-6.8806240094594D+3, -4.3069969819571D+5, &
 -4.7504594653440D+6, -2.9423445930322D+6, &
 +3.6321804931543D+7, -3.3567782814546D+6, &
 -2.4804369488286D+7/
 data q3 /+1.00000000000000D+0, -1.4216829839651D+3, &
 -1.5552890280854D+5, -3.4152517108011D+6, &
 -2.0969623255804D+7, -3.4544175093344D+7, &
 -9.1605582863713D+6/
 data c / 1.1224921356561D-1, 7.9591692961204D-2, &
 -1.7087794611020D-3, 9.1893853320467D-1, &
 1.3469905627879D+0/
 if (x .le. xl(1)) then
 print *, 'ERROR: DLGAMA non positive argument: ', x
 dlgama = zero
 end if
 if (x .le. xl(2)) then
 y = x + one
 ap = p1(1)
 aq = q1(1)
```

```

do i = 2, 7
 ap = p1(i) + y * ap
 aq = q1(i) + y * aq
end do
y = - log(x) + x * ap / aq
else if (x .le. xl(3)) then
 ap = p1(1)
 aq = q1(1)
 do i = 2, 7
 ap = p1(i) + x * ap
 aq = q1(i) + x * aq
 end do
 y = (x - one) * ap / aq
else if (x .le. xl(4)) then
 ap = p2(1)
 aq = q2(1)
 do i = 2, 7
 ap = p2(i) + x * ap
 aq = q2(i) + x * aq
 end do
 y = (x-two) * ap / aq
else if (x .le. xl(5)) then
 ap = p3(1)
 aq = q3(1)
 do i = 2, 7
 ap = p3(i) + x * ap
 aq = q3(i) + x * aq
 end do
 y = ap / aq
else
 y = one / x**2
 y = (x-half) * log(x) - x + c(4) + &
 (c(1) + y * (c(2) + y * c(3))) / ((c(5) + y) * x)
end if
dlgama = y
end function dlgama
end function beta

```

Defines:

`beta`, used in chunks 59b, 61d, 65c, 70b, 71e, 75a, 99d, 101–103, and 108b.

106 `<circe1.fit.sh 106>`≡  
107a▷  
`#!/bin/sh`  
`# mode=${2-slow}`  
`mode=${2-fast}`  
`root='pwd'`  
`indir=${root}/${3-input}`  
`tmpdir=${root}/tmp`  
`outdir=${root}/output`  
`acc="${1-sband350 sband500 sband800 sband1000 sband1600`

```

 tesla350 tesla500 tesla800 tesla1000 tesla1600
 tesla350-low tesla500-low tesla800-low tesla1000-low tesla1600-low
 xband350 xband500 xband800 xband1000 xband1600}"
```

107a `<circe1_fit.sh 106>+≡` △106 107b▷

```

xmkdir () {
 for d in "$@"; do
 mkdir $d 2>/dev/null || true
 done
}
rm -fr ${tmpdir}
xmkdir ${outdir} ${tmpdir}
```

107b `<circe1_fit.sh 106>+≡` △107a 107c▷

```

cd ${tmpdir}
cat /dev/null >${outdir}/Params.f90
for a in $acc; do
 case "$a" in
 1600) energy=TEV16;;
 1000) energy=TEV1;;
 800) energy=GEV800;;
 500) energy=GEV500;;
 3[56]0) energy=GEV350;;
 170) energy=GEV170;;
 90) energy=GEV090;;
 *) energy=GEV500;;
 esac
 cp ${indir}/${a}_${mode}/lumidiff-???.dat .
 ${root}/circe1_fit.bin
 rm -fr ${outdir}/${a}_${mode}
 mkdir ${outdir}/${a}_${mode}
 cp Slices.mp4 ${outdir}
 cp Errors.tex lumidiff-??x[0-9][0-9].??? ${outdir}/${a}_${mode}
 sed -e "s/@ENERGY@/$energy/g" \
 -e "s/@ACC@/'echo $a | tr a-z A-Z | tr -cd A-Z'/g" Parameters \
 >>${outdir}/Params.f90
done
cd ${root}
rm -fr ${tmpdir}
```

107c `<circe1_fit.sh 106>+≡` △107b 108a▷

```

cat >${outdir}/Params.tex <<'END'
\begin{table}
\begin{center}
\renewcommand{\arraystretch}{1.3}
\begin{tabular}{|c||c|c|c|c|}\hline
& \texttt{SBAND} & \texttt{TESLA} & \texttt{TESLA'} & \texttt{XBAND}\\
\hline\hline
\end{tabular}
END
```

Uses SBAND 13a, TESLA 13a, and XBAND 13a.

```

108a <circe1_fit.sh 106>+≡ ◁107c 108b▶
 line () {
 for a in $acc; do
 case $a in
 350 | *800* | *1000* | *1600*)
 ;;
 *) echo -n ', & '
 sed -n $1p ${outdir}/${a}_${mode}/Errors.tex
 ;;
 esac
 done
 echo '\\\\hline'
 }
 (echo '$\mathcal{L}/\text{fb}^{-1}\upsilon^{-1}$'; line 1
 echo '$\int d_{e^{\pm}}$'; line 2
 echo '$x_{e^{\pm}}^{\alpha}$'; line 3
 echo '$(1-x_{e^{\pm}})^{\alpha}$'; line 4
 echo '$\int d_{\gamma}$'; line 5
 echo 'x_{γ}^{α}'; line 6
 echo '$(1-x_{\gamma})^{\alpha}$'; line 7
) >>${outdir}/Params.tex

108b <circe1_fit.sh 106>+≡ ◁108a 108c▶
 cat >>${outdir}/Params.tex <<'END'
 \end{tabular}
 \end{center}
 \caption{\label{tab:param}}
 Version 1, revision 1997 04 16 of the beam spectra at 500 GeV.
 The rows correspond to the luminosity per effective year, the
 integral over the continuum and the powers in the factorized Beta
 distributions~(\ref{eq:beta}).}
 \end{table}
 END
 Uses beta 105.

108c <circe1_fit.sh 106>+≡ ◁108b 108d▶
 cat >>${outdir}/Params.tex <<'END'
 \begin{table}
 \begin{center}
 \renewcommand{\arraystretch}{1.3}
 \begin{tabular}{|c||c|c|c|c|}\hline
 & \texttt{SBAND} & \texttt{TESLA} & \texttt{TESLA'} & \texttt{XBAND}\\
 \hline\hline
 \end{tabular}
 END
 Uses SBAND 13a, TESLA 13a, and XBAND 13a.

108d <circe1_fit.sh 106>+≡ ◁108c 109a▶
 line () {
 for a in $acc; do
 case $a in
 1000)

```

```

 echo -n ' & '
 sed -n $1p ${outdir}/${a}_${mode}/Errors.tex
 ;;
 esac
done
echo '\\\\hline'
}
(echo '$\mathcal{L}/\text{fb}^{-1}\upsilon^{-1}$'; line 1
echo '$\int d_{e^{\pm}}$'; line 2
echo '$x_{e^{\pm}}^{\alpha}$'; line 3
echo '$(1-x_{e^{\pm}})^{\alpha}$'; line 4
echo '$\int d_{\gamma}$'; line 5
echo 'x_{γ}^{α}'; line 6
echo '$(1-x_{\gamma})^{\alpha}$'; line 7
) >>${outdir}/Params.tex

109a <circe1.fit.sh 106>+≡ ◇ 108d 109b ◇
cat >>${outdir}/Params.tex <<'END'
 \end{tabular}
 \end{center}
 \caption{\label{tab:param/TeV}%
 Version 1, revision 1997 04 17 of the beam spectra at 1 TeV.}
 \end{table}
END

109b <circe1.fit.sh 106>+≡ ◇ 109a 109c ◇
cat >>${outdir}/Params.tex <<'END'
\begin{table}
\begin{center}
\renewcommand{\arraystretch}{1.3}
\begin{tabular}{|c|c|c|c|c|}\hline
& 350 GeV & 500 GeV & 800 GeV & 1600 GeV
\hline\hline
\end{tabular}
END

109c <circe1.fit.sh 106>+≡ ◇ 109b 110a ◇
line () {
 for a in $acc; do
 case $a in
 tesla*-low)
 ;;
 tesla1000)
 ;;
 tesla*)
 echo -n ' & '
 sed -n $1p ${outdir}/${a}_${mode}/Errors.tex
 ;;
 esac
done
echo '\\\\hline'
}

```

```

(echo '$\mathcal{L}/\text{fb}^{-1}\upsilon^{-1}$'; line 1
echo '$\int d_e^{\pm}$'; line 2
echo '$x_e^{\pm}\alpha$'; line 3
echo '$(1-x_e^{\pm})^{\alpha}$'; line 4
echo '$\int d_{\gamma}$'; line 5
echo '$x_{\gamma}\alpha$'; line 6
echo '$(1-x_{\gamma})^{\alpha}$';
) >>${outdir}/Params.tex

110a <circel_fit.sh 106>+≡ ◁109c
 cat >>${outdir}/Params.tex <<'END'
 \end{tabular}
 \end{center}
 \caption{\label{tab:param}Tesla}
 Version 1, revision 1997 04 17 of the beam spectra for TESLA.
\end{table}
END
exit 0
Uses TESLA 13a.

```

## 7.2 Experimental

### 7.2.1 Quasi One Dimensional

```

110b <circel_minuit1.f90 110b>≡ ◁109c▷
 ! circel_minuit1.f90 -- fitting for circel
 <Copyleft notice 29b>
Uses circel 31b.

We're utilizing the familiar "MINUIT" package [15].
110c <circel_minuit1.f90 110b>+≡ ◁110b
 <Minuit1 module 110d>
 <Minuit1 main program 111a>

110d <Minuit1 module 110d>≡ (110c)
 module minuit1
 use kinds

 implicit none

 public :: fct
 public :: phi

contains

<Function to minimize 111c>

<Function phi1 112d>
end module minuit1

```

Defines:

minuit1, used in chunk 111a.  
Uses fct 95b 111c and phi 112d 116.

111a  $\langle$ Minuit1 main program 111a $\rangle \equiv$  (110c)

```
program fit
use kinds
use minuit1

implicit none
```

```
call minuit (fct, 0d0)
end program fit
```

Uses fct 95b 111c, fit 93b, and minuit1 110d.

111b  $\langle$ Minuit2 main program 111b $\rangle \equiv$  (115e)

```
program fit
use kinds
use minuit2
```

```
implicit none
```

```
call minuit (fct, 0d0)
end program fit
```

Uses fct 95b 111c, fit 93b, and minuit2 115f.

111c  $\langle$ Function to minimize 111c $\rangle \equiv$  (110d 115f)

```
subroutine fct (nx, df, f, a, mode, g)
integer, intent(in) :: nx, mode
real(kind=double) :: f, g
real(kind=double), dimension(:) :: df, a
<Local variables for fct 112a>
if (mode .eq. 1) then
 <Read input data 111d>
else if (mode .eq. 2) then
 <Calculate ∇f 99a>
end if
<Calculate f 112b>
if (mode .eq. 3) then
 <Write output 112c>
end if
end subroutine fct
```

Defines:

fct, used in chunks 93b, 95a, 110, 111, and 115f.

111d  $\langle$ Read input data 111d $\rangle \equiv$  (111c)

```
open (10, file = 'minuit.data')
do i = 1, NDATA
 do j = 1, NDATA
 read (10, *) xi(1,i,j), xi(2,i,j), fi(i,j), dfi(i,j)
 fi(i,j) = fi(i,j)/1d30
```

```

 dfi(i,j) = dfi(i,j)/1d30
 end do
end do
close (10)

112a <Local variables for fct 112a>≡ (111c)
 integer, parameter :: NDATA = 20
 real(kind=double) :: chi, chi2
 real(kind=double), dimension(2,NDATA,NDATA) :: xi
 real(kind=double), dimension(NDATA,NDATA) :: fi, dfi
 integer :: i, j, n

112b <Calculate f 112b>≡ (111c)
 f = 0d0
 do i = 1, NDATA
 do j = 1, NDATA
 if (dfi(i,j).gt.0d0) then
 f = f + ((phi(xi(1,i,j),xi(2,i,j),a) -
 - fi(i,j)) / dfi(i,j))**2
 end if
 end do
 end do
 Uses phi 112d 116.

112c <Write output 112c>≡ (111c)
 chi2 = 0d0
 n = 0
 open (10, file = 'minuit.fit')
 do i = 1, NDATA
 do j = 1, NDATA
 if (dfi(i,j).gt.0d0) then
 chi = (phi(xi(1,i,j),xi(2,i,j),a)-fi(i,j))/dfi(i,j)
 write (10,*) xi(1,i,j), xi(2,i,j), &
 1d30 * phi(xi(1,i,j),xi(2,i,j),a), &
 1d30 * fi(i,j), &
 chi
 chi2 = chi2 + chi**2
 n = n + 1
 else
 write (10,*) xi(1,i,j), xi(2,i,j), &
 1d30 * phi(xi(1,i,j),xi(2,i,j),a), &
 1d30 * fi(i,j)
 end if
 end do
 end do
 close (10)
 print *, 'CHI2 = ', chi2/n
 Uses phi 112d 116.

112d <Function phi1 112d>≡ (110d)
 function phi (e1, e2, a)
 real(kind=double) :: e1, e2

```

```

real(kind=double), dimension(17) :: a
real(kind=double) :: phi
real(kind=double) :: y1, y2
y1 = e1 / 250d0
y2 = e2 / 250d0
phi = exp (
 + a(1) * 1d0
 &
 + a(2) * log(y1)
 &
 + a(3) * log(1d0-y1)
 &
 + a(4) * log(-log(y1))
 &
 + a(5) * log(-log(1d0-y1))
 &
 + a(6) * y1
 &
 + a(7) * log(y1)**2
 &
 + a(8) * log(1d0-y1)**2
 &
 + a(9) * log(-log(y1))**2
 &
 + a(10) * log(-log(1d0-y1))**2 &
 + a(11) * y1**2
 &
 + a(12) / log(y1)
 &
 + a(13) / log(1d0-y1)
 &
 + a(14) / log(-log(y1))
 &
 + a(15) / log(-log(1d0-y1))
 &
 + a(16) / y1
 &
 + a(17) / (1d0-y1)
 &
 + a(2) * log(y2)
 &
 + a(3) * log(1d0-y2)
 &
 + a(4) * log(-log(y2))
 &
 + a(5) * log(-log(1d0-y2))
 &
 + a(6) * y2
 &
 + a(7) * log(y2)**2
 &
 + a(8) * log(1d0-y2)**2
 &
 + a(9) * log(-log(y2))**2
 &
 + a(10) * log(-log(1d0-y2))**2 &
 + a(11) * y2**2
 &
 + a(12) / log(y2)
 &
 + a(13) / log(1d0-y2)
 &
 + a(14) / log(-log(y2))
 &
 + a(15) / log(-log(1d0-y2))
 &
 + a(16) / y2
 &
 + a(17) / (1d0-y2)
)
end function phi

```

Defines:

phi, used in chunks 110d, 112, and 115f.

113 ⟨circe1\_minuit1.sh 113⟩≡  
 #! /bin/sh  
 minuit\_bin='pwd'/circe1\_minuit1.bin  
 ⟨Process arguments 114a⟩  
 (

```

 ⟨Define parameters 114d⟩
 ⟨Fix parameters 114e⟩
 ⟨Fix strategy 115a⟩
 ⟨Run Minuit 115b⟩
) | eval "$minuit_bin $filter"
⟨Maybe plot results 115c⟩
exit 0

114a ⟨Process arguments 114a⟩≡ (113 117a) 114b▷
 tmp="$IFS"
 IFS=:
 args=":$*:"
 IFS="$tmp"

114b ⟨Process arguments 114a⟩+≡ (113 117a) ▷114a 114c▷
 filter="| \
 awk '/STATUS=(CONVERGED|CALL LIMIT|FAILED)/ { p=1; print }; \
 @.* \.00000 *fixed/ { next }; \
 /EDM=|CHI2|@/ && p { print }' "

114c ⟨Process arguments 114a⟩+≡ (113 117a) ▷114b
 case "$args" in
 :v:) filter=;;
 esac

114d ⟨Define parameters 114d⟩≡ (113)
 cat <<END
 set title
 CIRCE
 parameters
 1 '@ 1 , 0.00 0.01
 2 '@ lx , 0.20 0.01
 3 '@ l(1-x) , 0.20 0.01
 4 '@ llx , 0.00 0.01
 5 '@ ll(1-x), 0.00 0.01
 6 '@ x , 0.00 0.01
 7 '@ lx^2 , 0.00 0.01
 8 '@ l(1-x)^2, 0.00 0.01
 9 '@ llx^2 , 0.00 0.01
 10 '@ ll(1-x)^2, 0.00 0.01
 11 '@ x^2 , 0.00 0.01
 12 '@ 1/lx , 0.00 0.01
 13 '@ 1/l(1-x), 0.00 0.01
 14 '@ 1/llx , 0.00 0.01
 15 '@ 1/ll(1-x), 0.00 0.01
 16 '@ 1/x , 0.00 0.01
 17 '@ 1/(1-x) , 0.00 0.01

 END

114e ⟨Fix parameters 114e⟩≡ (113)
 for p in 1 2 3 4 5 6 7 8 9 10 \

```

```

11 12 13 14 15 16 17; do
case "$args" in
 :$p=) val='echo "$args" | sed 's/.*/"$p"'/=\\\([0-9.-]*\\):.*\\1/'';
 echo set parameter $p $val;
 echo fix $p;;
 :$p:) ;;
 *) echo fix $p;;
esac
done

115a <Fix strategy 115a>≡ (113 117a)
case "$args" in
 :$0:) echo set strategy 0;;
 :$1:) echo set strategy 1;;
 :$2:) echo set strategy 2;;
esac

115b <Run Minuit 115b>≡ (113 117a)
cat <<END
migrat 10000 0.01
stop
END

115c <Maybe plot results 115c>≡ (113 117a)
case "$args" in
 :$p:) awk '$5 != "' { print $1, $2, $5 }' minuit.fit > chi2
 awk '$5 != "' { print $1, $5 }' minuit.fit > chix
 awk '$5 != "' { print $2, $5 }' minuit.fit > chiy
 gnuplot -geometry -0+0 plot2 >/dev/null 2>&1
esac
Uses fit 93b.

```

### 7.2.2 Quasi Two Dimensional

```

115d <circe1_minuit2.f90 115d>≡ 115e▷
 ! minuit2.f90 -- fitting for circe
 <Copyleft notice 29b>
Uses circe 31b and minuit2 115f.

115e <circe1_minuit2.f90 115d>+≡ ▷115d
 <Minuit2 module 115f>
 <Minuit2 main program 111b>

115f <Minuit2 module 115f>≡ (115e)
 module minuit2
 use kinds

 implicit none

 public :: fct
 public :: phi

```

contains

```
<Function to minimize 111c>
<Function phi2 116>
end module minuit2
```

Defines:

minuit2, used in chunks 111b and 115d.  
Uses fct 95b 111c and phi 112d 116.

116 <Function phi2 116>≡ (115f)

```
function phi (e1, e2, a)
 real(kind=double) :: e1, e2
 real(kind=double), dimension(33) :: a
 real(kind=double) :: phi
 real(kind=double) :: y1, y2
 y1 = e1 / 250d0
 y2 = e2 / 250d0
 phi = exp (
 + a(1) * 1d0
 + a(2) * log(y1)
 + a(3) * log(1d0-y1)
 + a(4) * log(-log(y1))
 + a(5) * log(-log(1d0-y1))
 + a(6) * y1
 + a(7) * log(y1)**2
 + a(8) * log(1d0-y1)**2
 + a(9) * log(-log(y1))**2
 + a(10) * log(-log(1d0-y1))**2
 + a(11) * y1**2
 + a(12) / log(y1)
 + a(13) / log(1d0-y1)
 + a(14) / log(-log(y1))
 + a(15) / log(-log(1d0-y1))
 + a(16) / y1
 + a(17) / (1d0-y1)
 + a(18) * log(y2)
 + a(19) * log(1d0-y2)
 + a(20) * log(-log(y2))
 + a(21) * log(-log(1d0-y2))
 + a(22) * y2
 + a(23) * log(y2)**2
 + a(24) * log(1d0-y2)**2
 + a(25) * log(-log(y2))**2
 + a(26) * log(-log(1d0-y2))**2
 + a(27) * y2**2
 + a(28) / log(y2)
 + a(29) / log(1d0-y2)
 + a(30) / log(-log(y2))
 + a(31) / log(-log(1d0-y2))
 + a(32) / y2
)
```

```

+ a(33) / (1d0-y2)
)
end function phi
```

Defines:

phi, used in chunks 110d, 112, and 115f.

```

117a <circe1_minuit2.sh 117a>≡
 #! /bin/sh
 minuit_bin='pwd'/circe1_minuit2.bin
 <Process arguments 114a>
 (
 <Define parameters (2dim) 117b>
 <Fix parameters (2dim) 118>
 <Fix strategy 115a>
 <Run Minuit 115b>
) | eval "$minuit_bin $filter"
 <Maybe plot results 115c>
 exit 0

117b <Define parameters (2dim) 117b>≡ (117a)
 cat <<END
 set title
 CIRCE
 parameters
 1 '@ 1 , 0.00 0.01
 2 '@ lx , 0.20 0.01
 3 '@ l(1-x) , 0.20 0.01
 4 '@ llx , 0.00 0.01
 5 '@ ll(1-x) , 0.00 0.01
 6 '@ x , 0.00 0.01
 7 '@ lx^2 , 0.00 0.01
 8 '@ l(1-x)^2 , 0.00 0.01
 9 '@ llx^2 , 0.00 0.01
 10 '@ ll(1-x)^2 , 0.00 0.01
 11 '@ x^2 , 0.00 0.01
 12 '@ 1/lx , 0.00 0.01
 13 '@ 1/l(1-x) , 0.00 0.01
 14 '@ 1/llx , 0.00 0.01
 15 '@ 1/ll(1-x) , 0.00 0.01
 16 '@ 1/x , 0.00 0.01
 17 '@ 1/(1-x) , 0.00 0.01
 18 '@ ly , 0.20 0.01
 19 '@ l(1-y) , 0.20 0.01
 20 '@ lly , 0.00 0.01
 21 '@ ll(1-y) , 0.00 0.01
 22 '@ y , 0.00 0.01
 23 '@ ly^2 , 0.00 0.01
 24 '@ l(1-y)^2 , 0.00 0.01
 25 '@ lly^2 , 0.00 0.01
 26 '@ ll(1-y)^2 , 0.00 0.01
```

```

27 '@ y^2 , 0.00 0.01
28 '@ 1/ly , 0.00 0.01
29 '@ 1/l(1-y) , 0.00 0.01
30 '@ 1/lly , 0.00 0.01
31 '@ 1/l1(1-y), 0.00 0.01
32 '@ 1/y , 0.00 0.01
33 '@ 1/(1-y) , 0.00 0.01

END

118 <Fix parameters (2dim) 118>≡ (117a)
for p in 1 2 3 4 5 6 7 8 9 10 \
 11 12 13 14 15 16 17 18 19 20 \
 21 22 23 24 25 26 27 28 29 30 \
 31 32 33; do
 case "$args" in
 :$p=) val='echo "$args" | sed 's/.*/"$p"'\=\\\([0-9.-]*\\):.*\\\1/'';
 echo set parameter $p $val;
 echo fix $p;;
 :$p:) ;;
 *) echo fix $p;;
 esac
done

```

### 7.3 Version 2

## 8 Conclusions

I have presented a library of simple parameterizations of realistic  $e^\pm$ - and  $\gamma$ -beam spectra at future linear  $e^+e^-$ -colliders. The library can be used for integration and event generation. Emphasis is put on simplicity and reproducibility of the parameterizations for supporting reproducible physics simulations.

### Acknowledgements

Daniel Schulte made his simulation code **Guinea-Pig** available and answered questions. Harald Anlauf and Torbjörn Sjöstrand have contributed useful suggestions. The Tesla group at DESY/Zeuthen made error estimates feasible by donating time on the multi-headed number cruncher **Hydra**. The 1996 ECFA/Desy Linear Collider Workshop got me started and provided support. Thanks to all of them.

### Identifiers

**beta:** [59b](#), [61d](#), [65c](#), [70b](#), [71e](#), [75a](#), [99d](#), [101a](#), [101c](#), [102c](#), [102e](#), [103d](#), [105](#),  
[108b](#)  
**C1\_ELECTRON:** [11b](#), [21e](#), [31b](#), [73b](#), [80c](#), [81a](#)  
**C1\_PHOTON:** [11b](#), [31b](#), [73b](#), [80c](#), [81a](#), [87](#)  
**C1\_POSITRON:** [11b](#), [22](#), [81a](#)

circe: 11a, 30a, 31a, 31b, 87, 93b, 110b, 115d  
 circee: 14, 15c, 15e, 16a, 16c, 31b, 41f, 41g, 42a  
 circeg: 14, 31b, 42b, 42c, 43a  
 circel: 12a, 41d, 41e  
 circem: 32h, 33a, 33c, 33d, 34a, 34b, 36a, 36b, 36c, 37b, 37d, 38a, 38c, 38e,  
     39a, 39b, 39d, 50b, 50c, 51a, 53a, 53b, 54c, 54d, 55a, 56d, 57a, 57d, 61a, 61b,  
     63a, 63b, 63c, 65a, 68b, 69a, 69b, 79b, 84c, 86d, 86e  
 circes: 12b, 17b, 21c, 31c, 32a, 32g, 35f, 87, 91b  
 circex: 35e, 35f  
 circgg: 14, 31b, 43b, 43c, 43d, 81a  
 CLIC: 13a, 35d  
 d1: 15c, 15f, 16a, 41g, 42a, 42c, 43a, 43c, 43d, 74b, 75c, 75d, 76a, 76c, 77a  
 d12: 15c, 15d, 15e  
 d12a: 16e, 16g, 17a  
 d2: 15c, 16b, 16c, 41g, 42a, 42c, 43a, 43c, 43d, 74b, 75c, 75d, 76a, 76c, 77a  
 fct: 93b, 95a, 95b, 110d, 111a, 111b, 111c, 115f  
 fit: 93b, 94d, 111a, 111b, 115c  
 fixerr: 97a, 97b, 97c  
 gauss1: 15c, 89e, 89f  
 gauss2: 15c, 16e, 90c, 90d  
 gaussx: 90a, 90b, 90d  
 gethst: 95d, 95f, 96a  
 girce: 20a, 80b, 80c  
 girceb: 82a, 82d, 83c, 84a, 84b, 84c, 86b  
 gircee: 20c, 20d, 21d, 80c, 81d, 81e  
 girceg: 20c, 80c, 82b, 82c  
 gircgg: 20c, 80c, 83a, 83b, 83c  
 ILC: 13a, 35d, 69a, 70c, 71b, 92  
 JLCNLC: 13a, 17b, 18, 35d, 57a, 60a, 60c, 61b, 62c, 62e, 63b, 66c, 67c, 92  
 kirke: 73a, 73b  
 kirkee: 17a, 73b, 74a, 74b, 75c  
 kirkeg: 73b, 75d, 76b, 76c  
 kirkgg: 73b, 76a, 76d, 77a  
 minuit1: 110d, 111a  
 minuit2: 111b, 115d, 115f  
 NACC: 13b, 17b, 34b, 35c, 35f, 40c, 41a, 41b, 41c, 44c, 45a, 46b, 46c, 47b, 47c,  
     51d, 53e, 56a, 59c, 62a, 66a  
 NPARAM: 94a, 94b, 94d, 101b  
 phi: 110d, 112b, 112c, 112d, 115f, 116  
 phie: 99b, 99f, 100b, 100c, 103a  
 phig: 99b, 99f, 100d, 100e, 103a  
 splice: 103a, 103c, 103d  
 random: 20d, 21a, 21b, 21d  
 rng\_call: 79a, 79b  
 rng\_generate: 79e, 80a  
 rng\_proc: 78b, 79c  
 rng\_type: 78b, 79d, 79e, 80a  
 SBAND: 13a, 35d, 40d, 40e, 44a, 44b, 45b, 46a, 46d, 47a, 47d, 49b, 50a, 92,  
     107c, 108c  
 SBNDEE: 13a, 34b, 35d, 41b, 44c, 46b, 47b, 48, 49a, 92

```

scale: 98c, 98d, 98e
sigma: 15a, 15b, 15c, 15e, 16a, 16c, 16e, 17a, 18, 20d
sumsqu: 97d, 98a, 98b
TESLA: 13a, 32e, 32h, 35d, 40d, 40e, 44a, 45b, 46d, 47d, 49b, 50c, 51e, 52a,
 52b, 53b, 54a, 54b, 54d, 56b, 56c, 57a, 57d, 59d, 60b, 62b, 62d, 66b, 67b,
 91b, 92, 107c, 108c, 110a
TESLEE: 13a, 34b, 35d, 48, 92
XBAND: 13a, 40d, 40e, 44a, 44b, 45b, 46a, 46d, 47a, 47d, 49b, 50a, 57d, 107c,
 108c
XBNDEE: 13a, 34b, 35d, 48, 49a, 91b, 92

```

## Refinements

```

⟨4-byte aligned part of circe1 parameters 32e⟩
⟨8-byte aligned part of circe1 parameters 32d⟩
⟨circe.h 30a⟩
⟨circe1.f90 29a⟩
⟨circe1.fit.f90: public 95a⟩
⟨circe1.fit.f90: subroutines 95b⟩
⟨circe1_fit.f90 93b⟩
⟨circe1_fit.sh 106⟩
⟨circe1_minuit1.f90 110b⟩
⟨circe1_minuit1.sh 113⟩
⟨circe1_minuit2.f90 115d⟩
⟨circe1_minuit2.sh 117a⟩
⟨circe1_plot.f90 87⟩
⟨circe1_sample.f90: public 15a⟩
⟨circe1_sample.f90: subroutines 15b⟩
⟨circe1_sample.f90 17b⟩
⟨else handle invalid versions 37b⟩
⟨EPS & PWR 16d⟩
⟨formats for circes 38d⟩
⟨params.f90 91b⟩
⟨x1m, x2m kludge, part 1 81b⟩
⟨x1m, x2m kludge, part 2 81c⟩
⟨Abstract interfaces 79c⟩
⟨Abstract types 79e⟩
⟨Accelerator codes 13a⟩
⟨Alternative: Local variables for circes 75b⟩
⟨Alternative: Subroutines 77b⟩
⟨Alternative: Update circe1 parameters 75a⟩
⟨API documentation 11a⟩
⟨Calculate ∇f 99a⟩
⟨Calculate f 112b⟩
⟨Calculate f (v_1) 99b⟩
⟨Calculate version 1 of the $\gamma\gamma$ distribution 43d⟩
⟨Calculate version 1 of the e^+e^- distribution 42a⟩
⟨Calculate version 1 of the $e^\pm\gamma$ distribution 43a⟩
⟨Calculate version 1 of the non-singular $\gamma\gamma$ distribution 76a⟩

```

⟨Calculate version 1 of the non-singular  $e^+e^-$  distribution 75c⟩  
 ⟨Calculate version 1 of the non-singular  $e^\pm\gamma$  distribution 75d⟩  
 ⟨Check a and b 84c⟩  
 ⟨Code that has to be at the top 125c⟩  
 ⟨Copyleft notice 29b⟩  
 ⟨Declaration of accnam 35c⟩  
 ⟨Declaration: circe1 parameters 32c⟩  
 ⟨Declare NPARAM 94a⟩  
 ⟨Declare arguments 94c⟩  
 ⟨Declare parameters 94b⟩  
 ⟨Define parameters 114d⟩  
 ⟨Define parameters (2dim) 117b⟩  
 ⟨Event generation 21d⟩  
 ⟨Fix parameters 114e⟩  
 ⟨Fix parameters (2dim) 118⟩  
 ⟨Fix strategy 115a⟩  
 ⟨Fixup errors 97a⟩  
 ⟨Function call stub 89a⟩  
 ⟨Function phi1 112d⟩  
 ⟨Function phi2 116⟩  
 ⟨Function to minimize 111c⟩  
 ⟨Gauss integration 15c⟩  
 ⟨Gaussian weights 91a⟩  
 ⟨Generate a trial x and calculate its weight w 85a⟩  
 ⟨Generate version 1 of the  $\gamma\gamma$  distribution 83c⟩  
 ⟨Generate version 1 of the  $e^+e^-$  distribution 82a⟩  
 ⟨Generate version 1 of the  $e^\pm\gamma$  distribution 82d⟩  
 ⟨Give up on f 99e⟩  
 ⟨Initialization check 32g⟩  
 ⟨Initialization of accnam 35d⟩  
 ⟨Initializations for circes 35b⟩  
 ⟨Initialize circe1 parameters 32h⟩  
 ⟨Initialize event generator 21c⟩  
 ⟨Initialize parameters for circe1\_fit.f90 94e⟩  
 ⟨Linearly interpolate energies 57d⟩  
 ⟨Linearly interpolate energies for ILC 2013 69b⟩  
 ⟨Linearly interpolate energies for JLC/NLC 2002 63c⟩  
 ⟨Linearly interpolate energies for NLC H 2002 65a⟩  
 ⟨Literate programming example 125a⟩  
 ⟨Load parameters 94d⟩  
 ⟨Local variables for circes 33b⟩  
 ⟨Local variables for fct 112a⟩  
 ⟨Local variables for fct (v1) 95e⟩  
 ⟨Log energy mapping 39d⟩  
 ⟨Log revision mapping 38a⟩  
 ⟨Main module 30b⟩  
 ⟨Map roots to e 38c⟩  
 ⟨Map roots to e at low energies 55a⟩  
 ⟨Maybe plot results 115c⟩  
 ⟨Minuit1 main program 111a⟩

```

⟨Minuit1 module 110d⟩
⟨Minuit2 main program 111b⟩
⟨Minuit2 module 115f⟩
⟨Module subroutines 31b⟩
⟨Monte Carlo integration 20d⟩
⟨Normalize 97d⟩
⟨Other code 125b⟩
⟨Other variables in sample 19⟩
⟨Part one of Gaussian integration 88⟩
⟨Part three of Gaussian integration 89d⟩
⟨Part two of Gaussian integration 89b⟩
⟨Particle codes 11b⟩
⟨Private parameters 37c⟩
⟨Process arguments 114a⟩
⟨Public subroutines 31a⟩
⟨Public types 79d⟩
⟨Read continuum, summing in s 96b⟩
⟨Read data from file 95d⟩
⟨Read double δ, summing in t 96e⟩
⟨Read input data 111d⟩
⟨Read input data (v1) 95c⟩
⟨Read single δ, summing in t 96c⟩
⟨RNG dummy arguments 78a⟩
⟨RNG dummy declarations 78b⟩
⟨RNG: generate u 79a⟩
⟨Run Minuit 115b⟩
⟨Sample output 18⟩
⟨Second Gauss integration 16e⟩
⟨Select particles p1 and p2 81a⟩
⟨Set up girceb parameters 84d⟩
⟨Set up best value for t 86c⟩
⟨uniform deviate on [0, 1] (never defined)⟩
⟨Update circe1 parameters 33a⟩
⟨Update version 1 derived parameters in circe1 parameters 37d⟩
⟨Update version 10 derived parameters in circe1 parameters 68b⟩
⟨Update version 3 and 4 derived parameters in circe1 parameters 50c⟩
⟨Update version 5 derived parameters in circe1 parameters 53a⟩
⟨Update version 6 derived parameters in circe1 parameters 54c⟩
⟨Update version 7 derived parameters in circe1 parameters 56d⟩
⟨Update version 8 derived parameters in circe1 parameters 61a⟩
⟨Update version 9 derived parameters in circe1 parameters 63a⟩
⟨Version 2 has been retired 50b⟩
⟨Warn that no parameter set has been endorsed for e-e- yet 36a⟩
⟨Write output 112c⟩
⟨Write output (v1) 101a⟩

```

## **Index**

inefficiencies, [19](#), [81](#)

System dependecies, [103](#)

## References

- [1] H. Murayama and M. E. Peskin, SLAC-PUB-7149, to appear in *Ann. Rev. Nucl. Part. Sci.*; P. Zerwas, DESY 94-001-REV.
- [2] P. Chen and R. J. Noble, SLAC-PUB-4050; M. Bell and J. S. Bell, Part. Accl. **24**, 1 (1988); R. Blankenbecler and S. D. Drell, Phys. Rev. Lett. **61**, 2324 (1988); P. Chen and K. Yokoya, Phys. Rev. Lett. **61**, 1101 (1988); M. Jacob and T. T. Wu, Nucl. Phys. **B303**, 389 (1988); V. N. Baier, V. M. Katkov, and V. M. Strakovenkov, Nucl. Phys. **B328**, 387 (1989); R. Blankenbecler, S. D. Drell, and N. Kroll, Phys. Rev. **D40**, 2462 (1989); P. Chen and V. L. Telnov, Phys. Rev. Lett. **63**, 1796 (1989).
- [3] K. Yokoya, KEK 85-9, KEK.
- [4] P. Chen *et al.*, Nucl. Inst. Meth. **A355**, 107 (1995).
- [5] D. Schulte, Ph.D. thesis, in preparation.
- [6] R. B. Palmer, Ann. Rev. Nucl. Part. Sci. **40**, 529 (1990).
- [7] P. Chen, Phys. Rev. **D46**, 1186 (1992).
- [8] Tesla Collaboration, Conceptual Design Report, in preparation.
- [9] Desy-Darmstadt Linear Collider Collaboration, Conceptual Design Report, in preparation.
- [10] JLC Group, KEK Report 92-16.
- [11] NLC ZDR Design Group, SLAC-Report-474.
- [12] NLC ZDR Design Group and NLC Physics Working Groups, SLAC-Report-485.
- [13] Particle Data Group, Phys. Rev. **D50**, 1173 (1994).
- [14] G. Altarelli, R. Kleiss, and C. Verzegnassi, CERN Yellow Report 89-08.
- [15] F. James and M. Roos, *MINUIT, Function Minimization and Error Analysis, Release 89.12j*, CERN, Geneva, 1989.
- [16] H. Anlauf, IKDA 96/6.
- [17] H. Anlauf, private communication.
- [18] A. Atkinson and J. Whittaker, Appl. Stat. **28**, 90 (1979).
- [19] D. E. Knuth, *Literate Programming*, Vol. 27 of *CSLI Lecture Notes* (Center for the Study of Language and Information, Leland Stanford Junior University, Stanford, CA, 1991).
- [20] D. E. Knuth, *T<sub>E</sub>X: The Program*, Vol. B of *Computers & Typesetting* (Addison-Wesley, Reading, Mass., 1986).
- [21] D. E. Knuth, *METAFONT: The Program*, Vol. D of *Computers & Typesetting* (Addison-Wesley, Reading, Mass., 1986).
- [22] N. Ramsey, IEEE Software **11**, 97 (1994).

## A Literate Programming

### A.1 Paradigm

I have presented the sample code in this paper using the *literate programming* paradigm. This paradigm has been introduced by Donald Knuth [19] and his programs TEX [20] and METAFONT [21] provide excellent examples of the virtues of literate programming. Knuth summarized his intention as follows ([19], p. 99)

“Let us change our traditional attitude to the construction of programs. Instead of imagining that our main task is to instruct a computer what to do, let us concentrate rather on explaining to *human beings* what we want a computer to do.”

Usually, literate programming uses two utility programs to produce two kinds of files from the source

`tangle` produces the computer program that is acceptable to an “illiterate” (Fortran, C, etc.) compiler. This process consists of stripping documentation and reordering code. Therefore it frees the author from having to present the code in the particular order enforced by a compiler for purely technical reasons. Instead, the author can present the code in the order that is most comprehensible.

`weave` produces a document that describes the program. Extensive cross referencing of the code sections is usually provided, which has been suppressed in this paper. If a powerful typesetting system (such a TEX) is used, the document can present the algorithms in clear mathematical notation alongside the code. These features improve readability and maintainability of scientific code immensely.

### A.2 Practice

Circe1 uses the `noweb` [22] system. This system has the advantage to work with any traditional programming language and support the essential features described in section A.1 with minimal effort. `noweb`’s `tangle` program only reorders the code sections, but does not reformat them. Therefore its output can be used just like any other “illiterate” program.

The examples above should be almost self-explaining, but in order to avoid any ambiguities, I give another example:

125a *⟨Literate programming example 125a⟩≡  
⟨Code that has to be at the top 125c⟩  
⟨Other code 125b⟩*

I can start the presentation with the first line of the “other code”:

125b *⟨Other code 125b⟩≡  
line 1 of the other code* (125a) 126a▷

If appropriate, the first line of the code that has to appear *before* the other code can be presented later:

125c *⟨Code that has to be at the top 125c⟩≡  
line 1 of the code at the top* (125a) 126b▷

Now I can augment the sections:

126a *(Other code 125b)* +≡ (125a) ↳ 125b

line 2 of the other code

126b *(Code that has to be at the top 125c)* +≡ (125a) ↳ 125c

line 2 of the code at the top

The complete “program” will be presented to the compiler as

```
line 1 of the code at the top
line 2 of the code at the top
line 1 of the other code
line 2 of the other code
```

The examples in section 3.1.1 show that this reordering is particularly useful for declaring variables when they are first used (rather than at the beginning) and for zooming in on code inside of loops.

## B Fortran Name Space

In addition to the ten procedures and one `common` block discussed in section 3

- `circe`, `circee`, `circeg`, `circgg`,
- `girce`, `gircee`, `girceg`, `gircgg`,
- `circes`, `circel`, `/circom/`,

there are two more globally visible functions which are used internally:

- `circem`: error message handler,
- `girceb`: efficient Beta distribution generator.

Even if the `/circom/` is globally visible, application programs *must not* manipulate it directly. The `circes`, subroutine is provided for this purpose and updates some internal parameters as well.

With features from the current Fortran standard (Fortran90), I could have kept the last two functions and the `common` block private.

Application programs wishing to remain compatible with future versions of `Circe1` must not use `common` blocks or procedures starting with `circe` or `girce`.

## C Updates

Information about updates can be obtained

- on the World Wide Web:

<http://projects.hepforge.org/whizard/>

Contributions of results from other simulation programs and updated accelerator designs are welcome at

[ohl@physik.uni-wuerzburg.de](mailto:ohl@physik.uni-wuerzburg.de)